

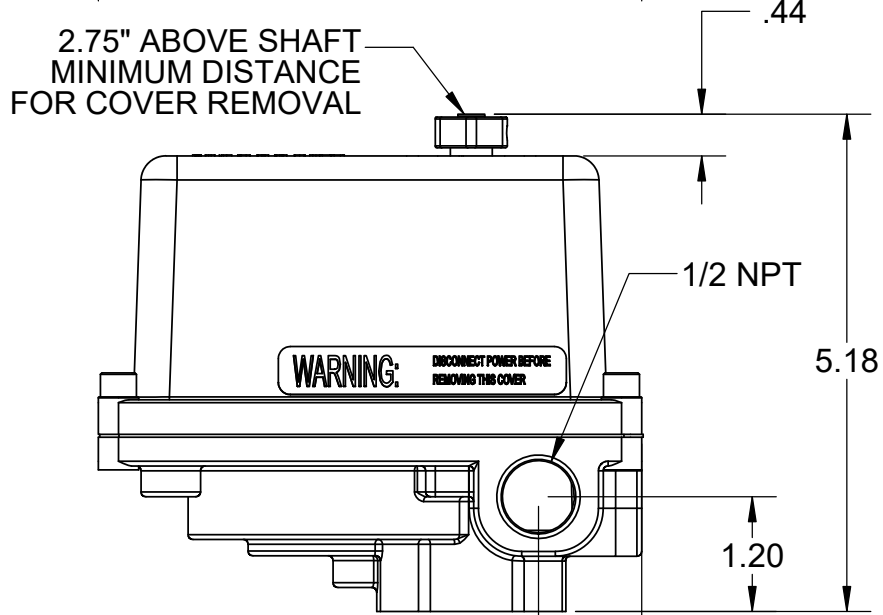
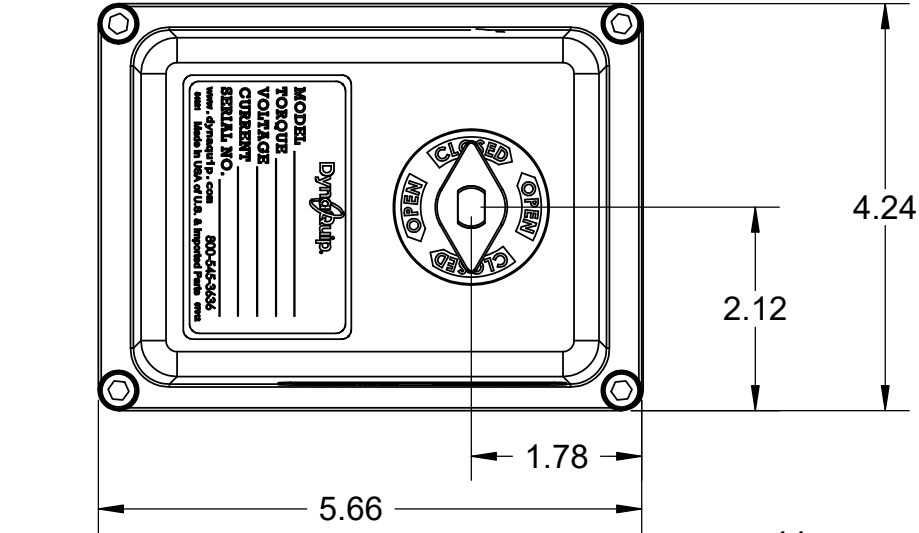


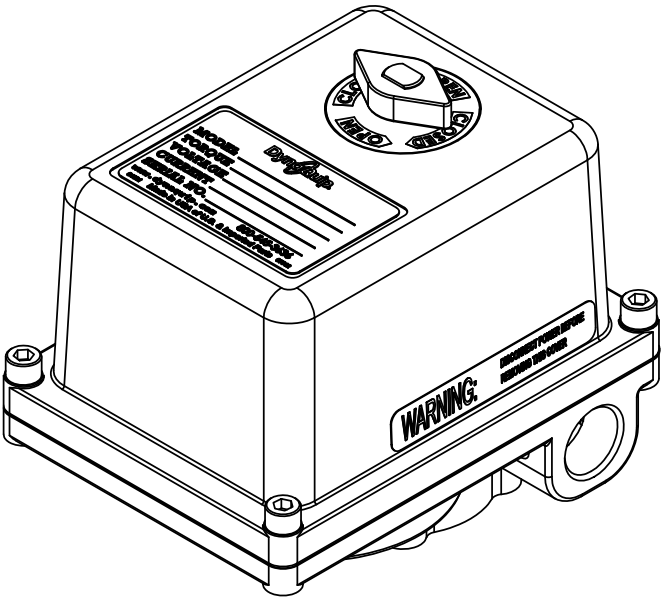

NEMA 4X ENCLOSURE

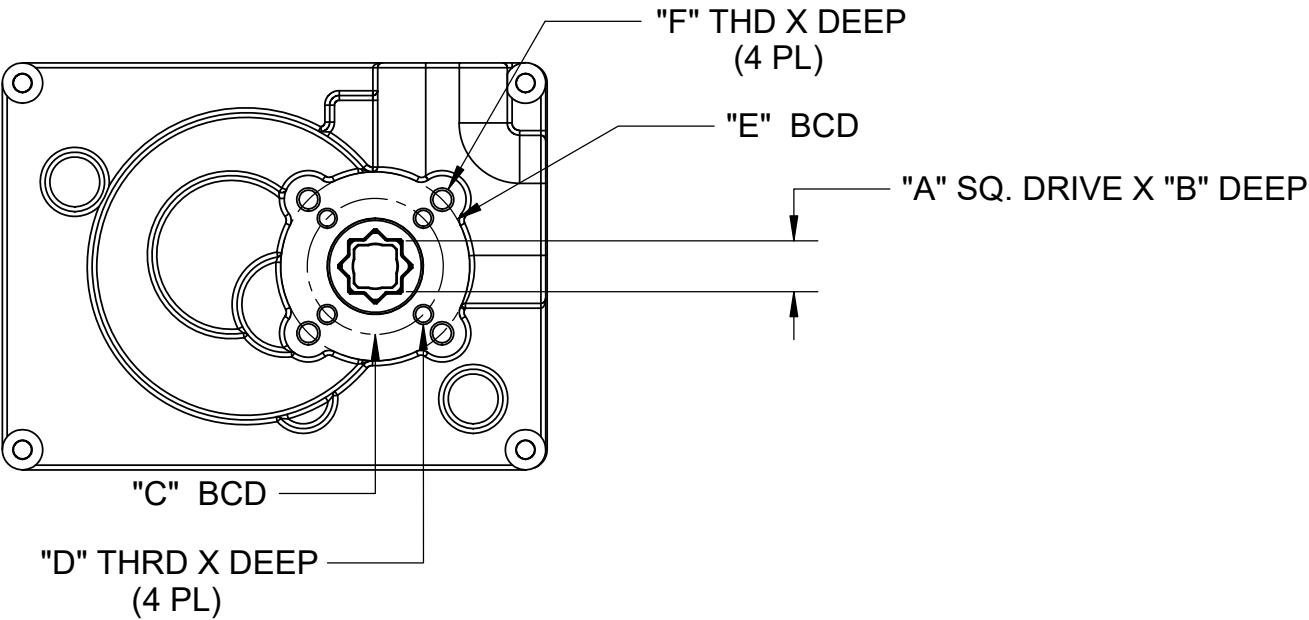

ENCLOSURE - NEMA 4X, ALUMINUM DIE CAST
POLYURETHANE ENAMEL COATING
FASTENERS - STAINLESS STEEL
HEAT TREATED STEEL GEARING, LUBRICATED FOR LIFE
50% RATED DUTY CYCLE REVERSING MOTOR
WITH THERMAL OVERLOAD PROTECTION
2 EXTRA LIMIT SWITCHES AVAILABLE
HEATER & THERMOSTAT STANDARD ON LOW VOLTAGE UNITS
WHEN POWERED, HEATER TURNS ON BELOW 85°F TURNS OFF AT 88°F)
SWITCH RATING - 5A 125/250 VAC
POSITION INDICATOR - NYLON
AMBIENT TEMPERATURE RATING; -40°F TO +150°F
VOTAGES; 120 1Ph., 60 Hz VAC
12 - 24 VDC / VAC

MODEL NO.	TORQUE IN-LB	SPEED SEC/90°	"A"	"B"	"C"	"D"	"E"	"F"	AMPS LOCKED ROTOR		WT. LBS
									AC	12-24 DC/AC	
DE153	150	2.5	.354 (9 mm)	.53	1.417 (F03)	M5 .44 DP	1.969 (F05)	M6 .46 DP	.5	3.0	4.0
DE154	150	2.5	.433 (11mm)	.68	1.654 (F04)	M5 .44 DP	-----	-----	.5	3.0	4.0
DE155	150	2.5	.551 (14mm)	.68	1.417 (F03)	M5 .44 DP	1.969 (F05)	M6 .46 DP	.5	3.0	4.0
DE156	150	2.5	.354 (9 mm)	.53	1.654 (F04)	M5 .44 DP	-----	-----	.5	3.0	4.0
DE304	300	6	.433 (11mm)	.68	1.654 (F04)	M5 .44 DP	-----	-----	.5	3.0	4.0
DE305	300	6	.551 (14mm)	.68	1.417 (F03)	M5 .46 DP	1.969 (F05)	M6 .46 DP	.5	3.0	4.0

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. DE SERIES FILE NO. SUB219

TITLE DE1 & DE3 SERIES
ELECTRIC ACTUATOR

DR	DATE	CHK'D	DATE	ENGR	DATE
MJP	10-19-22	MJP	02-17-15	MJP	02-17-15

