



Model	E3S21AJE23	E3S22AJE23	E3S23AJE23	E3S24AJE23	E3S25AJE21	E3S26AJE24	E3S27AJE25	E3S28AJE07	E3S29AJE02	E3S2AAJE02	E3S2BAJE14
Size	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	2 1/2 NPT	3 NPT	4 NPT
Cv	10	16	37	68	109	185	268	486	843	1150	2055
WOG	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi
A	2.17	2.36	2.95	3.15	3.54	4.33	4.72	5.51	7.28	8.07	9.45
B	0.31	0.39	0.59	0.79	0.98	1.26	1.50	1.97	2.56	2.99	3.94
C	1.59	1.59	1.59	1.77	1.87	2.19	2.57	2.87	4.13	4.39	5.35
D	6.77	6.77	6.77	6.95	7.05	7.37	7.75	10.60	14.17	14.43	18.10
E	4.24	4.24	4.24	4.24	4.24	4.24	4.24	4.49	7.87	7.87	7.87
F	5.66	5.66	5.66	5.66	5.66	5.66	5.66	---	---	---	---
G	5.18	5.18	5.18	5.18	5.18	5.18	5.18	7.73	10.04	10.04	12.75
H	---	---	---	---	---	---	---	---	13.00	13.00	13.75
Actuator	DE156	DE156	DE156	DE156	DE154	DE304	DE305	MA4	MA13	MA13	MA26
Wt. lbs	5.30	5.30	5.30	5.80	6.60	7.70	10.40	15.21	43.60	50.40	70.00
Sized for Max. Δ PSI	500 psi	500 psi	500 psi	500 psi	500 psi	300 psi	300 psi	300 psi	300 psi	300 psi	300 psi
Media Temp	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F
Ambient Temp	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 149°F	-4° / 149°F	-4° / 149°F	-4° / 149°F

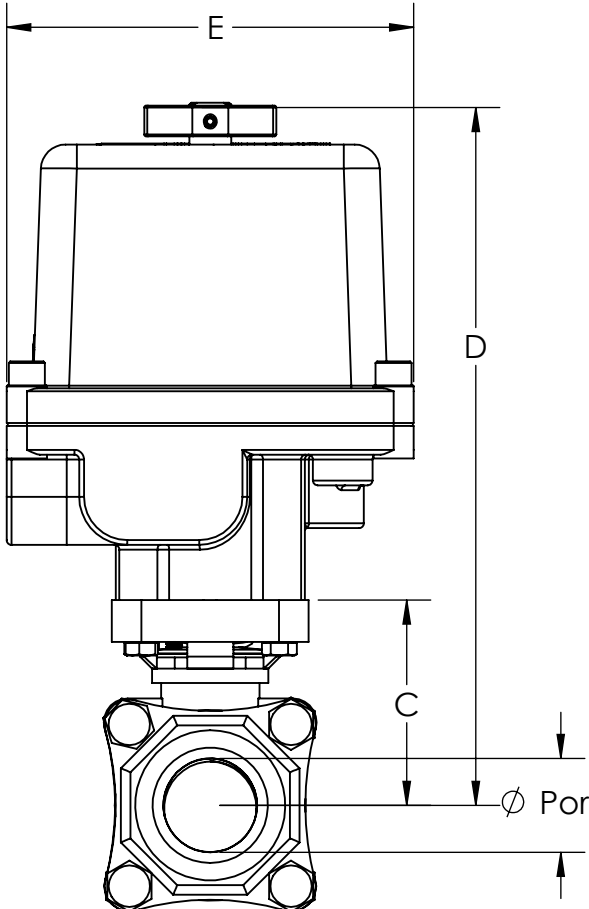

3.00 Above Shaft
Minimum Distance
For Cover Removal

DE Series Actuator

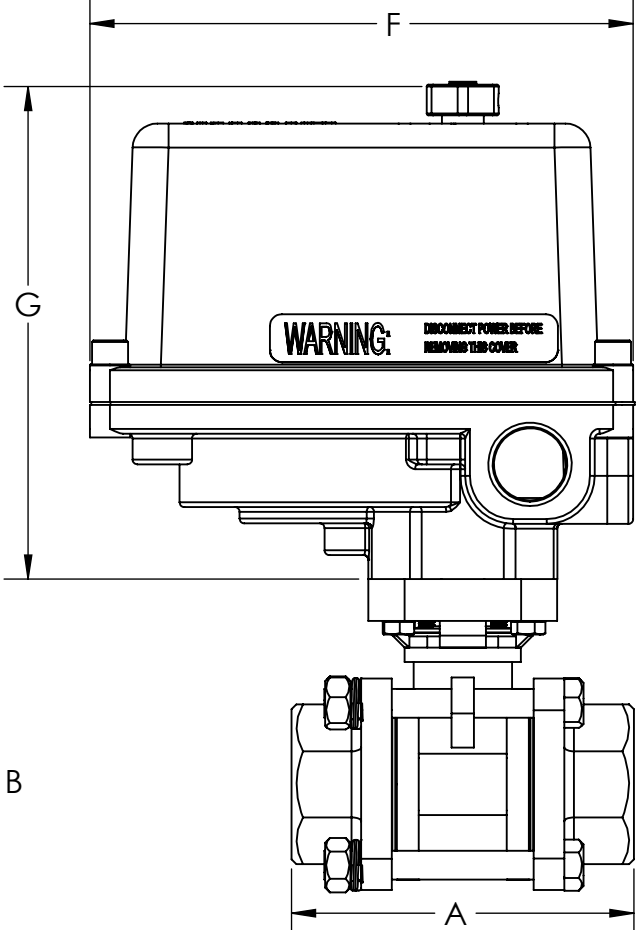


Model No. Voltage Code:
E3S2XAJEXXY


Code (Suffix)
Blank = 115VAC
B = 240VAC
H = 12-24 VAC/VDC (DE)

WARNING: DISCONNECT POWER BEFORE REMOVING TOP COVER

FOR APPLICATIONS EXCEEDING LISTED TEMPERATURES, CALL TO DISCUSS OPTIONS

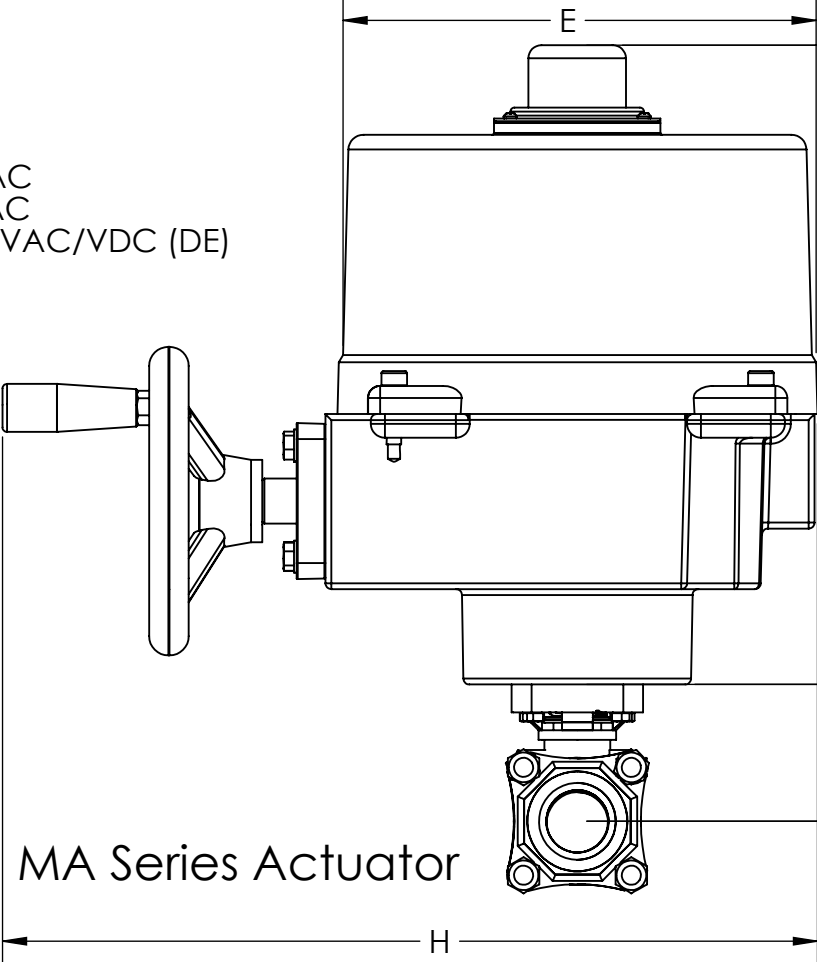

MA Series Actuator

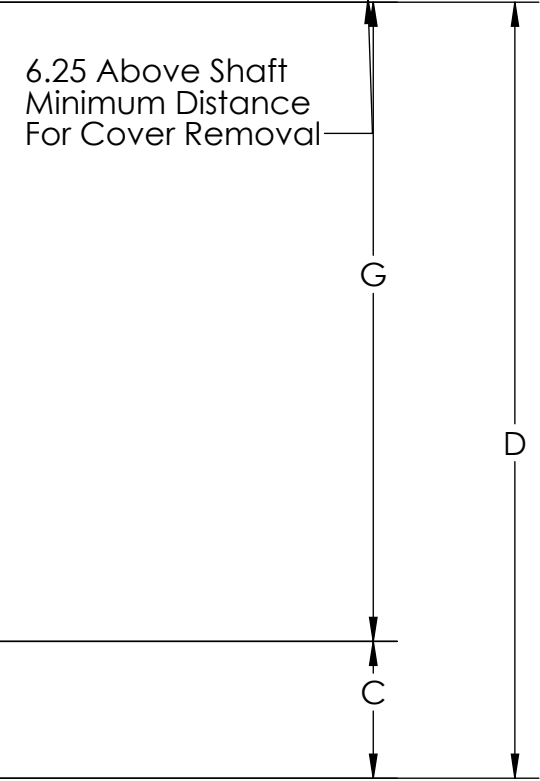

6.25 Above Shaft
Minimum Distance
For Cover Removal

Body/End Cap	ASTM A351-CF8M STAINLESS STEEL
Stem	ASTM A276-316 STAINLESS STEEL
Ball	CF8M SS
Seats	RTFE
Thrustwasher	PTFE

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO.		E3 Series				FILE NO. Sub306	
TITLE Ball Valve SS Full Port - NPT Electric Actuator							
DR MDC	DATE 12-07-22	CH'KD MWS	DATE 11-17-15	ENGR MWS	DATE 11-17-15		

