



MA Series Actuator

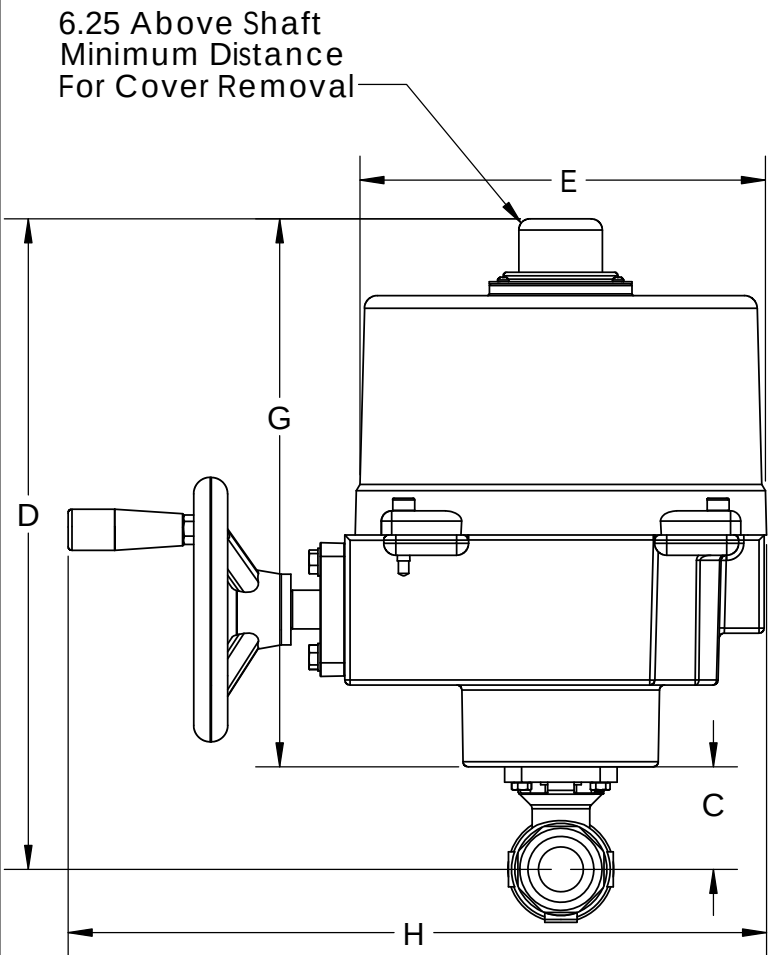

Model	EAS21ARE23	EAS22ARE23	EAS23ARE24	EAS24ARE24	EAS25ARE24	EAS26ARE07	EAS27ARE01	EAS38ARE01
Size	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT
Cv	5.3	8	19	35	50	110	180	210
WOG	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi
A	2.95	2.95	2.95	3.19	3.58	4.33	4.76	5.71
B	0.38	.38	.50	.69	.87	1.14	1.37	1.37
C	1.61	1.61	1.61	1.72	2.11	2.32	2.96	2.96
D	6.79	6.79	6.79	6.90	7.29	7.50	13.64	14.01
E	4.24	4.24	4.24	4.24	4.24	4.24	7.87	7.87
F	5.66	5.66	5.66	5.66	5.66	5.66	---	---
G	5.18	5.18	5.18	5.18	5.18	5.18	10.04	10.04
H	---	---	---	---	---	---	13.00	13.00
MAX Dif PSI	1500	1500	1500	1500	1500	1500	1500	1500
Actuator	DE156	DE156	DE304	DE304	DE304	MA4	MA7	MA7
Ambient Temp	-40° / 150°F	-40° / 150°F	-40° / 150°F	-40° / 150°F	-40° / 150°F	-40° / 150°F	-40° / 150°F	-40° / 150°F
Temp	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F
Wt. lbs	5.40	5.40	5.50	6.00	7.10	11.41	30.10	32.50

FOR APPLICATIONS EXCEEDING LISTED
TEMPERATURES, CALL TO DISCUSS OPTIONS

DE Series Actuator

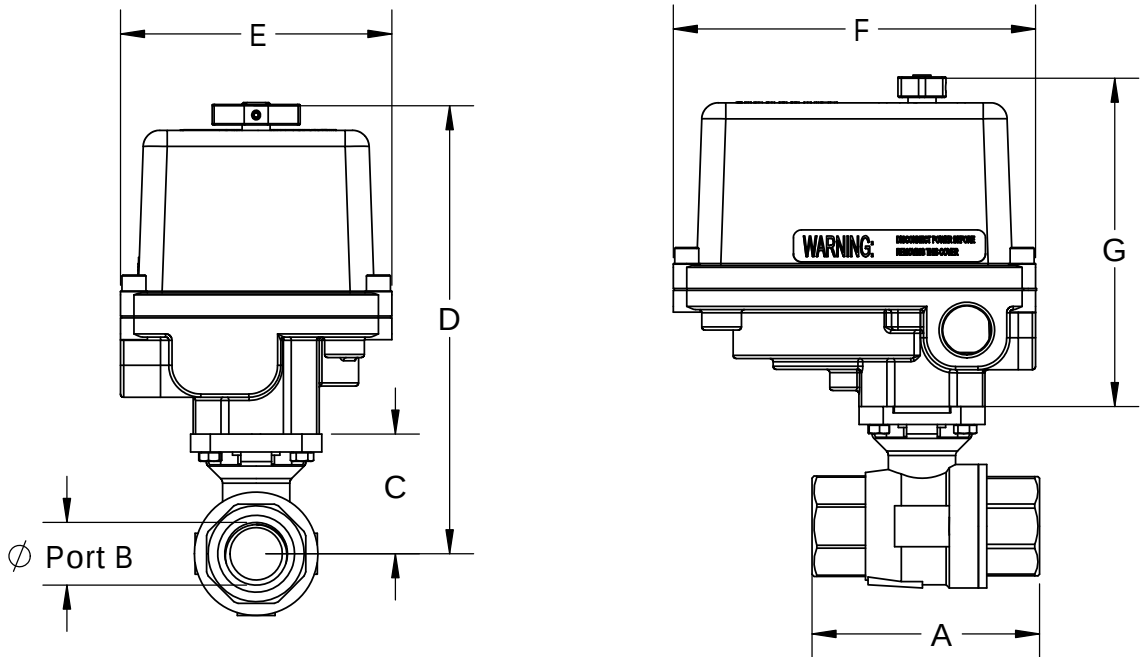

Model No. Voltage Code:
EAS2XAMEXXY
Code (Suffix)
Blank = 115VAC
B = 240VAC
H = 12-24 VAC/VDC (DE)

MODEL NUMBERS LISTED IN
CHART INDICATE SS BALL
VALVES - EAS...

FOR CARBON STEEL BALL
VALVES, MODEL NUMBERS
START - EAC...

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.

EA Series

FILE NO.
Sub448

TITLE

Ball Valve
Full Port - NPT
Electric Actuator

DR
CMM

DATE
06-15-23

CHKD

DATE

ENGR

DATE