



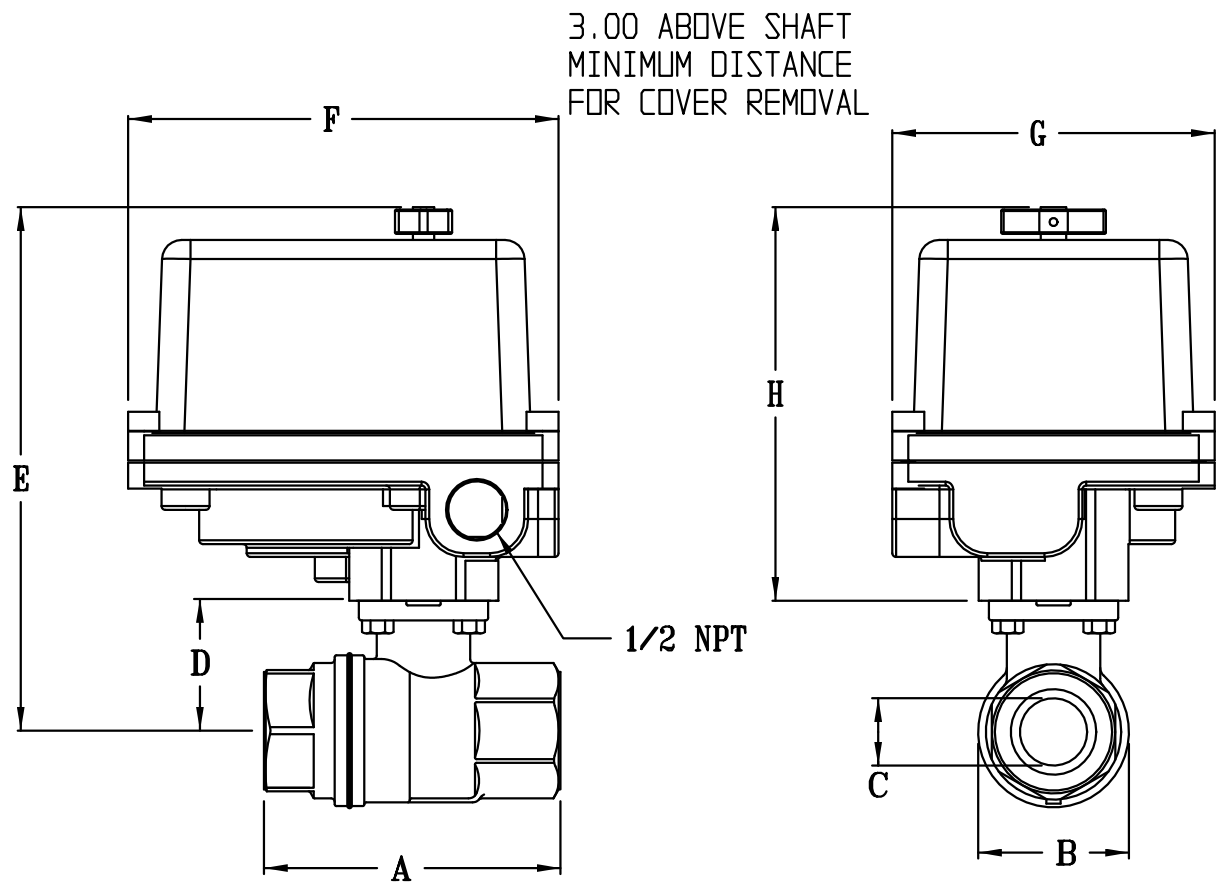

DE SERIES

MODEL	EHH23ATE20	EHH24ATE20	EHH25ATE20	EHH26ATE20	EHH27ATE25	EHH28ATE25	EHH2AATE07	EHH2BATE01
VALVE	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	3 NPT	4 NPT
C _v	19	34	52	77	143	205	780	1350
TEMP	-20°/370°F	-20°/370°F	-20°/370°F	-20°/370°F	-20°/370°F	-20°/370°F	-20°/370°F	-20°/370°F
CWP	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI
A	2.60	2.93	3.56	4.09	4.60	5.31	6.89	8.03
B	1.34	1.72	2.06	2.56	3.12	3.77	5.35	6.53
C	0.59	0.79	0.98	1.26	1.57	1.97	3.00	3.74
D	1.22	1.52	1.67	2.18	2.44	2.71	3.85	4.59
E	6.40	6.70	6.85	7.36	7.62	7.89	11.58	14.63
F	5.66	5.66	5.66	5.66	5.66	5.66	4.19	7.87
G	4.24	4.24	4.24	4.24	4.24	4.24	5.10	13.00
H	5.18	5.18	5.18	5.18	5.18	5.18	7.73	10.04
ACTUATOR	DE153	DE153	DE153	DE153	DE305	DE305	MA4	MA7
CYCLE	2.5 SEC.	2.5 SEC.	2.5 SEC.	2.5 SEC.	6.0 SEC.	6.0 SEC.	15 SEC.	15 SEC.
MAX△P	300 PSI	300 PSI	300 PSI	300 PSI	300 PSI	300 PSI	300 PSI	300 PSI
AMBIENT TEMP °F	-40° 150°F	-40° 150°F	-40° 150°F	-40° 150°F	-40° 150°F	-40° 150°F	10° 140° F	10° 140° F
WT. LBS	4.70	5.01	5.81	6.94	8.27	11.01	19.90	41.54

FOR USE WITH POTABLE WATER

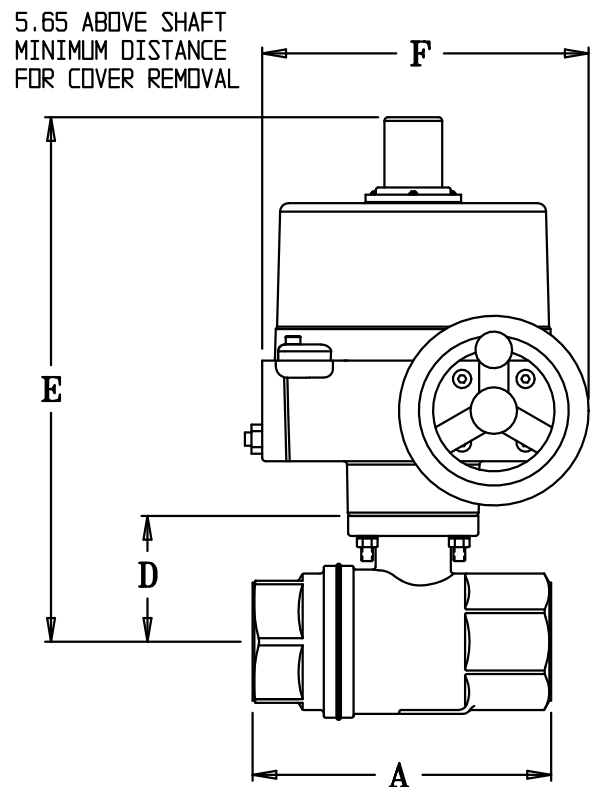

MA SERIES

VALVE SIZES 1/2 THROUGH 1 1/2 ARE CERTIFIED TO NSF/ANSI 372 FOR USE WITH POTABLE WATER

NOTE: SIZED FOR CLEAN WATER, AIR OR OIL. OTHER APPLICATIONS MAY REQUIRE LARGER ACTUATORS. PLEASE CONSULT FACTORY.

VALVE MATERIALS

BODY/END CAP	FORGED BRASS
STEM	NICKEL PLATED BRASS (2" STAINLESS STEEL)
BALL	CHROME PLATED BRASS
SEATS	RTFE
THRUSTWASHER	RTFE
STEM SEAL	VITON ORINGS

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. EHH2 SERIES

FILE NO. SUB123.1

TITLE
BALL VALVE
BRASS - FULL PORT - NPT
ELECTRIC ACTUATOR

DR	DATE	CH'KD	DATE	ENGR	DATE
MJP	01-29-21	MWS	06-25-14	MWS	06-25-14

