

VMH2 Series

For Commercial and General Industrial Applications

2-Piece Screwed Body Ball Valve

1/4" - 4" Full Port 600 PSI CWP
2 1/2" - 3" Std. Port 450 PSI CWP


VMH2 Series ball valves offer maximum strength, durability, and maintenance-free operation all in one package! Industrial two-piece, forged brass valves are precision machined and designed to outlast lightweight imports. Available in female x female or male x female threading. Operating temperature range: -20° to 370° F.

Options:

Latching Lockout Handle Kit (OP)
"Gull Wing" Tee Handle (OE)

Similar valve is automated on pages 2 and 3.

Full Port
1/4"-4"
Standard Port
2 1/2"-3"

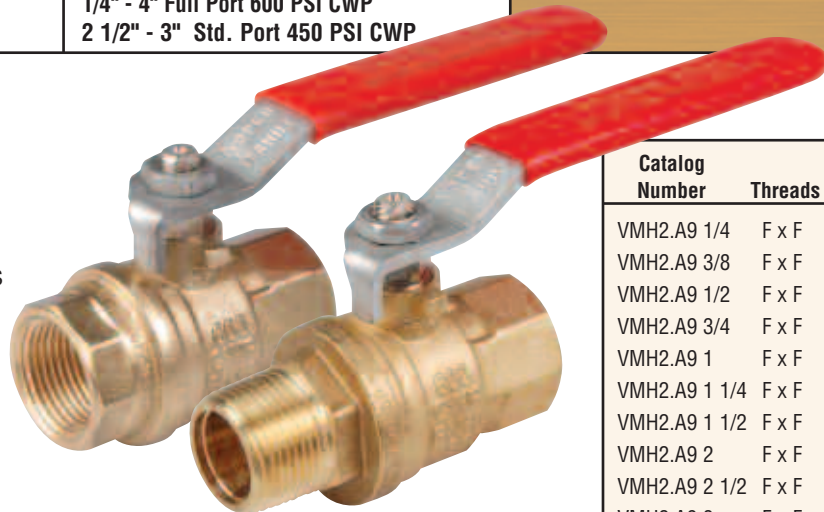

Catalog Number	Threads	Port	PSI CWP
VMH2.A9 1/4	F x F	FULL	600
VMH2.A9 3/8	F x F	FULL	600
VMH2.A9 1/2	F x F	FULL	600
VMH2.A9 3/4	F x F	FULL	600
VMH2.A9 1	F x F	FULL	600
VMH2.A9 1 1/4	F x F	FULL	600
VMH2.A9 1 1/2	F x F	FULL	600
VMH2.A9 2	F x F	FULL	600
VMH2.A9 2 1/2	F x F	FULL	600
VMH2.A9 3	F x F	FULL	600
VMH2.A9 4	F x F	FULL	600
VMH1.A9 2 1/2	F x F	STANDARD	450
VMH1.A9 3	F x F	STANDARD	450
VMH2.P9 1/4	M x F	FULL	600
VMH2.P9 3/8	M x F	FULL	600
VMH2.P9 1/2	M x F	FULL	600
VMH2.P9 3/4	M x F	FULL	600
VMH2.P9 1	M x F	FULL	600

- Two-Piece Forged Brass
- Blowout-Proof Stem Design with Adjustable Packing
- Reinforced PTFE Seats and Seals
- Corrosion-Resistant Handle
- Approvals Include: UL® for LP Gas, AGA® and CGA® for Natural Gas, Factory Mutual for Fire Protection
- 4:1 Pressure Safety Factor (Full Port)
- 3:1 Pressure Safety Factor (Std. Port)

VMH2 Exhaust Series

For Compressed Air Service - Lockout/Tagout


2-Piece Safety Exhaust Valve

200 PSI CWP

VMH2 Exhaust Series ball valves automatically vent residual air on the downstream side when closed. Tamper-resistant lockout/tagout design for additional safety. Threaded exhaust port for mounting mufflers. Heavy-duty forged brass, blowout-proof stem, and orange safety handle for additional safety and durability. Operating temperature range: 40° to 140° F.

Full Port
1/4"-1"

- Two-Piece Forged Brass
- Reinforced PTFE Seats and Seals
- Meets OSHA Req. 1910.147 for Energy Isolating and Lockout Devices

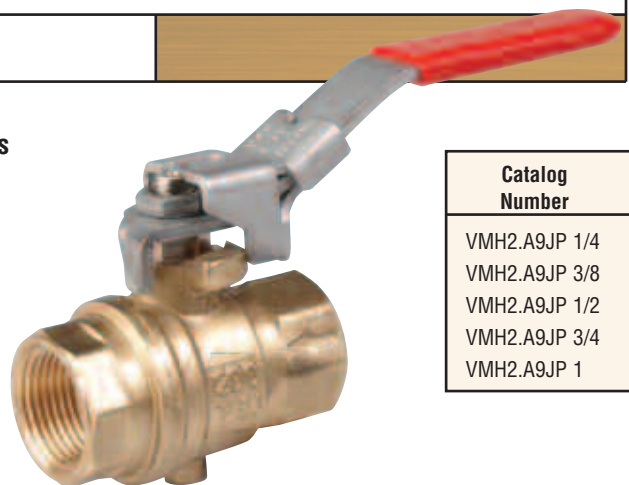

Catalog Number
VMH2.A9JP 1/4
VMH2.A9JP 3/8
VMH2.A9JP 1/2
VMH2.A9JP 3/4
VMH2.A9JP 1