



5/2 WAY 1/4 NPT
SINGLE SOLENOID
5 PORT - 2 POSITION
NAMUR MOUNTING

PRESSURE: 22 - 116 PSI
TEMP: 23 - 140°F

1/4 NPT
INLET & EXHAUST
PORTS

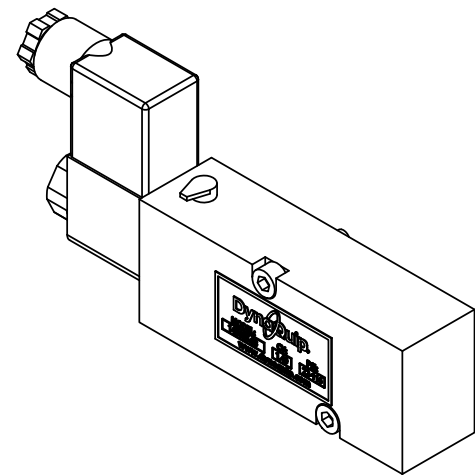

CABLE CONNECTOR STANDARD	CONDUIT CONNECTOR	
145855.06	145855.Y6	220 VAC 50/60 Hz
145855.04	145855.Y4	12 VDC
145855.03	145855.Y3	24 VDC
145855.02	145855.Y2	24 VAC 50/60 Hz
145885.01	145855.Y1	110 VAC 50/60 Hz
PART NO.	PART NO.	VOLTAGE

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. 145855 SERIES

FILE NO.
SUB378

TITLE
SOLENOID VALVE

DR	DATE	CHKD	DATE	ENGR	DATE
MJP	12-13-24	MJP	05-02-16	MJP	05-02-16

