



Model	E2S21AJE23	E2S22AJE23	E2S23AJE23	E2S24AJE23	E2S25AJE21	E2S26AJE21	E2S27AJE25	E2S28AJE07	E2S29AJE01	E2S2AAJE02
Size	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	2 1/2 NPT	3 NPT
Cv	10	16	37	68	109	185	268	486	791	1150
WOG	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi	1000 psi
A	2.95	2.95	2.95	3.15	3.56	4.33	4.72	4.88	5.76	6.44
B	0.31	0.39	0.59	0.79	0.98	1.26	1.50	1.97	2.48	2.99
C	1.54	1.54	1.54	1.73	1.87	2.09	2.54	2.97	3.60	3.97
D	6.72	6.72	6.72	6.91	7.05	7.27	7.72	10.70	13.64	14.01
E	4.24	4.24	4.24	4.24	4.24	4.24	4.24	5.10	7.87	7.87
F	5.66	5.66	5.66	5.66	5.66	5.66	5.66	---	---	---
G	5.18	5.18	5.18	5.18	5.18	5.18	5.18	7.73	10.04	10.04
H	---	---	---	---	---	---	---	---	13.00	13.00
Actuator	DE156	DE156	DE156	DE156	DE154	DE154	DE305	MA4	MA7	MA13
Wt. lbs	5.10	5.10	5.10	5.30	6.20	7.30	9.10	13.01	35.20	37.90
Sized for Max. Δ PSI	500 psi	500 psi	500 psi	500 psi	500 psi	300 psi	300 psi	300 psi	300 psi	300 psi
Media Temp	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F	-4° / 200°F
Ambient Temp	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 150°F	-4° / 149°F	-4° / 149°F	-4° / 149°F

FOR APPLICATIONS EXCEEDING LISTED TEMPERATURES, CALL TO DISCUSS OPTIONS

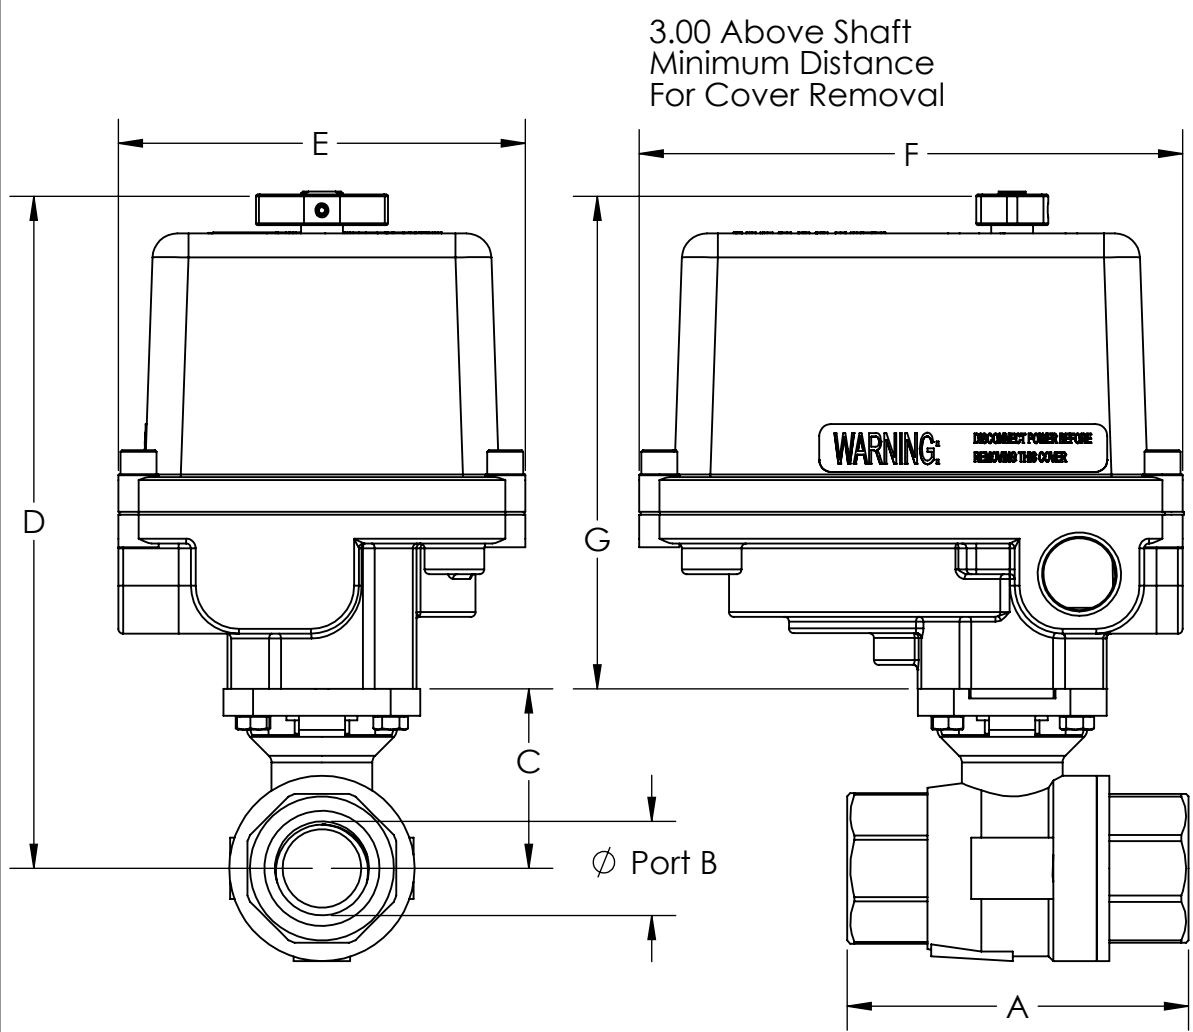

Model No. Voltage Code:
E3S2XAJEXXY

Code (Suffix)
Blank = 115VAC
B = 240VAC
H = 12-24 VAC/VDC (DE)

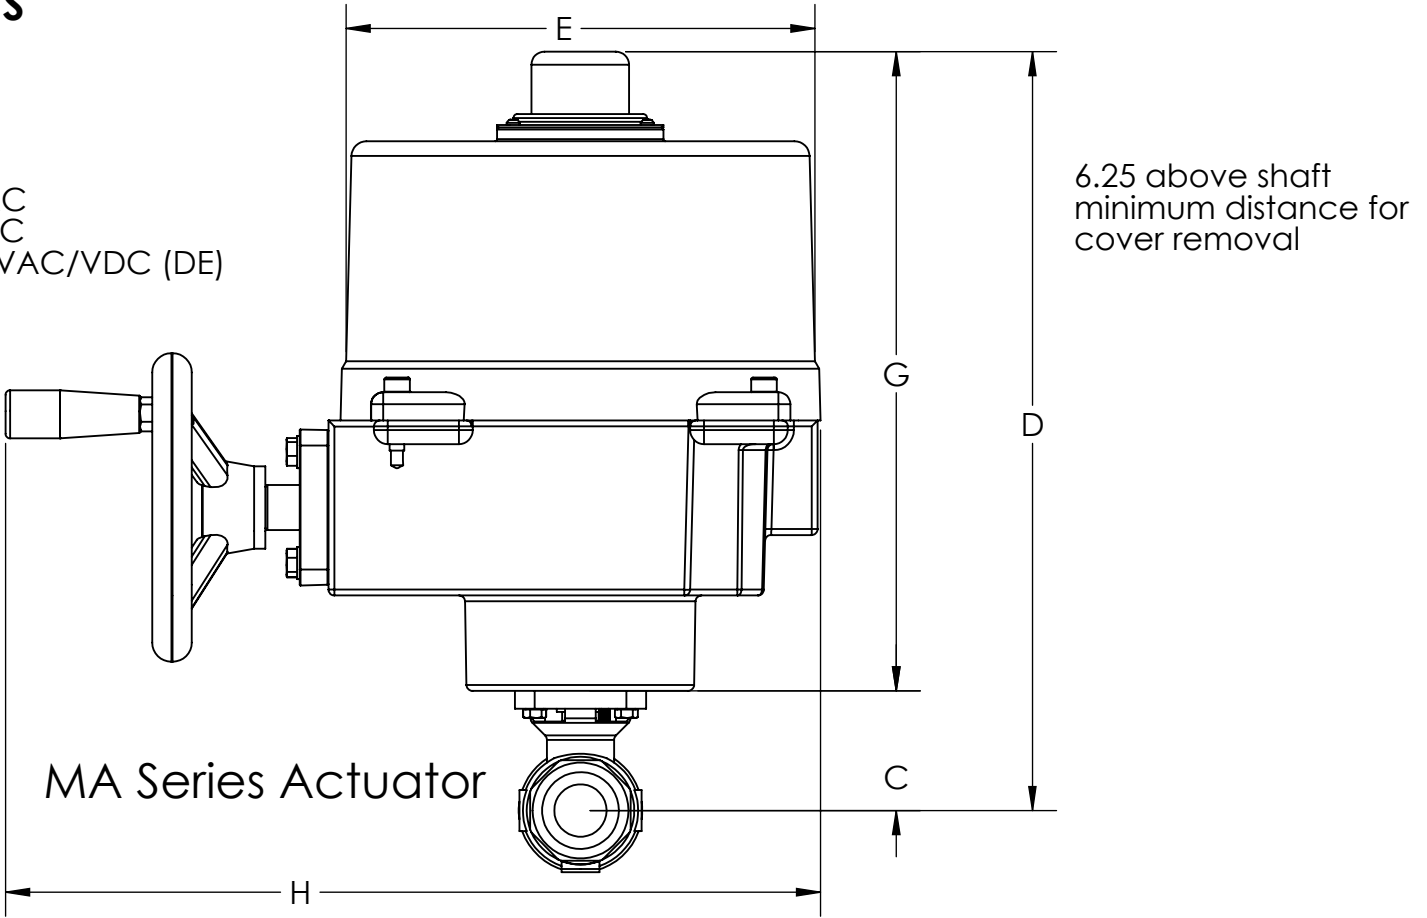

VALVE MATERIALS

Body/End Cap	ASTM 216-WCB CARBON STEEL
Stem	ASTM A276-316 STAINLESS STEEL
Ball	CF8M SS
Seats	RTFE
Thrustwasher	PTFE

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.

E2 Series

FILE NO.
Sub320

TITLE

Ball Valve SS
Full Port - NPT
Electric Actuator

DR
CMM

DATE
08-03-18

CH'KD
MWS

DATE
11-10-15

ENGR
MWS

DATE
11-10-15