



Model	E5S23EJE20	E5S24EJE20	E5S25EJE21	E5S26EJE26	E5S27EJE07	E5S28EJE01	E5S29EJE01	E5S2AEJE02	E5S2BEJE13
Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Temp	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F	-4° / 392°F
CWP	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi
A	4.25	4.663	5.00	5.50	6.50	7.00	7.50	8.00	9.00
B	0.59	0.79	0.94	1.18	1.50	1.97	2.52	2.99	3.94
C	2.03	2.17	2.28	2.44	2.99	3.33	4.11	4.39	5.33
D	6.38	6.52	6.63	7.44	10.72	13.37	14.15	14.43	17.22
E	3.58	3.58	3.58	3.58	4.49	7.87	7.87	7.87	7.87
F	4.75	4.75	4.75	4.75	---	---	---	---	---
G	4.35	4.35	4.35	5.00	7.73	10.04	10.04	10.04	11.89
H	---	---	---	---	---	13.00	13.00	13.00	13.0
J	3.5	3.88	4.25	4.62	5.00	6.00	7.00	7.50	8.00
Actuator	DE153	DE153	DE156	DE304	MA4	MA7	MA7	MA13	MA20
Wt. lbs	7.40	8.30	10.80	12.10	19.81	37.60	52.00	60.20	80.90
Sized for Max. Δ PSI	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi

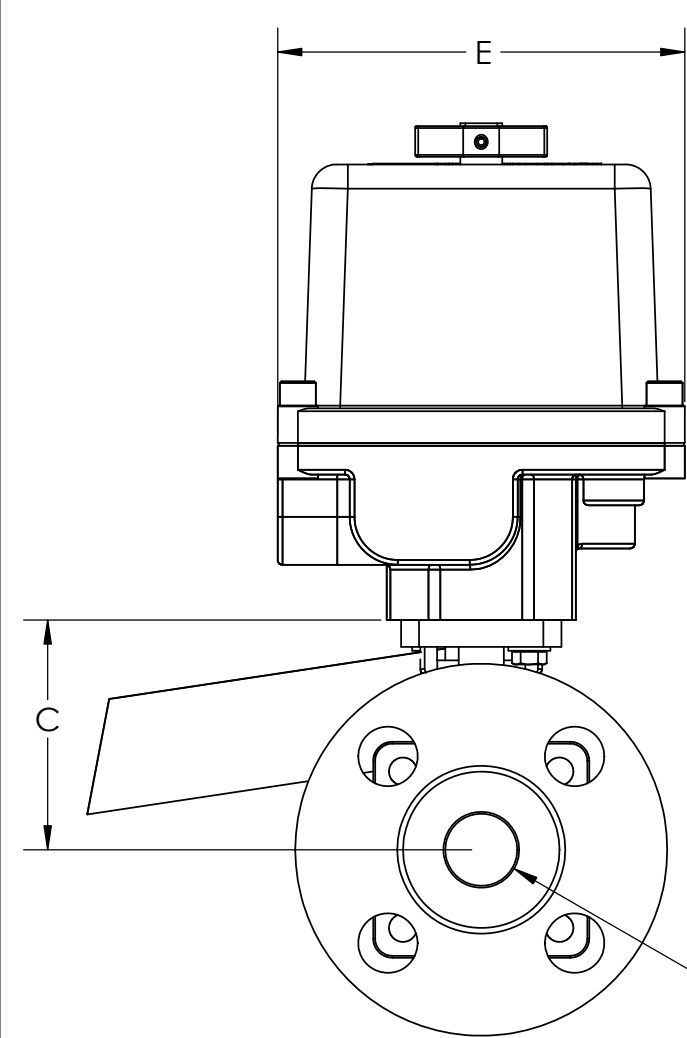

3.00 ABOVE SHAFT
MINIMUM DISTANCE
FOR COVER REMOVAL


DE Series Actuator

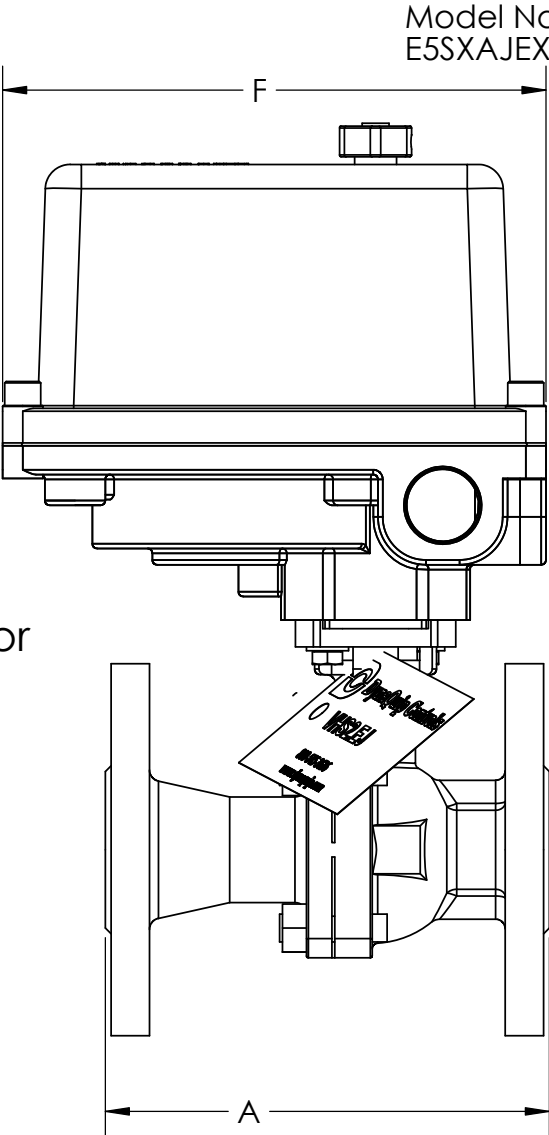

Model No. Voltage Code:
E5SXAJEXXY

Code (Suffix)
Blank = 115VAC
B = 240VAC
H = 12-24 VAC/VDC (DE)

MA Series Actuator

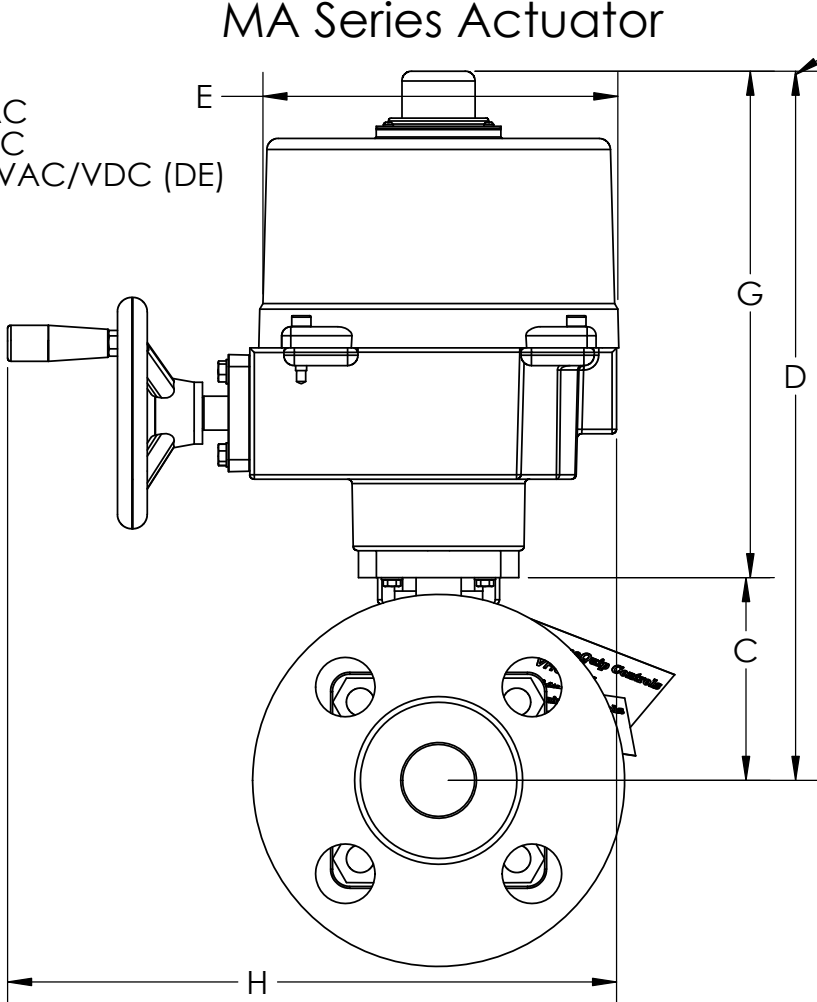

6.25 Above Shaft
Minimum Distance
For Cover Removal

VALVE DATA

Body / End Cap	ASTM A351-CF8M (316 Stainless)
Stem	316 Stainless Steel
Ball	316 Stainless Steel
Seats	RTFE
Thrust Washer	PTFE
Stem Seal	PTFE / VITON O-RING

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. E5 Series FILE NO. Sub342

TITLE Ball Valve SS
Full Port - # 150 Flange
Electric Actuator

DR	DATE	CHKD	DATE	ENGR	DATE
MJP	04.23-21	MWS	11-17-15	MWS	11-17-15

