




Model	EHH23ATE20	EHH24ATE20	EHH25ATE20	EHH26ATE20	EHH27ATE25	EHH28ATE25	EHH2AATE07	EHH2BATE01
Size	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	3 NPT	4 NPT
Cv	19	34	52	77	143	205	780	1350
CWP	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI	600 PSI
A	2.60	2.93	3.56	4.09	4.60	5.31	6.89	8.03
B	1.34	1.72	2.06	2.56	3.12	3.77	5.35	6.53
C	0.59	0.79	0.98	1.26	1.57	1.97	3.00	3.74
D	1.22	1.52	1.67	2.18	2.44	2.71	3.85	4.59
E	6.40	6.70	6.85	7.36	7.62	7.89	11.58	14.63
F	5.66	5.66	5.66	5.66	5.66	5.66	4.19	7.87
G	4.24	4.24	4.24	4.24	4.24	4.24	5.10	13.00
H	5.18	5.18	5.18	5.18	5.18	5.18	7.73	10.04
Actuator	DE153	DE153	DE153	DE153	DE305	DE305	MA4	MA7
CYCLE TIME	2.5 SEC	2.5 SEC	2.5 SEC	2.5 SEC	6.0 SEC	6.0 SEC	15 SEC	15 SEC
Wt. lbs	4.70	5.01	5.81	6.94	8.27	11.01	19.90	41.54
Sized for Max. Δ PSI	300 PSI	300 PSI	300 PSI	300 PSI	300 PSI	300 psi	300 psi	300 psi
Media Temp	-4F/200F	-4F/200F	-4F/200F	-4F/200F	-4F/200F	-4F/200F	-4F/200F	-4F/200F
Ambient Temp	-4F/150F	-4F/150F	-4F/150F	-4F/150F	-4F/150F	-4F/150F	-4F/150F	-4F/150F

VALVE SIZES 1/2 THORUGH 1 1/2
ARE CERTIFIED TO NSF/ ANSI 372
FOR USE WITH POTABLE WATER

VALVE MATERIALS

BODY/ END CAP	FORGED BRASS
STEM	NICKEL PLATED BRASS (2" STAINLESS STEEL)
BALL	CHROME PLATED BRASS
SEATS	RTFE
THRUSTWASHER	RTFE
STEM SEAL	VITON O-RINGS

FOR APPLICATIONS EXCEEDING LISTED TEMPERATURES, CALL TO DISCUSS OPTIONS

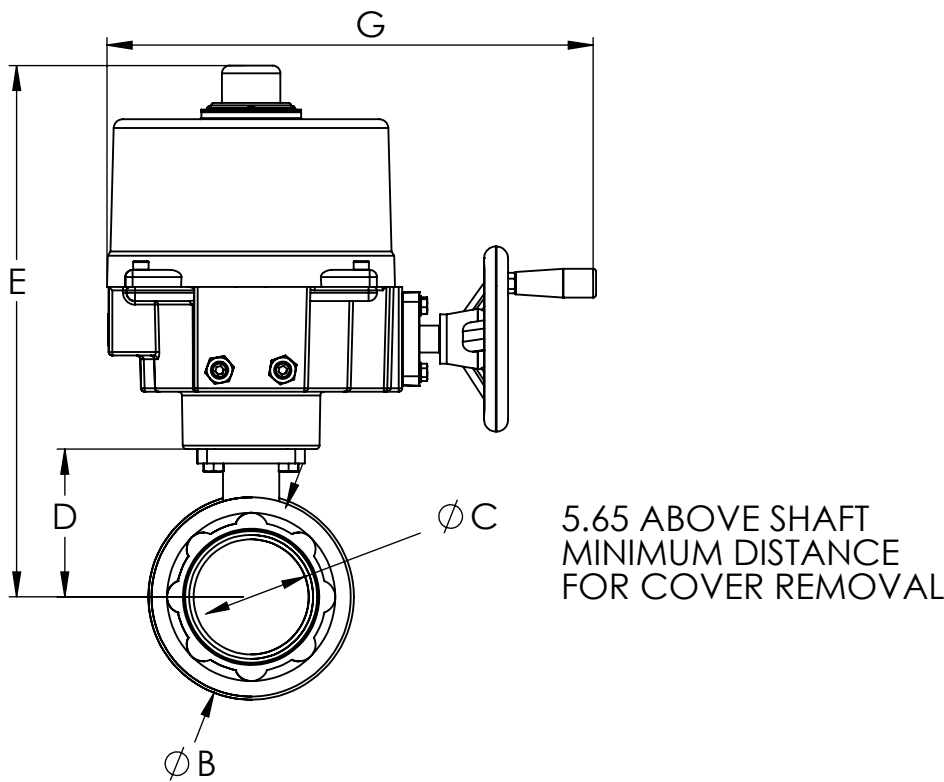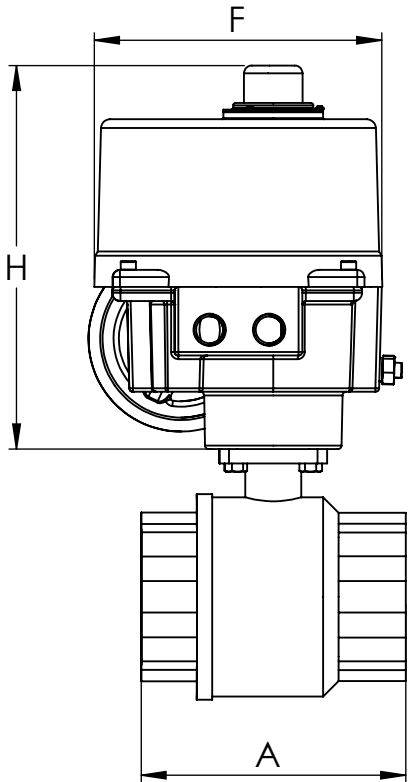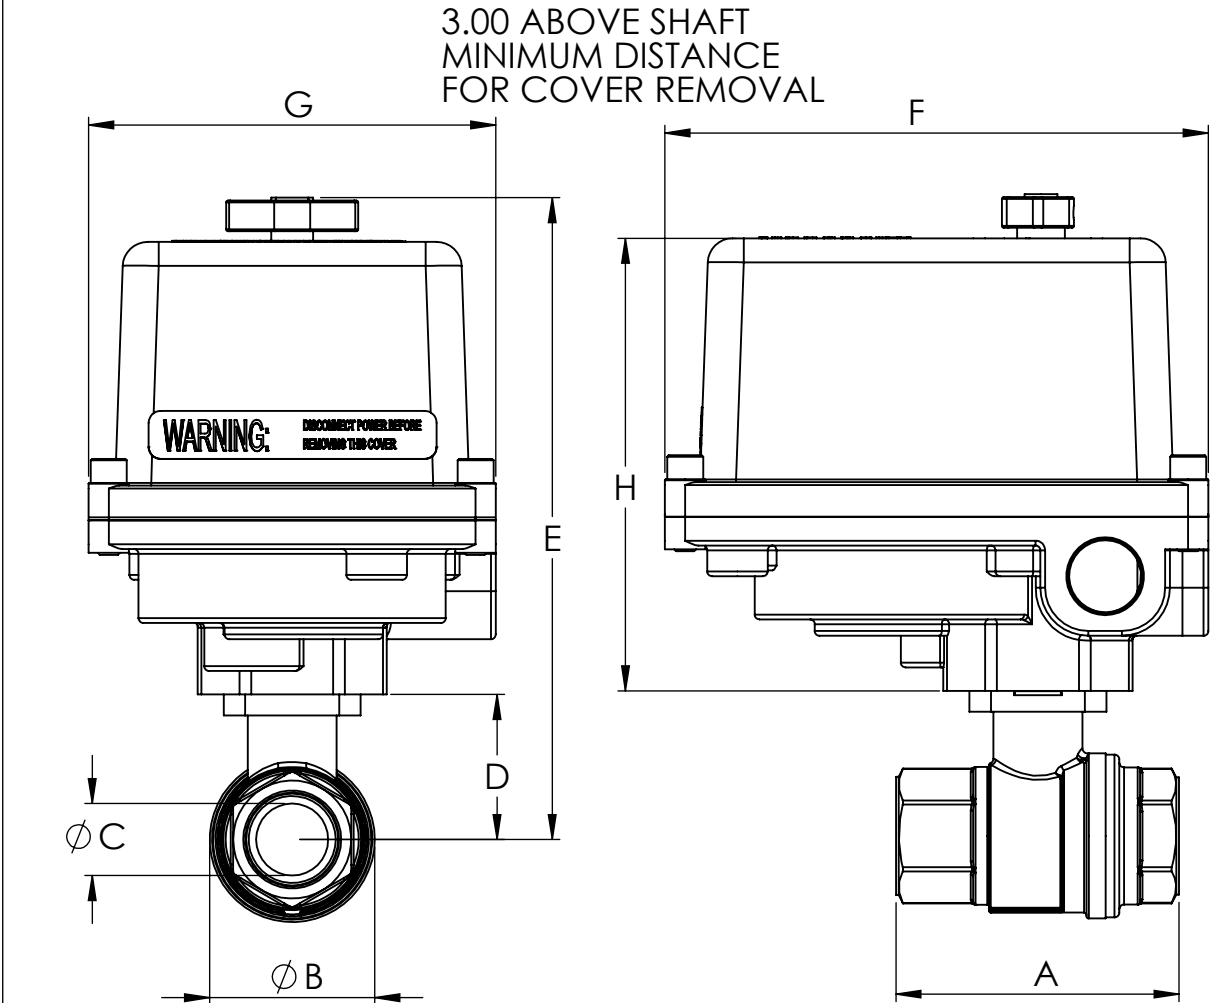

NOTE: SIZED FOR CLEAN WATER,
AIR, OR OIL. OTHER APPLICATIONS
MAY REQUIRE LARGER ACTUATORS
PLEASE CONSULT DYNAQUIP.

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED,LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. EHH2 SERIES

FILE NO.
SUB123

TITLE
BALL VALVE
BRASS - FULL PORT - NPT
ELECTRIC ACTUATOR

DR	DATE	CH'KD	DATE	ENGR	DATE
MDC	12-05-22	MDC	12-05-22	MDC	12-05-22

DynaQuip®
CONTROLS CORPORATION