


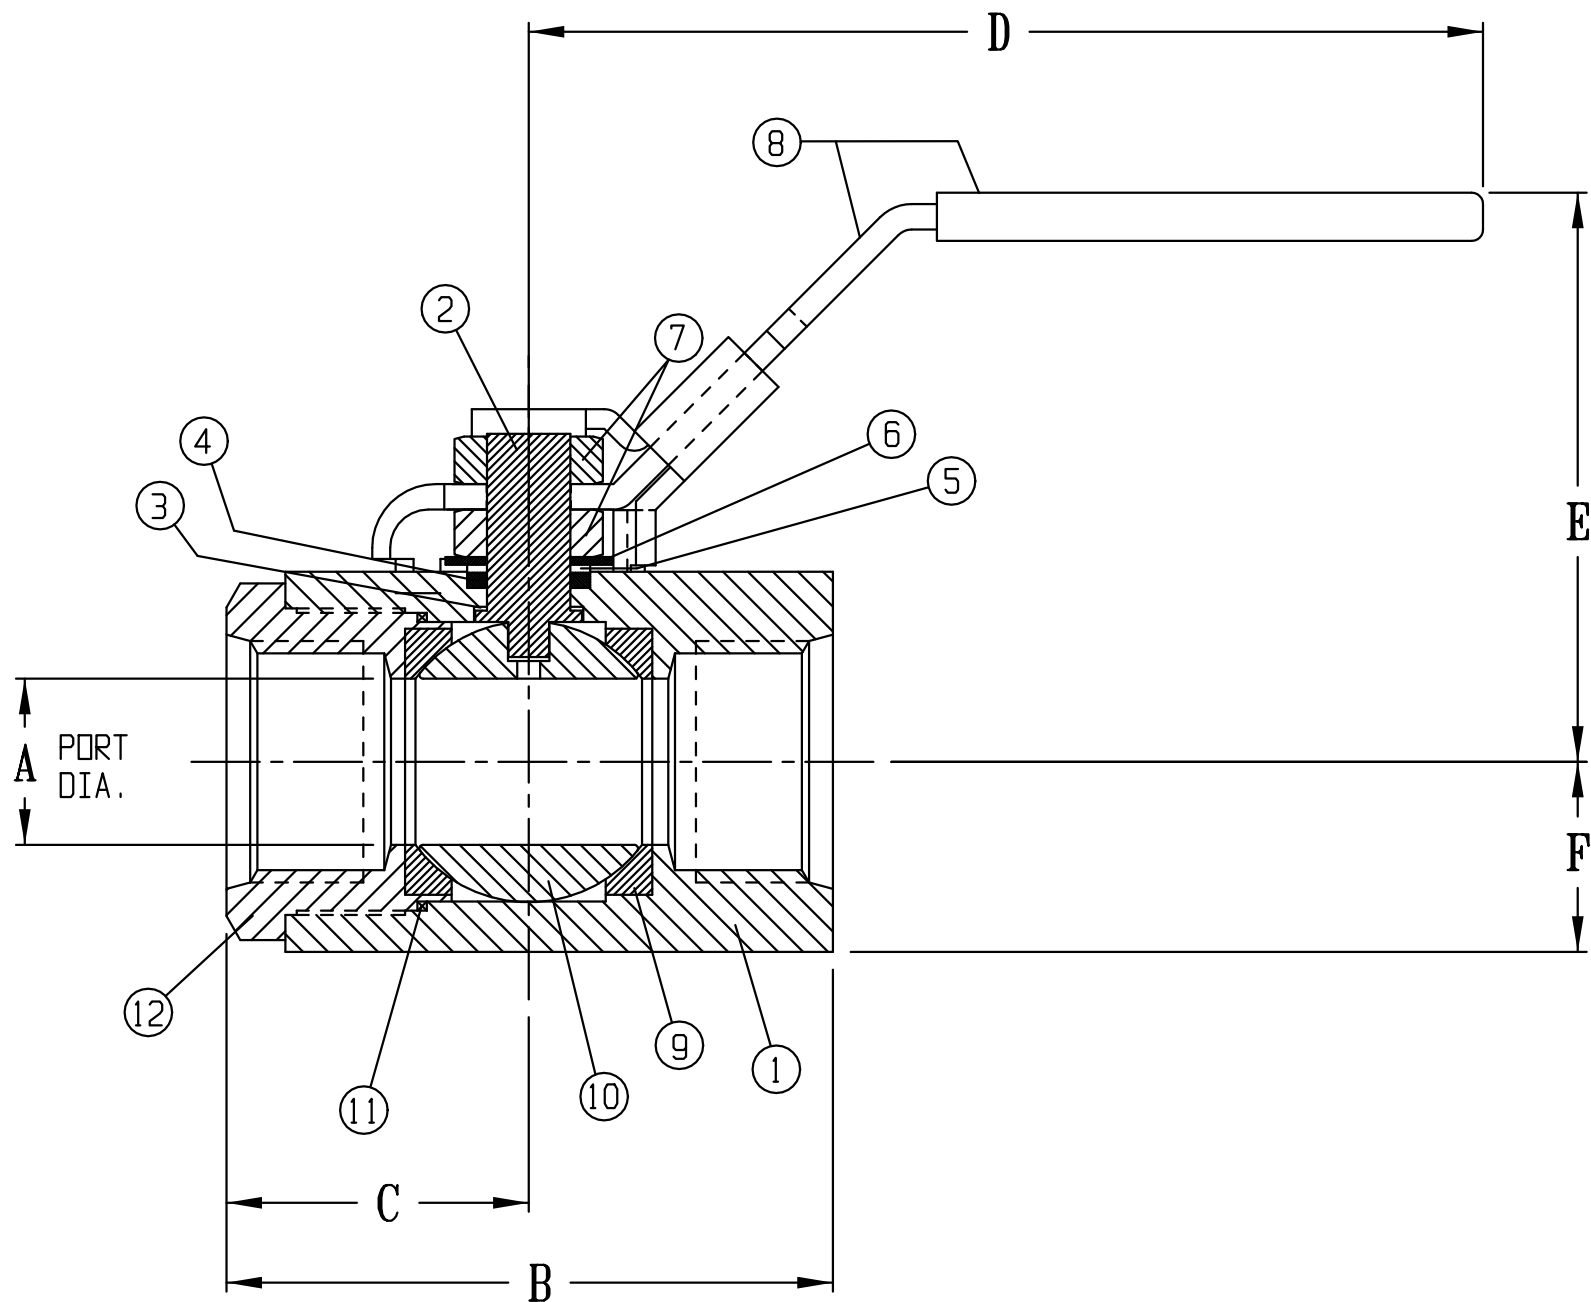

CATALOG NO.	DIMENSIONS						THREAD SAE J1926	PRESSURE RATING	C _V	WT. LBS.
	A	B	C	D	E	F				
VLE2.NK 1/4	.40	2.01	1.00	4.18	2.14	.53	-4 SAE 7/16-20UNF	3000 CWP 150 SWP	6	.6
VLE2.NK 3/8	.40	2.01	1.00	4.18	2.14	.53	-6 SAE 9/16-18UNF	3000 CWP 150 SWP	12	.6
VLE2.NK 1/2	.50	2.84	1.52	4.75	2.55	.81	-8 SAE 3/4-16UNF	3000 CWP 150 SWP	19	1.5
VLE2.NK 3/4	.75	3.71	2.05	5.33	2.82	.94	-12 SAE 1 1/16-12UN	3000 CWP 150 SWP	34	2.4
VLE2.NK 1	1.00	4.15	2.27	6.20	3.56	1.25	-16 SAE 1 5/16-12UN	3000 CWP 150 SWP	54	5.3

12	END CAP	STEEL 1018, ZINC PHOS COAT
11	END CAP SEAL	PTFE
10	BALL	STEEL C12L14, CHROME PLT.
9	BALL SEAT	CARBON/GLASS FILLED PTFE
8	HANDLE COVER	VINYL
8	HANDLE	STEEL, ZINC PLATE
7	NUT	STEEL, ZINC PLATE
6	SPRING WASHER	STEEL, ZINC PLATE
5	FOLLOWER	STAINLESS STEEL, 304
4	STEM SEAL	CARBON/GRAPHITE FILLED PTFE
3	THRUSTWASHER	CARBON/GRAPHITE FILLED PTFE
2	STEM	STEEL C12L14, NICKEL PLT.
1	BODY	STEEL 1018, ZINC PHOS COAT
ITEM	PART NAME	MATERIAL

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. VLE2.NKOP

FILE NO. SUB238

TITLE

BALL VALVE - VLE SERIES
SAE O-RING BOSS - LOCK HANDLE

DR	DATE	CH'KD	DATE	ENGR	DATE
MJP	09-07-11	MJP	09-07-11	MJP	09-07-11