


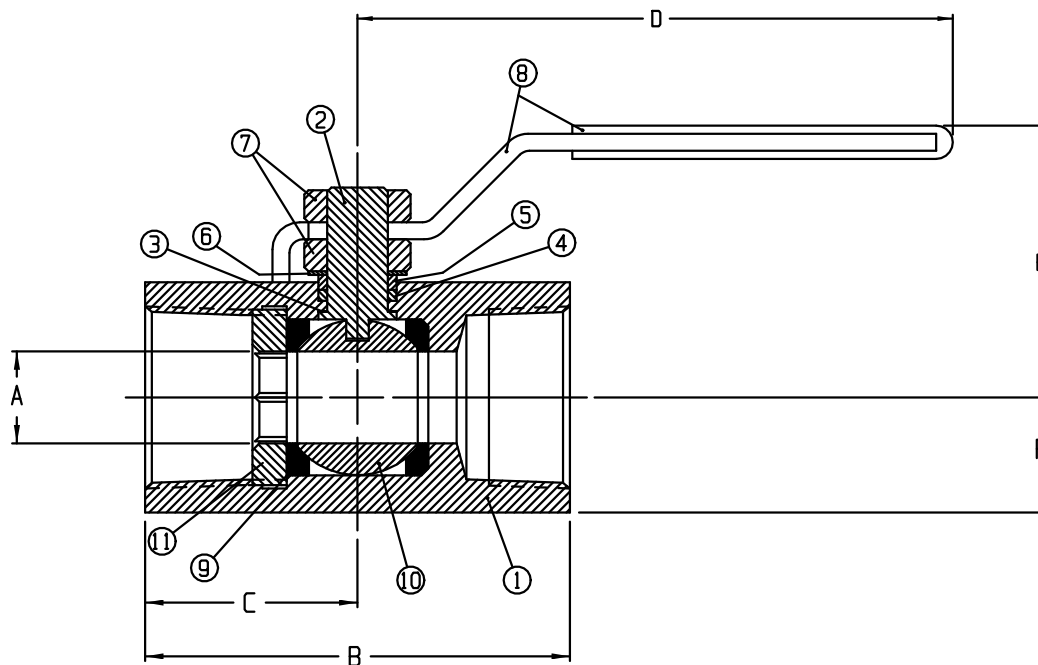

FEDERAL SPECIFICATION; WW-V-35C,
TYPE II
COMPOSITION, CS
STYLE 3

CATALOG NO.	DIMENSIONS						PRESSURE RATING	C _V	WT. LBS.
	A	B	C	D	E	F			
VME3-A9 1/2	.40	2.19	1.13	3.78	1.63	.53	2000 CWP 150 SWP	7	.5
VME3-A9 3/4	.54	2.62	1.31	3.78	1.73	.63	2000 CWP 150 SWP	12	.8
VME3-A9 1	.68	3.12	1.60	5.10	2.08	.81	2000 CWP 150 SWP	25	1.4
VME3-A9 1 1/4	.88	3.63	1.86	5.10	2.30	1.00	2000 CWP 150 SWP	38	2.4

11	SEAT RETAINER	STEEL C1215, ZINC PHOS COAT
10	BALL	STEEL C12L14, CHROME PLT.
9	BALL SEAT	REINFORCED PTFE
8	HANDLE COVER	VINYL
8	HANDLE	STEEL, ZINC PLATE
7	NUT	STEEL, ZINC PLATE
6	SPRING WASHER	STEEL, ZINC PLATE
5	FOLLOWER	STAINLESS STEEL, 304
4	STEM SEAL	REINFORCED PTFE
3	THRUSTWASHER	REINFORCED PTFE
2	STEM	STEEL C12L14, NICKEL PLT.
1	BODY	STEEL C1215, ZINC PHOS COAT
ITEM	PART NAME	MATERIAL

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.		VME3-A9			FILE NO.
TITLE		BALL VALVE - VME SERIES BAR STOCK - NPT THREADS			
DR	DATE	CHK'D	DATE	ENGR	DATE
MWS	05-12-14	MWS	05-12-14	MWS	05-12-14