




CLOSED POSITION

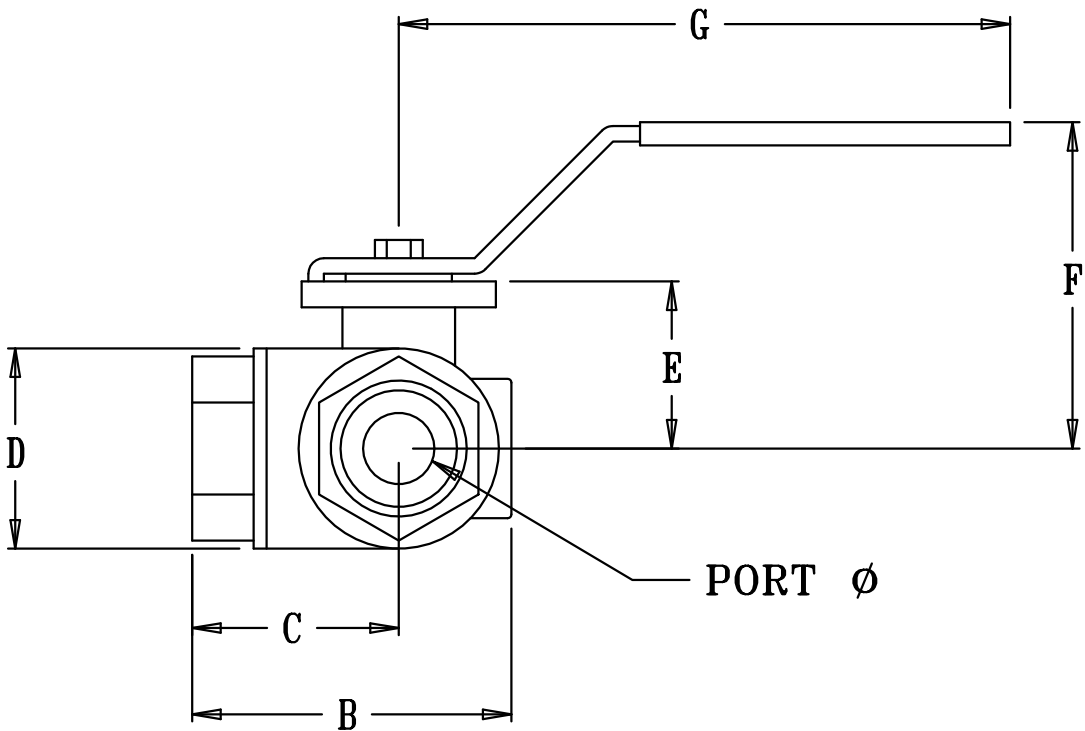

OPEN POSITION

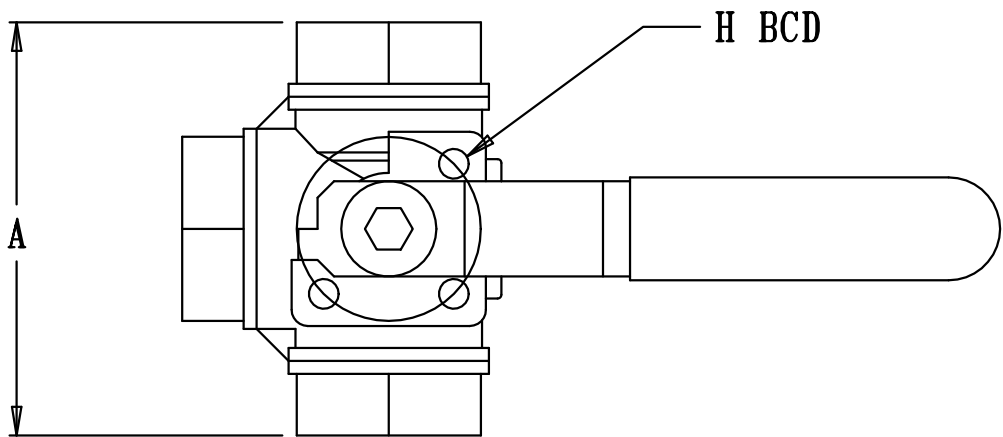

PORT ϕ

MODEL	PORT ϕ	A	B	C	D	E	F	G	H	Cv	Wt. lb
VYHA .AU 1/4	0.39	2.64	2.09	1.32	1.34	1.20	2.44	4.72	1.42	3.26	1.22
VYHA .AU 3/8	0.43	2.64	2.09	1.32	1.34	1.20	2.44	4.72	1.42	3.50	1.16
VYHG .AU 1/2	0.43	2.87	2.21	1.44	1.34	1.20	2.44	4.72	1.42	4.20	1.21
VYHG .AU 3/4	0.59	3.19	2.47	1.60	1.53	1.29	2.52	4.72	1.42	7.00	1.47
VYHG .AU 1	0.79	3.74	2.87	1.87	1.89	1.63	2.95	6.69	1.97	12.83	2.64
VYHG .AU 1 1/4	0.98	4.39	3.42	2.20	2.36	1.85	3.17	6.69	1.97	18.67	4.15
VYHG .AU 1 1/2	1.26	4.86	4.22	2.43	2.83	2.34	3.66	6.69	1.97	29.75	6.02
VYHG .AU 2	1.57	5.73	4.62	2.87	3.38	2.90	4.43	9.05	2.76	43.76	9.30
VYHG .AU 2 1/2	1.95	6.93	5.67	3.47	4.37	3.35	4.86	9.05	2.76	70.00	16.33
VYHG .AU 3	1.95	7.08	5.74	3.54	4.45	3.35	4.86	9.05	2.76	70.00	19.55

BRASS BALL VALVE
3-WAY L-PORT
ISO MOUNTING PAD
PRESSURE RATING: 400 CWP - 100 WSP

VALVE DATA	
BODY	BRASS
STEM	BRASS, NI PL
BALL	BRASS, NI-CHROME PL
SEAT/SEAL	PTFE / VITON O-RING
THRUSTWASHER	PTFE
STEM SEAL	VITON O-RING
HANDLE	STEEL

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. VYHG SERIES
FILE NO. SUB 177

TITLE
BALL VALVE
3-WAY L-PORT
NPT BRASS

DR	DATE	CH' KD	DATE	ENGR	DATE
MJP	03-23-09				

