



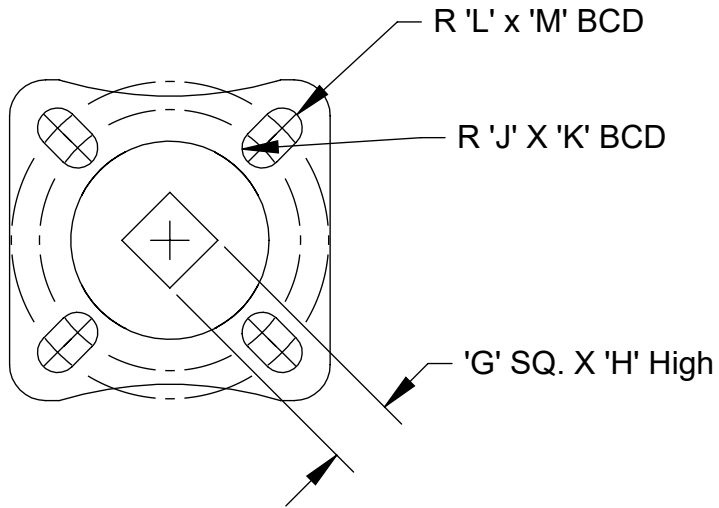

Valve Data	
Body & Cap	316 SS
Ball	316 SS
Stem	316 SS
Seats	RTFE
Seals / O Ring	GRAPHITE / VITON

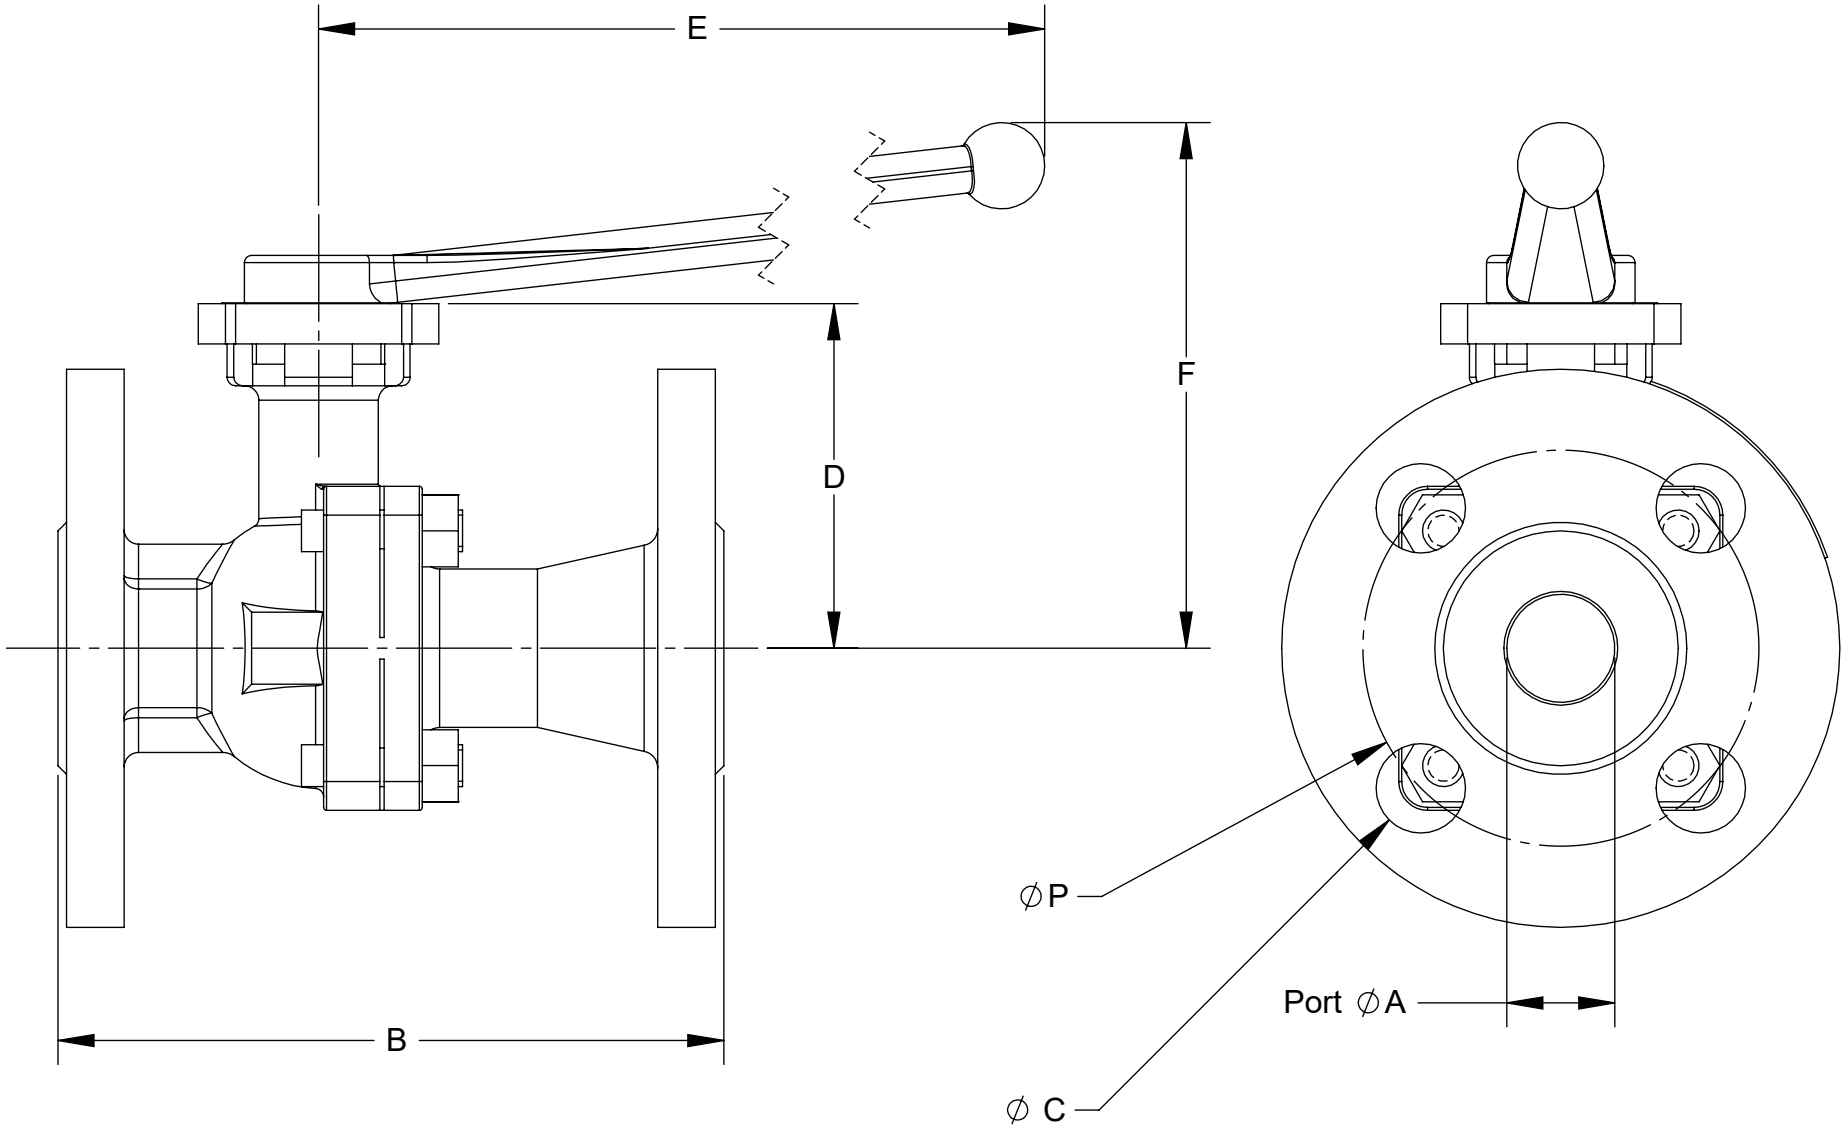

1/2" - 3" = 4 BOLT HOLES PER FLANGE
4" = 8 BOLT HOLES PER FLANGE

Model No .	Dimensions								Mounting Holes				TEMP	WOG	Cv	Weight	BCD
	A	B	C	D	E	F	G	H	J	K	L	M	°F	PSI		lbs	Ø P
V5S2.EJ 1/2	0.59	4.25	0.63	1.99	7.48	3.35	.354	0.33	0.11	1.417	0.11	1.654	-4 / 392	235	37	3.7	2.38
V5S2.EJ 3/4	0.79	4.61	0.63	2.17	7.48	3.52	.354	0.33	0.11	1.417	0.11	1.654	-4/ 392	235	68	4.6	2.75
V5S2.EJ 1	0.94	5.02	0.63	2.32	7.48	3.71	0.433	0.41	0.11	1.654	0.14	1.969	-4/ 392	235	109	7.1	3.12
V5S2.EJ 1 1/4	1.18	5.53	0.63	2.44	7.48	3.85	0.433	0.41	0.11	1.654	0.14	1.969	-4/ 392	235	185	8.2	3.50
V5S2.EJ 1 1/2	1.50	6.50	0.63	2.99	9.25	4.76	0.551	0.55	0.14	1.969	0.18	2.750	-4/ 392	235	268	13.2	3.88
V5S2.EJ 2	1.97	7.01	0.75	3.33	9.25	5.11	0.551	0.55	0.14	1.969	0.18	2.750	-4/ 392	235	486	17.6	4.75
V5S2.EJ 2 1/2	2.52	7.50	0.75	4.11	12.80	6.15	0.669	0.67	0.18	2.750	0.22	4.010	-4/ 392	235	843	32	5.50
V5S2.EJ 3	2.99	7.99	0.75	4.39	12.80	6.43	0.669	0.67	0.18	2.750	0.22	4.010	-4/ 392	235	1150	40.2	6.00
V5S2.EJ 4	3.86	9.02	0.75	5.33	12.80	7.52	0.866	0.91	0.22	4.010	0.26	4.921	-4/ 392	235	2055	63.9	7.50

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED,LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.

V5S2 Series

FILE NO.
SUB347

TITLE

Ball Valve- Stainless Steel
Full Port
150 ANSI Flange

DR
MDC


DATE
10-12-22

CH'KD
MWS

DATE
08-05-15

ENGR
MWS

DATE
08-05-15



**DynaQuip
Controls**