


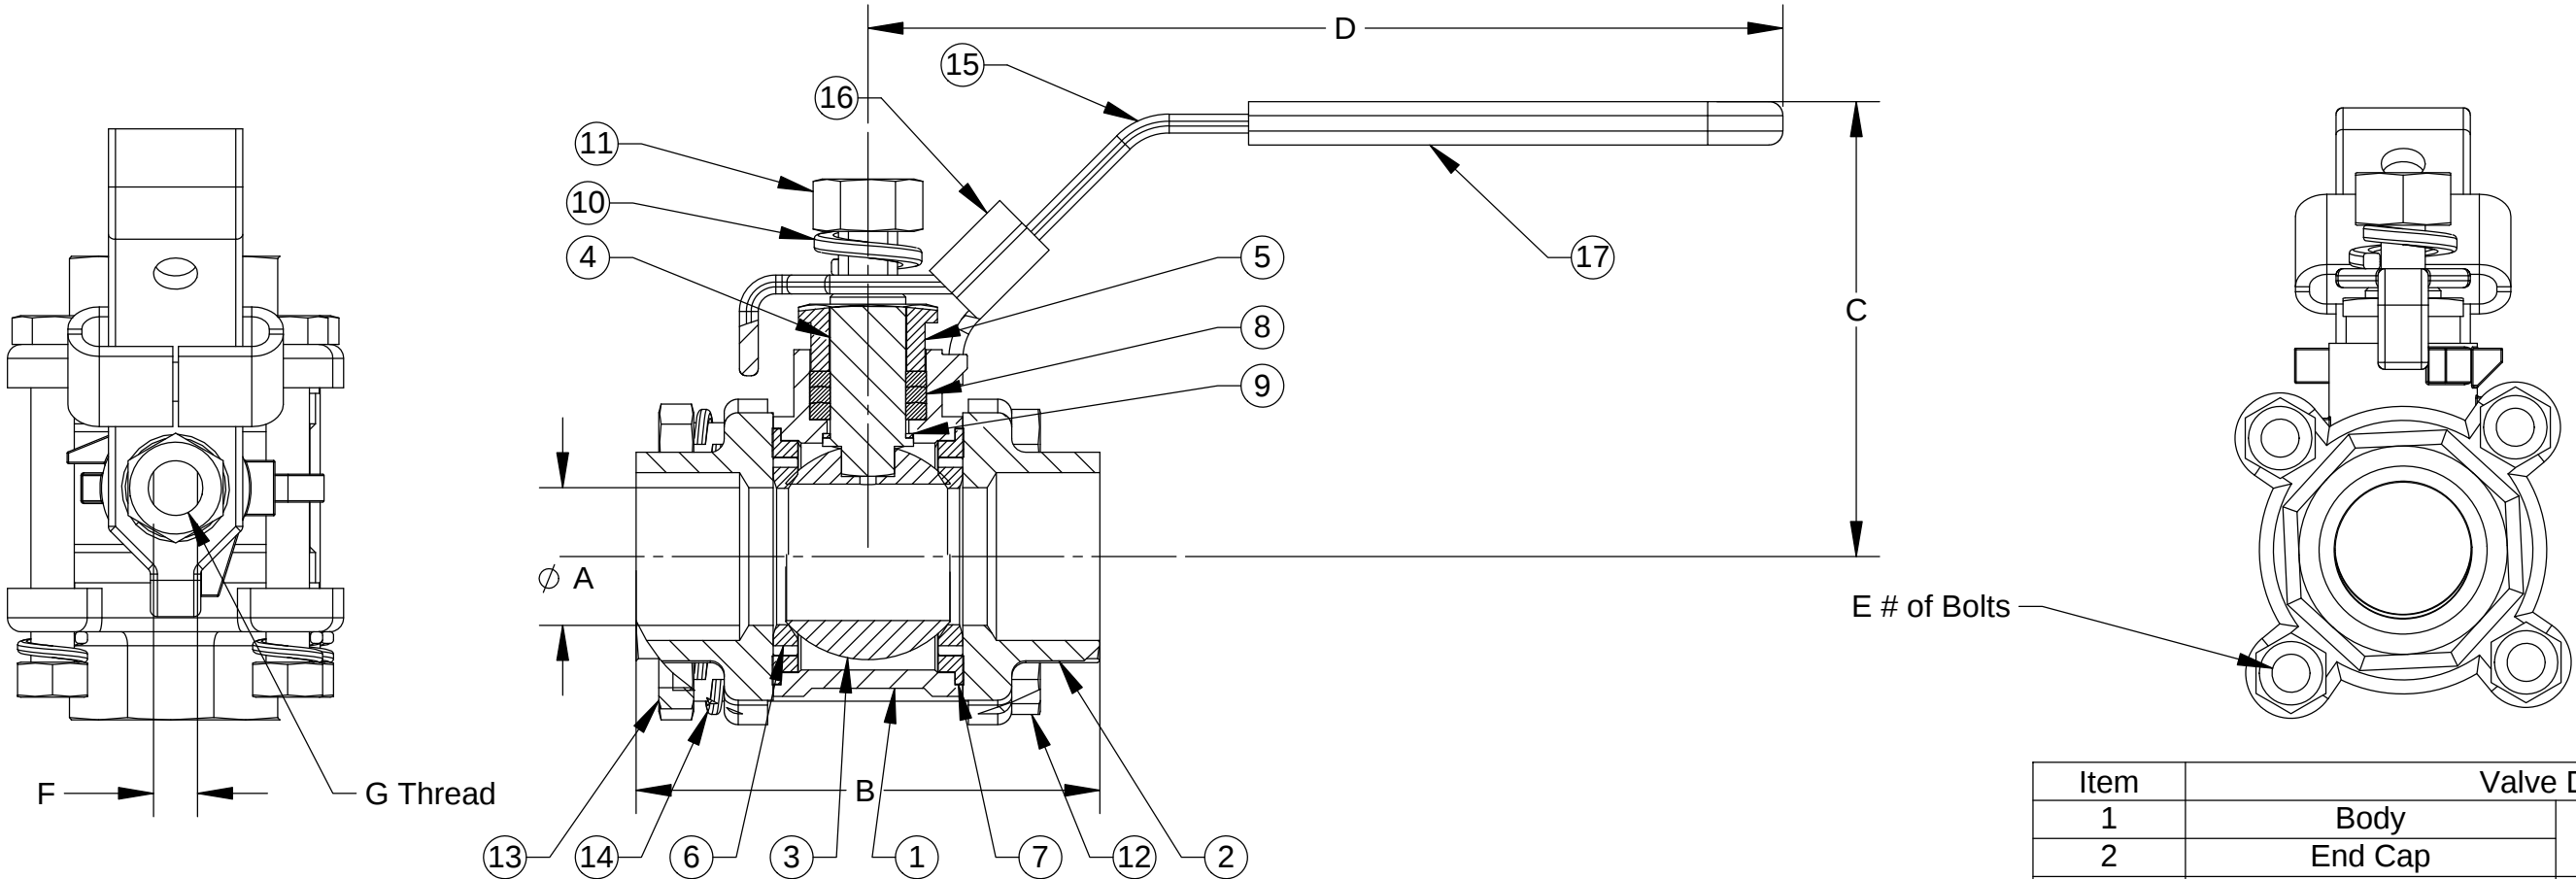

Temperature Rated at -4°F to 392°F
Pressure Rated at 1000 WOG

Model No.	Dimensions							Weight
	A	B	C	D	E	F	G	lbs
V6S2.C90P 1/4	0.46	2.56	2.37	3.86	4	0.20	3/8"-24UNF	0.8
V6S2.C90P 3/8	0.49	2.56	2.37	3.86	4	0.20	3/8"-24UNF	0.8
V6S2.C90P 1/2	0.59	2.56	2.45	3.86	4	0.20	3/8"-24UNF	1.1
V6S2.C90P 3/4	0.79	2.95	2.54	4.76	4	0.26	7/16"-20UNF	1.5
V6S2.C90P 1	0.98	3.35	3.15	5.79	4	0.31	7/16"-20UNF	2.3
V6S2.C90P 1 1/4	1.26	3.98	3.35	5.79	4	0.31	7/16"-20UNF	3.5
V6S2.C90P 1 1/2	1.50	4.41	4.06	7.40	4	0.39	1/2"-20UNF	5.3
V6S2.C90P 2	1.97	5.12	4.37	7.40	4	0.39	1/2"-20UNF	6.8
V6S2.C90P 2 1/2	2.48	6.38	5.59	9.65	4	0.47	3/4"-10UNC	14.3
V6S2.C90P 3	2.99	7.40	5.91	9.65	6	0.47	3/4"-10UNC	20.9
V6S2.C90P 4	3.78	8.82	7.17	12.44	6	0.63	1"-8UNC	41.9

Item	Valve Data	
1	Body	ASTM A351-CF8M
2	End Cap	
3	Ball	ASTM A351-CF8M
4	Stem	ASTM A276-316
5	Gland Nut	AISI 304
6	Seat	PTFE / RTFE
7	Seal	PTFE
8	Packing	
9	Thrust Washer	
10	Spring Washer	AISI 304
11	Stem Nut	
12	Bolt	
13	Nut	
14	Spring Washer	
15	Handle	PVC
16	Locking Device	
17	Handle Sleeve	

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED,LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.

V6S2.C Series

FILE NO.
SUB351

TITLE

Ball Valve- Stainless Steel
Full Port
Socket Weld

DR
MWS

DATE
08-05-15

CHKD
MWS

DATE
08-05-15

ENGR
MWS

DATE
08-05-15