


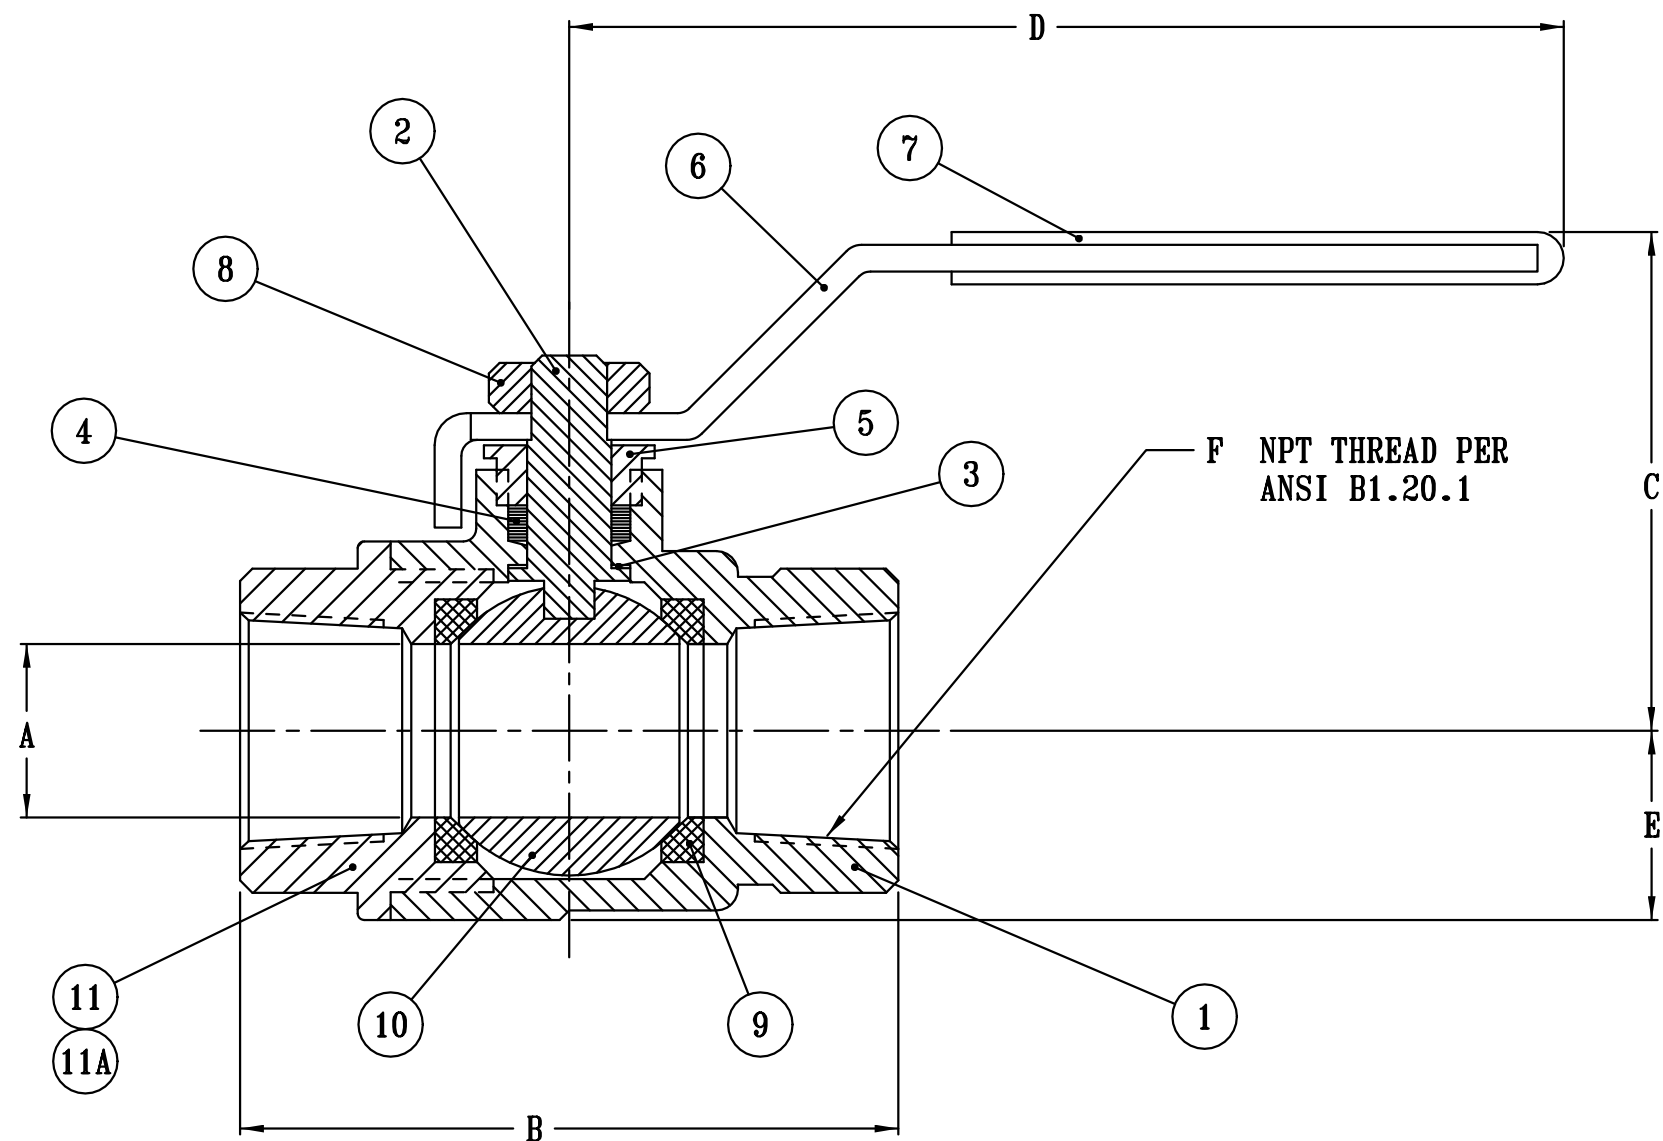

TEMP: -20°F TO 425°F

CATALOG NO.	DIMENSIONS						PRESSURE RATING	C _v	WT. LBS.
	A	B	C	D	E	F			
VMA2-A9 1/4	.38	1.97	1.80	3.81	.56	1/4-18	600 WDG 150 WSP	7.0	.53
VMA2-A9 3/8	.38	1.97	1.80	3.81	.56	3/8-18	600 WDG 150 WSP	7.0	.49
VMA1-A9 1/2	.50	2.19	1.88	3.81	.63	1/2-14	600 WDG 150 WSP	10.0	.59
VMA1-A9 3/4	.69	2.53	2.14	4.62	.75	3/4-14	600 WDG 150 WSP	25.0	1.00
VMA1-A9 1	.89	3.18	2.30	4.62	.93	1 - 11 1/2	600 WDG 150 WSP	40.0	1.50
VMA1-A9 1 1/4	1.06	3.50	2.71	6.31	1.08	1 1/4-11 1/2	600 WDG 150 WSP	52.0	2.42
VMA1-A9 1 1/2	1.31	3.97	2.90	6.31	1.26	1 1/2-11 1/2	600 WDG 150 WSP	90.0	3.31
VMA1-A9 2	1.56	4.30	3.09	7.19	1.46	2 - 11 1/2	600 WDG 150 WSP	115.0	4.38

11A	END CAP	BRASS ASTM B16 (1/4 - 3/4 SIZES)
11	END CAP	BRONZE ASTM B584
10	BALL	BRASS ASTM B16, CHROME PLATED
9	BALL SEAT	REINFORCED PTFE
8	NUT	CARBON STEEL, ZINC PLATED
7	HANDLE COVER	VINYL
6	HANDLE	CARBON STEEL, ZINC PLATED
5	PACK NUT	BRASS ASTM B16
4	STEM SEAL	PTFE
3	THRUST WASHER	REINFORCED PTFE
2	STEM	BRASS ASTM B16
1	BODY	BRONZE ASTM B584
ITEM	PART NAME	MATERIAL

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS. (MILW)

NO. VMA2/VMA1-A9 FILE NO. SUB060

TITLE
BALL VALVE - VMA SERIES
2 PC. BRNZ - NPT THREADS

DR	DATE	CH' KD	DATE	ENGR	DATE
MJP	09-30-19	LJH	01-25-00	LJH	01-25-00

