


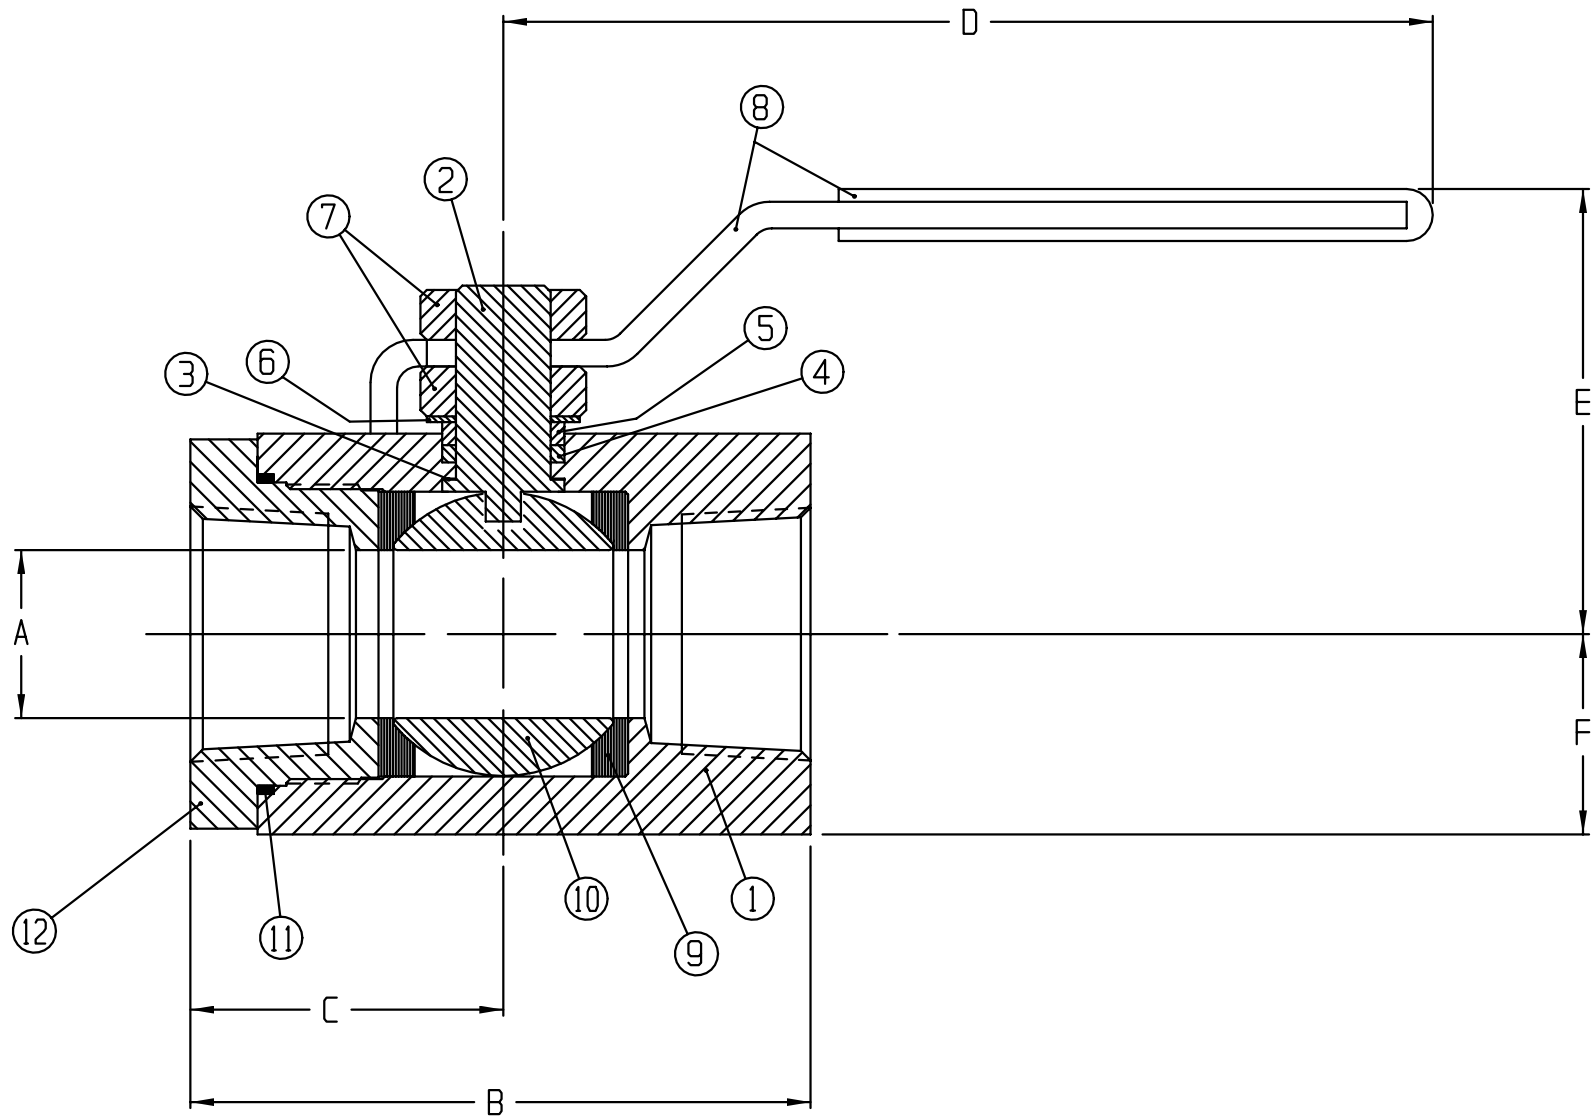

CATALOG NO.	DIMENSIONS						PRESSURE RATING	C _V	WT. LBS.
	A	B	C	D	E	F			
VME2-A90A 1/4	.40	2.00	1.00	3.78	1.63	.53	2000 CWP 150 SWP	6	.6
VME2-A90A 3/8	.40	2.00	1.00	3.78	1.63	.53	2000 CWP 150 SWP	12	.6
VME1-A90A 1/2	.54	2.37	1.12	3.78	1.73	.63	2000 CWP 150 SWP	15	.8
VME1-A90A 3/4	.68	2.90	1.40	5.10	2.08	.81	2000 CWP 150 SWP	23	1.4
VME1-A90A 1	.88	3.41	1.65	5.10	2.30	1.00	2000 CWP 150 SWP	36	2.4

12	END CAP	STEEL C12L14, ZINC PHOS COAT
11	END CAP SEAL	PTFE
10	BALL	STAINLESS STEEL, TYPE 316
9	BALL SEAT	REINFORCED PTFE
8	HANDLE COVER	VINYL
8	HANDLE	STEEL, ZINC PLATE
7	NUT	STEEL, ZINC PLATE
6	SPRING WASHER	STEEL, ZINC PLATE
5	FOLLOWER	STAINLESS STEEL, 304
4	STEM SEAL	REINFORCED PTFE
3	THRUSTWASHER	REINFORCED PTFE
2	STEM	STAINLESS STEEL, TYPE 316
1	BODY	STEEL C12L14, ZINC PHOS COAT
ITEM	PART NAME	MATERIAL

UNCONTROLLED DRAWING THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.	NO.		VME1-A90A			FILE NO. SUB077
	TITLE		BALL VALVE - VME SERIES - BAR STOCK NPT THREADS - 316 SS BALL & STEM (NEW OVER ALL LENGTH)			
	DR EJC	DATE 11-07-96	CH' KD LJH	DATE 11-07-96	ENGR LJH	DATE 11-07-96
						