



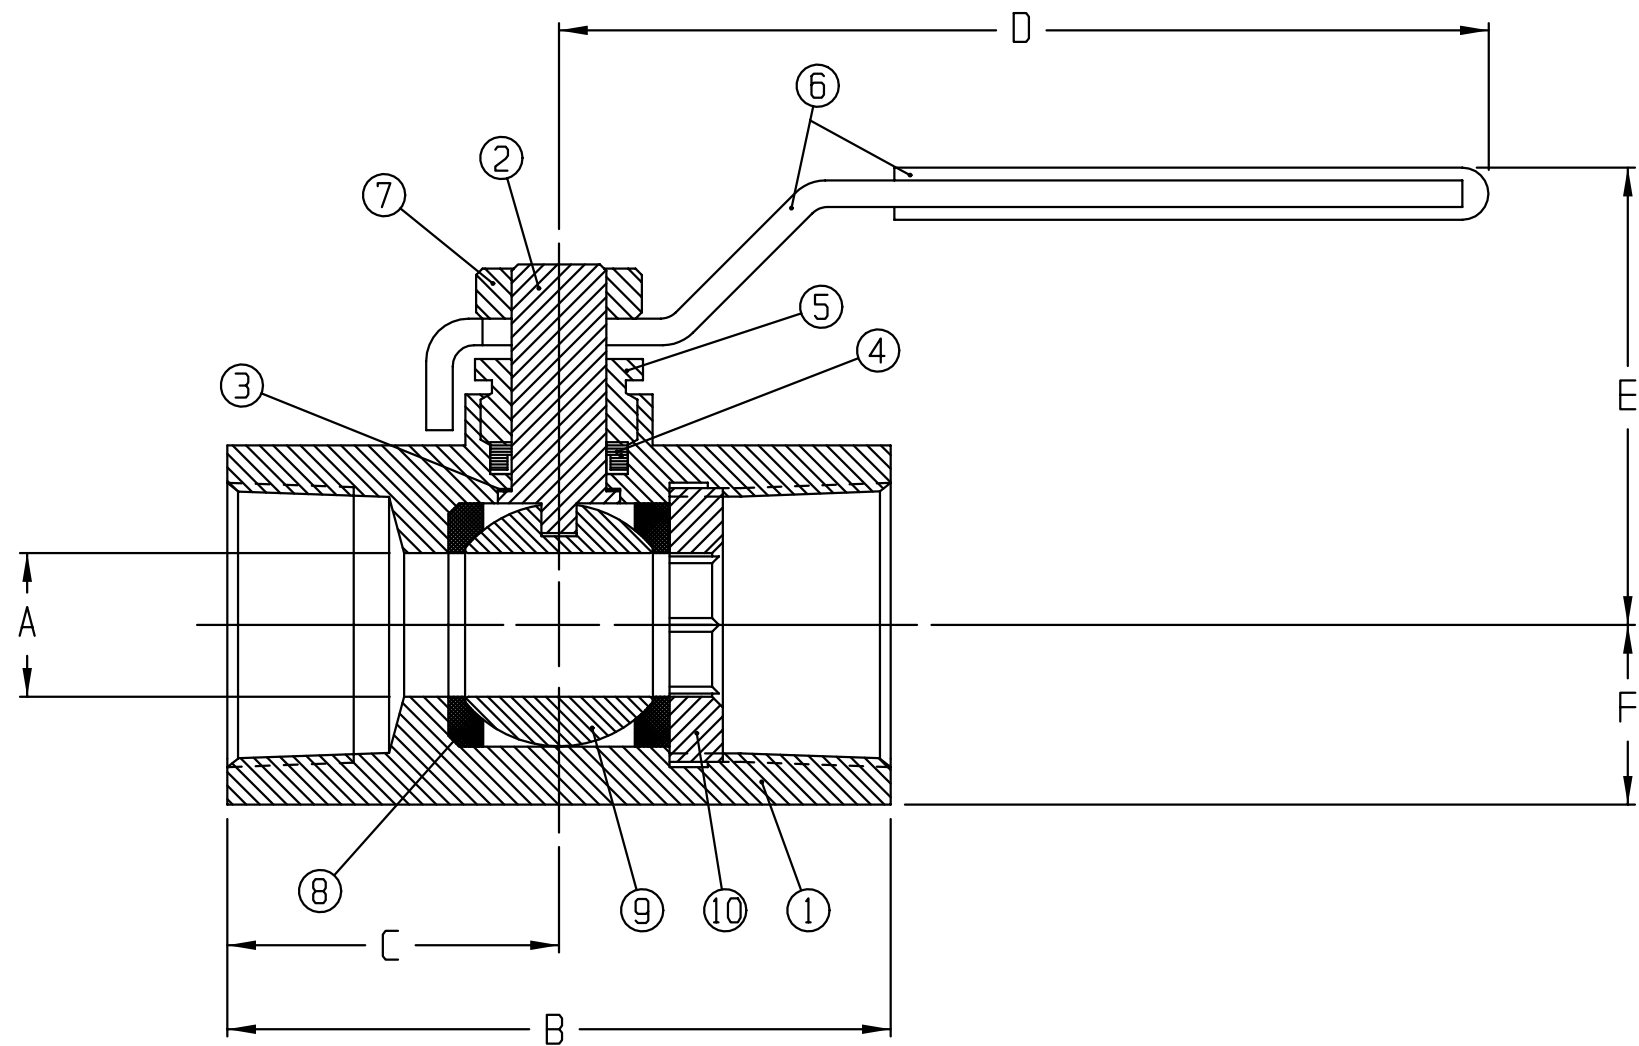

FEDERAL SPECIFICATION; WW-V-35C,
TYPE II
COMPOSITION, CS
STYLE 3

CATALOG NO.	DIMENSIONS								PRESSURE RATING	C _V	WT. LBS.
	A	B	C	D	E	F	G	H			
VME3-A9 1 1/2	1.00	4.00	2.00	6.10	2.58	1.13	.94	1.50	1500 CWP 150 SWP	52	3.1
VME3-A9 2	1.25	4.50	2.25	6.10	2.98	1.38	.94	1.50	1500 CWP 150 SWP	95	5.0

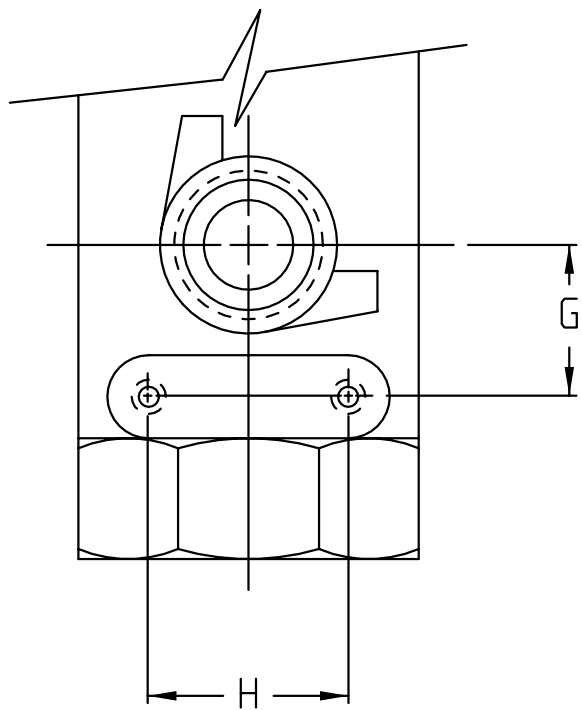

10	SEAT RETAINER	STEEL C12L14, PHOSPHATE COAT
9	BALL	STEEL C12L14, CHROME PLT.
8	BALL SEAT	REINFORCED PTFE
7	HANDLE NUT	STEEL, ZINC PLATE
6	HANDLE COVER	VINYL
6	HANDLE	STEEL, ZINC PLATE
5	STEM GLAND	STEEL C12L14, ZINC PLT.
4	STEM SEAL	REINFORCED PTFE
3	THRUSTWASHER	REINFORCED PTFE
2	STEM	STEEL C12L14, NICKEL PLT.
1	BODY	STEEL ASTM A216 GR. WCB, PHOS. COAT
ITEM	PART NAME	MATERIAL

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. VME3-A9

FILE NO. SLB018

TITLE

BALL VALVE - VME SERIES
CAST - NPT THREADS

DR
MJP

DATE
11-07-96

CH' KD
LJH

DATE
01-21-00

ENGR
LJH

DATE
01-21-00

DynaQuip
Controls