

Brass

VYH Series

For General Industrial Applications

3-Way Utility Ball Valve

400 PSI CWP

VYH Series three-way utility ball valve is a 90° "L" port design and features blowout-proof


Standard Port
1/4"-3"

stem, chrome-plated brass ball, and NPT end connections. Designed for automation, this valve has double O-ring

stem packing for reduced torque and ISO 5211 mounting pad. Operating temperature range: -20° to 450° F.

- Low Friction Stem Seals
- Blowout-Proof Stem Design
- Four Seat Design
- ISO 5211 Direct Mount Pad

This valve is automated on pages 4 and 5.

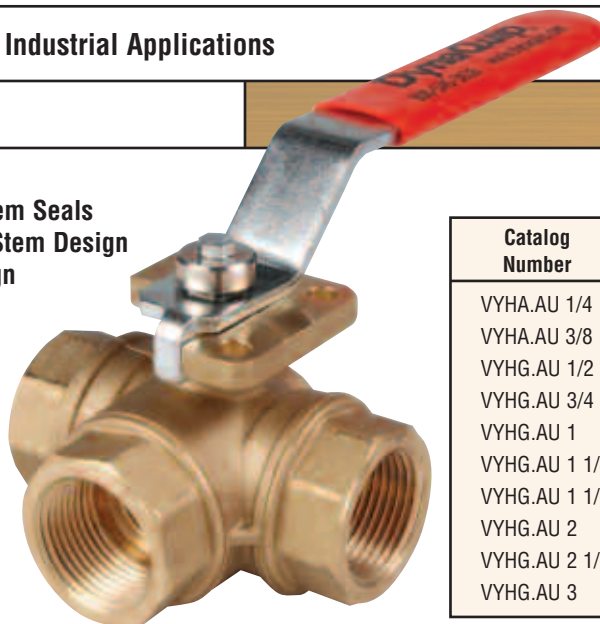

Catalog Number

VYHA.AU 1/4
VYHA.AU 3/8
VYHG.AU 1/2
VYHG.AU 3/4
VYHG.AU 1
VYHG.AU 1 1/4
VYHG.AU 1 1/2
VYHG.AU 2
VYHG.AU 2 1/2
VYHG.AU 3

VNH3 Series

For Commercial and General Industrial Applications

1-Piece Mini Ball Valve

450 PSI CWP

VNH3 Series mini ball valves are for small line fluid and gas control applications.

Full Port
1/8"-1/4"
Standard Port
3/8"-1/2"

Industrial quality, one-piece brass bar stock design chrome plated for corrosion resistance. Multi-directional operation. Operating temperature range: -4° to 200° F.

- Space Saving
- PTFE Seats, Viton® Stem Seal
- Male or Female Threads
- Corrosion-Resistant Nylon Wing Handle
- UL Approved for Refrigerant



Catalog Number Threads Port

VNH3.AM 1/8	F X F	FULL
VNH3.AM 1/4	F X F	FULL
VNH3.AM 3/8	F X F	STANDARD
VNH3.AM 1/2	F X F	STANDARD
VNH3.PM 1/4	M X F	FULL
VNH3.PM 3/8	M X F	STANDARD
VNH3.PM 1/2	M X F	STANDARD