MODEL	ECP23Z5E22	ECP24Z5E22	ECP25Z5E22	ECP26Z5E22	ECP27Z5E22	ECP28Z5E22	ECP2AZ5E25	ECP2BZ5E07
SIZE	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	3 NPT	4 NPT
WOG	230 PSI	230 PSI	230 PSI	230 PSI	230 PSI	230 PSI	145 PSI	145 PSI
A	3.32	3.73	4.72	5.66	6.20	7.09	10.42	12.10
B	.59	.77	.98	1.26	1.5	1.97	2.99	3.99
C	2.41	2.54	2.68	3.13	3.64	5.68	6.45	7.05
D	7.59	7.72	7.86	8.31	8.82	10.86	11.63	14.78
E	4.24	4.24	4.24	4.24	4.24	4.24	4.24	5.10
F	5.66	5.66	5.66	5.66	5.66	5.66	5.66	4.49
G	5.18	5.18	5.18	5.18	5.18	5.18	5.18	7.73
ACTUATOR	DE155	DE155	DE155	DE155	DE155	DE155	DE305	MA4
Media Temp	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F
Ambient Temp	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F	33°F / 113°F
WT. LBS.	5.3	5.5	5.8	6.2	6.5	7.5	15.0	20.9

3.00 Above Shaft
Minimum Distance
For Cover Removal

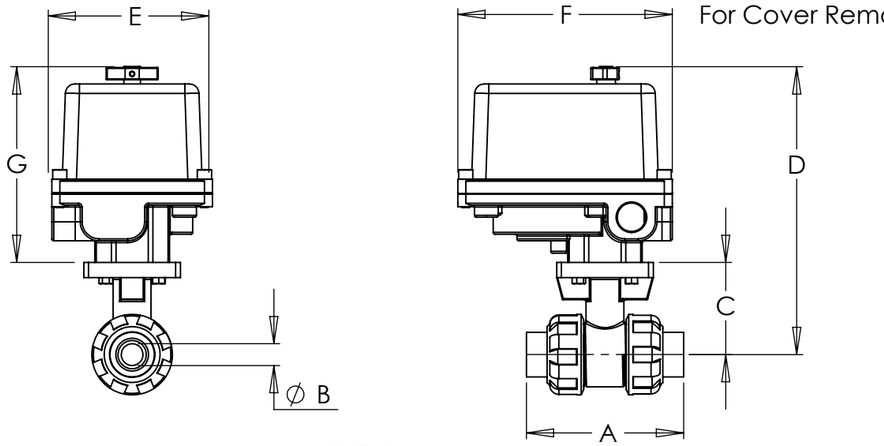

DE Series

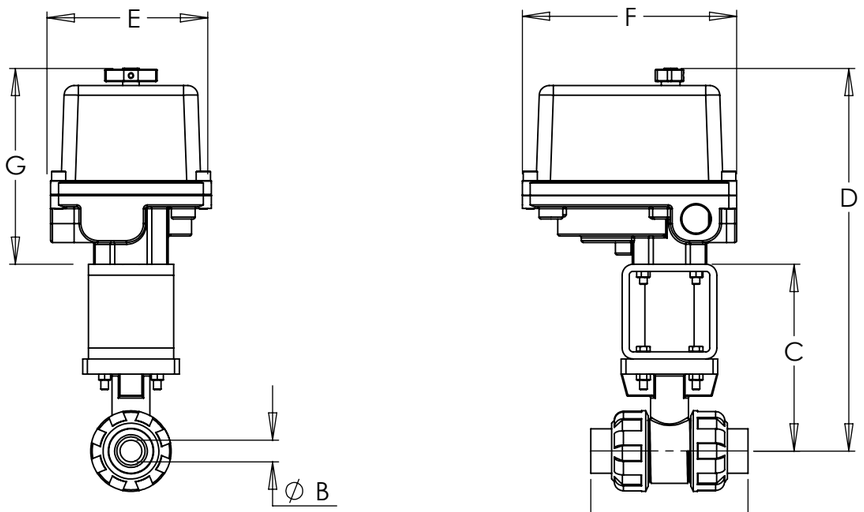

For 2-3 Inch Valves

Valve Data

Body/End Cap	PVC
Stem	PVC
Ball	PVC
Seats	EPDM
Stem Seal	PTFE

Model No. Voltage Code:
ECP2XA5EXX**Y**
Code (Suffix)
Blank = 115VAC
B = 240VAC
H = 12-24 VAC/VDC (DE only)

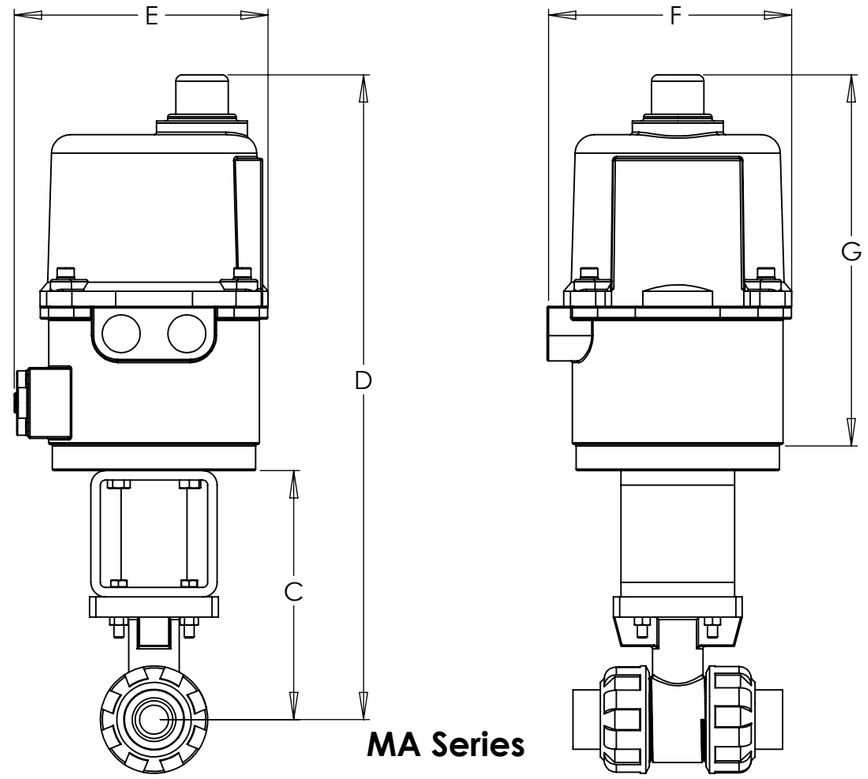

MA Series

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED,LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. ECP SERIES

FILE NO. SUB428

TITLE

PVC VALVE
EPDM/PTFE FULL PORT
DE/MA SERIES ELECTRIC ACTUATOR

DR	DATE	CH'KD	DATE	ENGR	DATE
MDC	12-13-22	CMM	12-20-18	CMM	12-20-18

DynaQuip Controls