
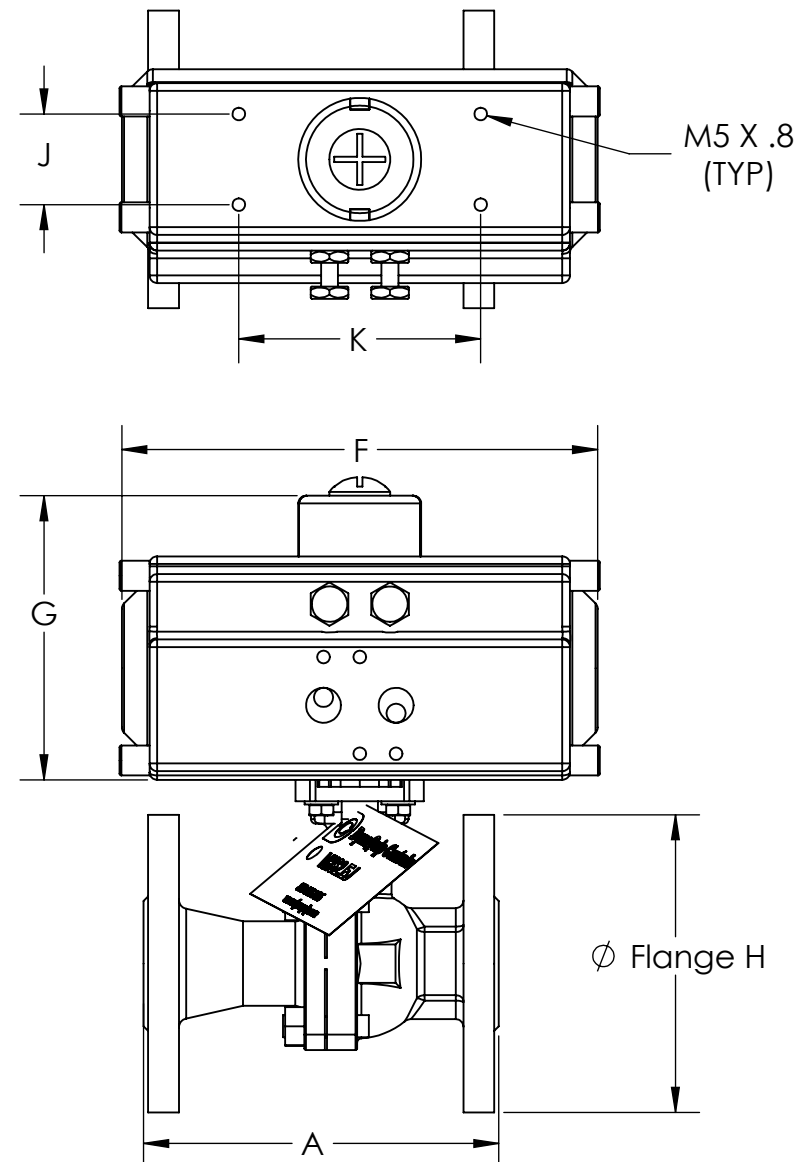


Model	P5S23EJDA032	P5S24EJDA052	P5S25EJDA052	P5S26EJDA052	P5S27EJDA063	P5S28EJDA075	P5S29EJDA083	P5S2AEJDA092	P5S2BEJDA105
Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Cv	37	68	109	185	268	486	843	1150	2055
A	4.25	4.663	5.00	5.50	6.50	7.00	7.50	8.00	9.00
B	0.59	0.79	0.94	1.18	1.50	1.97	2.52	2.99	3.94
C	2.03	2.17	2.28	2.44	2.99	3.33	4.11	4.39	5.33
D	4.59	5.87	2.98	6.14	7.24	8.05	9.19	9.90	11.35
E	2.05	2.79	2.79	2.79	3.19	3.70	3.88	4.27	4.78
F	4.49	6.24	6.24	6.24	7.48	8.15	8.39	10.20	11.30
G	2.56	3.70	3.70	3.70	4.25	4.72	5.08	5.51	6.02
H	3.50	3.88	4.25	4.62	5.00	6.00	7.00	7.50	9.00
J	0.98	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18
K	1.97	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15
Sized for Max. Δ PSI	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi	285 psi
Actuator	HP032DA	HP052DA	HP052DA	HP052DA	HP063DA	HP075DA	HP083DA	HP092DA	HP105DA
Ambient Temp	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F
Media Temp	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F
Wt. lbs	4.80	6.80	9.30	10.40	16.70	23.30	38.80	51.00	78.20

PRESSURE RATING PER ANSI 150:
275 PSI AT 100°F
235 PSI AT 200°F

FOR APPLICATIONS EXCEEDING LISTED
TEMPERATURES, CALL TO DISCUSS OPTIONS

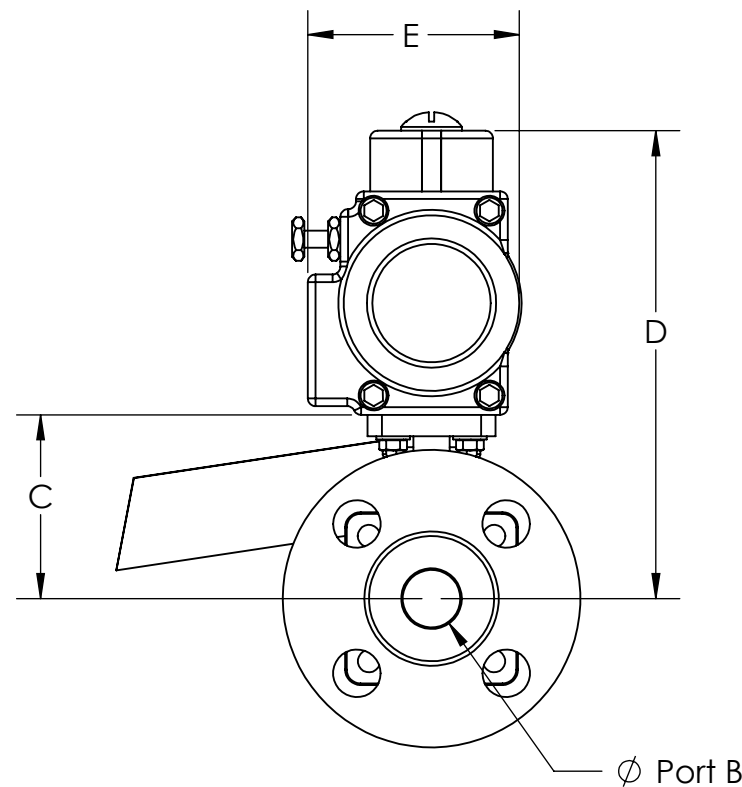

Valve Data

Body/End Cap	ASTM A351-CF8M (316 Stainless)
Stem	316 Stainless Steel
Ball	316 Stainless Steel
Seats	RTFE
Thrustwasher	CTFE
Stem Seal	VITON O-Ring

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.	P5 Series	FILE NO. Sub339
-----	-----------	--------------------

TITLE	Ball Valve SS Full Port - #150 Flange HP-DA Actuator
-------	---

DR MDC	DATE 06-18-24	CH'KD MWS	DATE 11-10-15	ENGR MWS	DATE 11-10-15
-----------	------------------	--------------	------------------	-------------	------------------

