


Model	PVA61AMSR05210	PVA62AMSR05210	PVA63AMSR05210	PVA64AMSR05212	PVA65AMSR06312	PVA66AMSR07512	PVA67AMSR07512	PVA68AMSR08312
Size	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT
Cv	8	10	15	35	60	105	138	270
CWP	600 psi	600 psi	600 psi	600 psi	600 psi	600 psi	600 psi	600 psi
A	2.68	2.68	2.68	3.20	3.46	4.17	4.72	5.39
B	0.44	0.50	0.59	0.79	0.98	1.26	1.50	1.97
C	1.59	1.59	1.59	1.85	2.10	2.21	2.88	3.21
D	5.47	5.47	5.47	5.99	6.65	7.87	8.42	9.27
E	2.79	2.79	2.79	2.79	3.19	3.70	3.70	3.88
F	6.24	6.24	6.24	6.24	7.48	8.15	8.15	8.39
G	3.70	3.70	3.70	3.70	4.25	4.72	4.72	5.08
Sized for Max. Δ PSI	300 psi	300 psi	300 psi	300 psi	300 psi	300 psi	300 psi	300 psi
Actuator	HP052SR10	HP052SR10	HP052SR10	HP052SR12	HP063SR12	HP075SR12	HP075SR12	HP083SR12
Ambient Temp	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F
Media Temp	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F	-4° / 235°F
Wt. lbs	3.52	3.52	3.52	4.23	6.76	10.22	12.31	16.28

FOR APPLICATIONS EXCEEDING LISTED TEMPERATURES, CALL TO DISCUSS OPTIONS

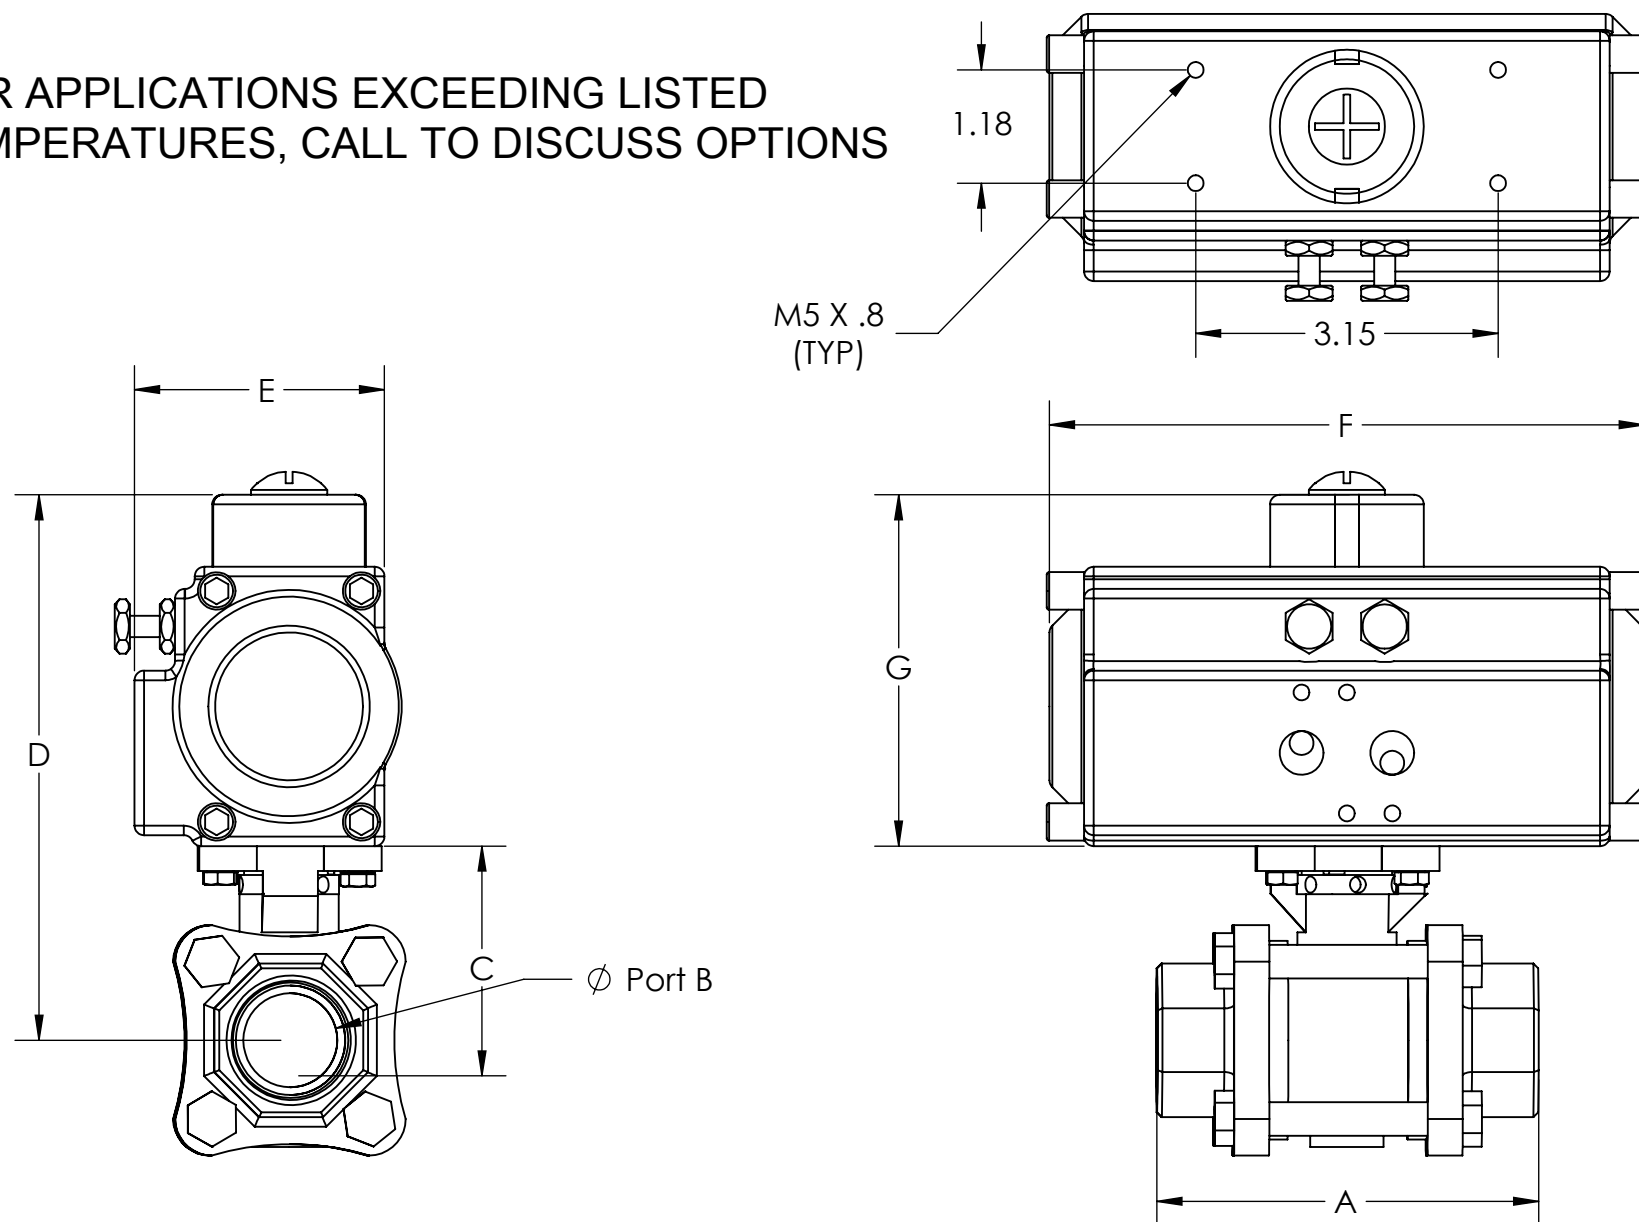

Valve Data

Body/End Cap	Bronze B584 C84400
Stem	316 Stainless Steel
Ball	316 Stainless Steel
Seats	PTFE
Thrustwasher	PTFE
Stem Seal	VITON O-Ring

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. PVA Series FILE NO. Sub326

TITLE Ball Valve Bronze Full Port - NPT HP-SR NC Actuator

DR	DATE	CH'KD	DATE	ENGR	DATE
CMM	12-09-22	MWS	08-05-15	MWS	08-05-15

