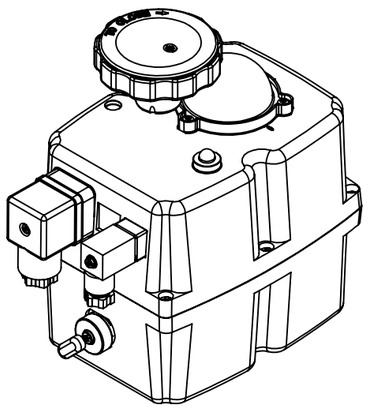

MODEL	MAX TORQUE IN/LBS BREAK / RUN	VOLTAGE	A	B	C	D	STAR DRIVE /DEEP	MOUNTING	ENCLOSURE	DUTY CYCLE	SPEED 90°	WEIGHT LBS
AJE2V	221 / 177	12 VAC/VDC	7.13"	4.34"	6.65"	2.01"	.551 (14mm)/.63	FO3,F04,F05	IP67	75%	10 SEC	4.0
AJE3V	359 /309	12 VAC/VDC	7.13"	4.34"	6.65"	2.01"	.551 (14mm)/.63	F03,F04,F05	IP67	75%	10 SEC	4.2
AJE5V	530 / 486	12 VAC/VDC	7.13"	4.34"	7.72"	2.01"	.669 (17mm)/.70	F05,F07	IP67	75%	15 SEC	5.3
AJE7V	796 / 752	12 VAC/VDC	7.13"	4.34"	7.72"	2.01"	.669 (17mm)/.70	F05,F07	IP67	75%	32 SEC	6.6

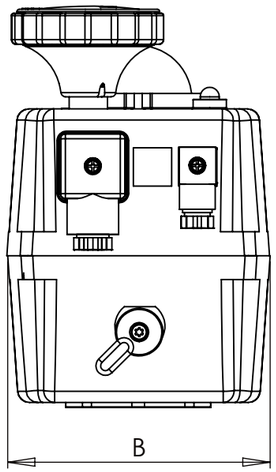

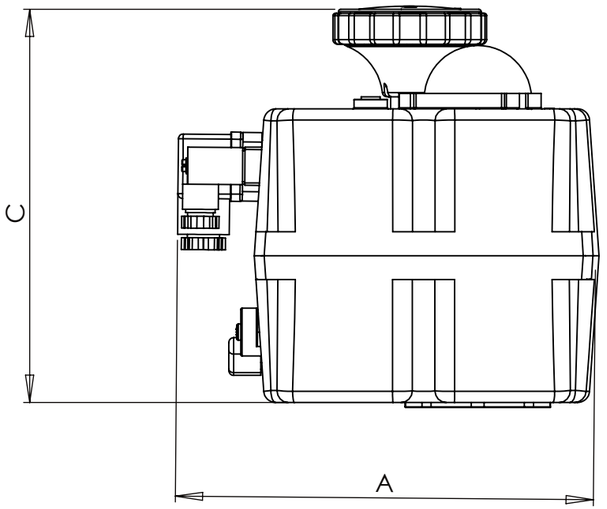

MOUNTING PATTERNS

FO	BCD	THREAD
F03	1.417	M5
F04	1.654	M5
F05	1.969	M6
F07	2.750	M8

TEMPERATURE: -4°F +158°F
HOUSING: POLYAMIDE
OUTPUT SHAFT: STAINLESS STEEL
FASTENERS: STAINLESS STEEL
MANUAL OVERRIDE: DECLUTCHING
COMPARTMENT HEATER: STANDARD
END OF TRAVEL SIGNAL: DRY CONTACT

OPTIONS:

BATTERY OPERATED FAIL SAFE
ADD SUFFIX
00D FOR FAIL OPEN
00F FOR FAIL CLOSE

MODULATING CONTROLS
(4-20mA, 0-10V , 1-10V)
ADD SUFFIX 550

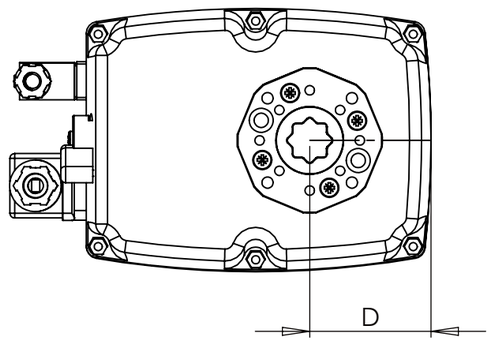

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED,LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. **12VAC/VDC AJE SERIES**

FILE NO. SUB424

TITLE

ELECTRIC ACTUATOR

DR	DATE	CH'KD	DATE	ENGR	DATE
CMM	10-22-18	CMM	10-22-18	CMM	10-22-18

DynaQuip Controls