
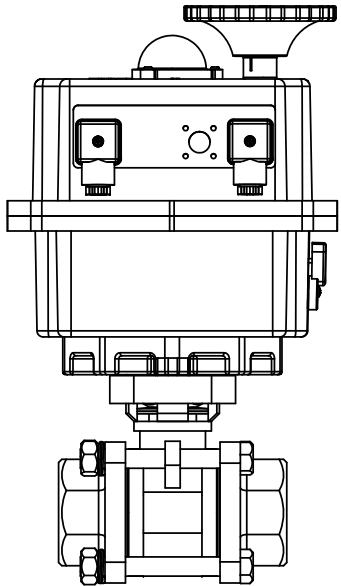
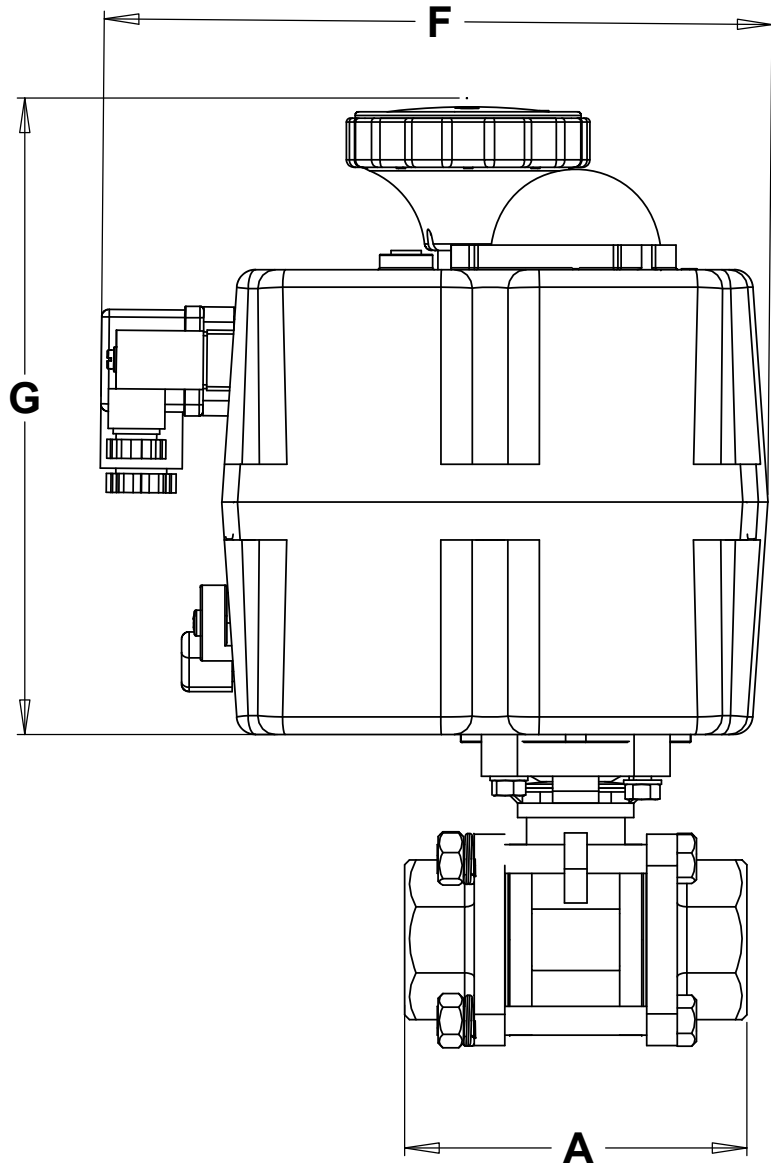


MODEL	E3S21AJJE2S	E3S22AJJE2S	E3S23AJJE2S	E3S24AJJE2S	E3S25AJJE2S	E3S26AJJE3S	E3S27AJJE3S	E3S28AJJE7S	E3S29AJJE15S	E3S2AAJJE15S	E3S2BAJJE15S
SIZE	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT	2 1/2 NPT	3 NPT	4 NPT
TEMPERATURE	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F	-4°F / +158°F
WOG	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI	1000 PSI
A	2.17	2.36	2.95	3.15	3.54	4.33	4.72	5.51	7.28	8.07	9.45
B	0.31	.39	.59	.79	.98	1.26	1.5	1.97	2.56	2.99	3.94
C	1.59	1.59	1.59	1.77	1.87	2.19	2.57	2.87	4.13	4.39	5.35
D	8.24	8.24	8.24	8.42	8.52	8.84	9.22	10.59	14.13	14.39	15.35
E	4.34	4.34	4.34	4.34	4.34	4.34	4.34	4.34	8.43	8.43	8.43
F	7.13	7.13	7.13	7.13	7.13	7.13	7.13	7.13	9.26	9.26	9.26
G	6.65	6.65	6.65	6.65	6.65	6.65	6.65	7.72	10.00	10.00	10.00
ACTUATOR	AJE2S	AJE2S	AJE2S	AJE2S	AJE2S	AJE3S	AJE3S	AJE7S	AJE15S	AJE15S	AJE15S
SPEED 90°	10 SEC	10 SEC	10 SEC	10 SEC	10 SEC	10 SEC	10 SEC	30 SEC	34 SEC	34 SEC	34 SEC
WT. LBS.	5.3	5.3	5.3	5.8	6.6	7.9	10.6	15.2	33.1	39.9	63.5
Sized max differential PSI	300	300	300	300	300	300	300	300	300	300	300

VOLTAGE:
JE2S - 24 - 240 VDC / VAC 50/60Hz
JE3S - 24 - 240 VDC / VAC 50/60Hz
JE7S - 24 - 240 VDC / VAC 50/60Hz
JE15S - 24 - 240 VDC / VAC 50/60Hz

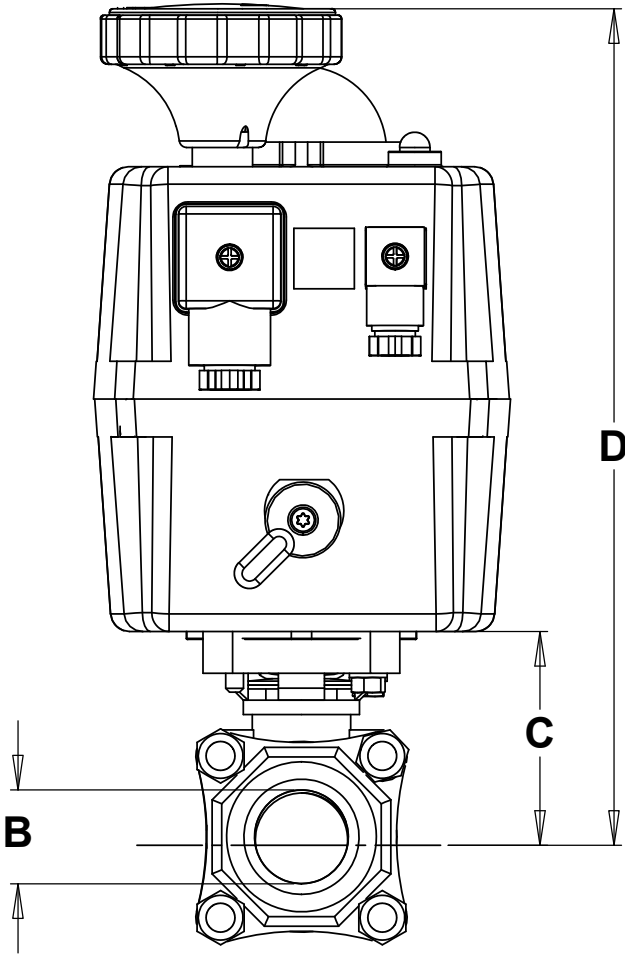

ACTUATOR ORIENTATION FOR
AJE15 AND AJE30

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. E3S SERIES

FILE NO.
SUB396

TITLE
BALL VALVE 3 PC. SS
FULL PORT
JE SERIES ELECTRIC ACTUATOR

DR MJP	DATE 07-30-19	CHKD MJP	DATE 05-15-17	ENGR MJP	DATE 05-15-17
-----------	------------------	-------------	------------------	-------------	------------------

