

## THE BOAT LIFT INDUSTRY



### EHW Series Electrically Automated Light Duty Brass Valves

The EHW series is utilized in boat lift operations because of their flexibility and exceptionally great value when compared to other automated valves.

#### Choose from multiple options:

- Voltages: 110 VAC, 220 VAC, 24 VAC/DC, 12 VDC
- Optional override handles – DC only
- Feedback options: none, dry contact, live open/close
- Maximum pressure 125 psid
- Media temperature 35 °F to 165 °F
- Media: water, oil, gas or similarly compatible with brass
- RTFE seats and seals
- Full flow valve (no restriction)
- NSF/ANSI 372 Certified Lead-Free valve for potable water service

From our WaterCop family, these 2-piece forged brass valves are full port with RTFE seats and mount in any position for maximum installation flexibility. Pigtail connections facilitate quick wiring.

\*Not Compatible with wireless sensors



### The DynaQuip Difference

For over eight decades DynaQuip has provided superior products and customer service. We offer flexible and innovative solutions for our unique customer needs. Our products are assembled, tested, and stored at our St. Clair, MO headquarters enabling us to offer quality assurance and industry best lead-times.


- Industry best lead-times
- Personal customer service
- Superior quality products
- Flexible, innovative solutions



**Click to watch our video  
and learn more**

## THE BOAT LIFT INDUSTRY

Model #	Size	Voltage	Feedback	Override	Features
EHW23AJP01	1/2	110 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW24AJP01	3/4	110 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW25AJP01	1	110 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW26AJP01	1 1/4	110 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW23AJP01B	1/2	220 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW24AJP01B	3/4	220 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW25AJP01B	1	220 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW26AJP01B	1 1/4	220 VAC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW23AJP01D	1/2	12 VDC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW24AJP01D	3/4	12 VDC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW25AJP01D	1	12 VDC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW26AJP01D	1 1/4	12 VDC	NO	NO	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW23AJP02D	1/2	12 VDC	NO	YES	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW24AJP02D	3/4	12 VDC	NO	YES	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW25AJP02D	1	12 VDC	NO	YES	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW26AJP02D	1 1/4	12 VDC	NO	YES	NEMA 4 w/ 3 Ft. 3-Conductor "Pigtail"
EHW23AJP11D	1/2	12 VDC	LIVE Open & Close	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW24AJP11D	3/4	12 VDC	LIVE Open & Close	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW25AJP11D	1	12 VDC	LIVE Open & Close	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW26AJP11D	1 1/4	12 VDC	LIVE Open & Close	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW23AJP12D	1/2	12 VDC	LIVE Open & Close	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW24AJP12D	3/4	12 VDC	LIVE Open & Close	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW25AJP12D	1	12 VDC	LIVE Open & Close	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW26AJP12D	1 1/4	12 VDC	LIVE Open & Close	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW23AJP21D	1/2	12 VDC	Dry Contact	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW24AJP21D	3/4	12 VDC	Dry Contact	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW25AJP21D	1	12 VDC	Dry Contact	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW26AJP21D	1 1/4	12 VDC	Dry Contact	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW23AJP22D	1/2	12 VDC	Dry Contact	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW24AJP22D	3/4	12 VDC	Dry Contact	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW25AJP22D	1	12 VDC	Dry Contact	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW26AJP22D	1 1/4	12 VDC	Dry Contact	YES	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW23AJP01C	1/2	24 VAC	NO	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW24AJP01C	3/4	24 VAC	NO	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW25AJP01C	1	24 VAC	NO	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"
EHW26AJP01C	1 1/4	24 VAC	NO	NO	NEMA 4 w/ 3 Ft. 6 Conductor "Pigtail"

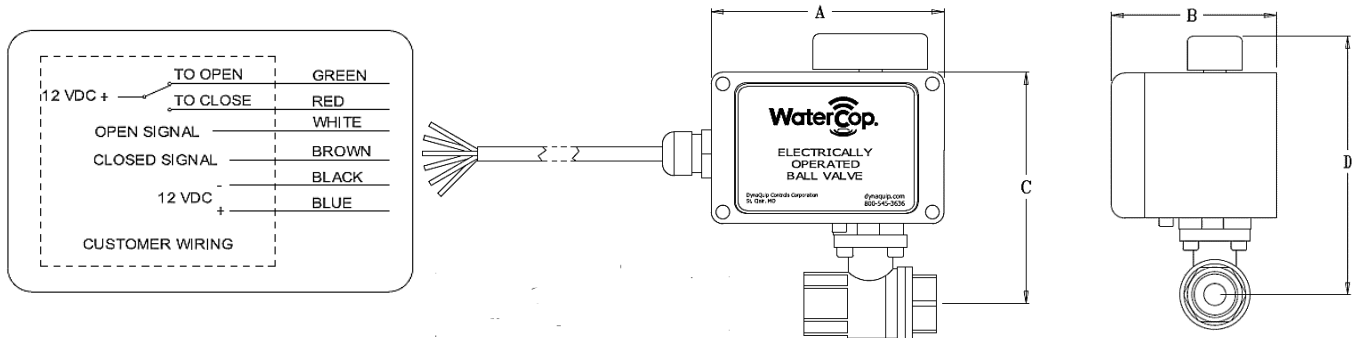

MODEL	ENDS	VOLTAGE	RUNNING	FULL LOAD	MANUAL OVERRIDE	A	B	C	D
EHW23AJP11D	1/2 - 14 NPT	12 VDC	.45 A	.83 A	NO	5.0	3.75	4.72	----
EHW24AJP11D	3/4 - 14 NPT	12 VDC	.45 A	.83 A	NO	5.0	3.75	5.02	----
EHW25AJP11D	1 - 11.5 NPT	12 VDC	.45 A	.83 A	NO	5.0	3.75	5.17	----
EHW26AJP11D	1 1/4 - 11.5 NPT	12 VDC	.45 A	.83 A	NO	5.0	3.75	5.43	----
EHW23AJP12D	1/2 - 14 NPT	12 VDC	.45 A	.83 A	YES	5.0	3.75	----	5.54
EHW24AJP12D	3/4 - 14 NPT	12 VDC	.45 A	.83 A	YES	5.0	3.75	----	5.84
EHW25AJP12D	1 - 11.5 NPT	12 VDC	.45 A	.83 A	YES	5.0	3.75	----	5.99
EHW26AJP12D	1 1/4 - 11.5 NPT	12 VDC	.45 A	.83 A	YES	5.0	3.75	----	6.25



Just Ask DynaQuip: 800-545-3636 | info@dynaquip.com | dynaquip.com