


MODEL	ACTUATOR	VALVE SIZE	A	B	C	D	E	F	G*	WT
92F60902SR07512F	HP075SR12F	2	9.82	3.71	8.15	4.72	4.75	5.10	1.70	9.9
92F60925SR07510F	HP075SR10F	2.5	10.32	3.71	8.15	4.72	5.50	5.60	1.80	11.2
92F60903SR08310F	HP083SR10F	3	10.88	3.88	8.39	5.08	6.00	5.80	1.80	12.9
92F60904SR09210F	HP092SR10F	4	12.21	4.27	10.20	5.51	7.50	6.70	2.00	19.8
92F60905SR10510F	HP105SR10F	5	13.42	5.70	11.30	6.02	8.50	7.40	2.20	26.9
92F60906SR12510F	HP125SR10F	6	14.89	5.42	13.39	6.89	9.50	8.00	2.20	36.9
92F60908SR16010F	HP160SR10F	8	17.94	6.85	18.74	8.54	11.75	9.40	2.40	68.8

* DIMENSION TAKEN
OVER SEATS

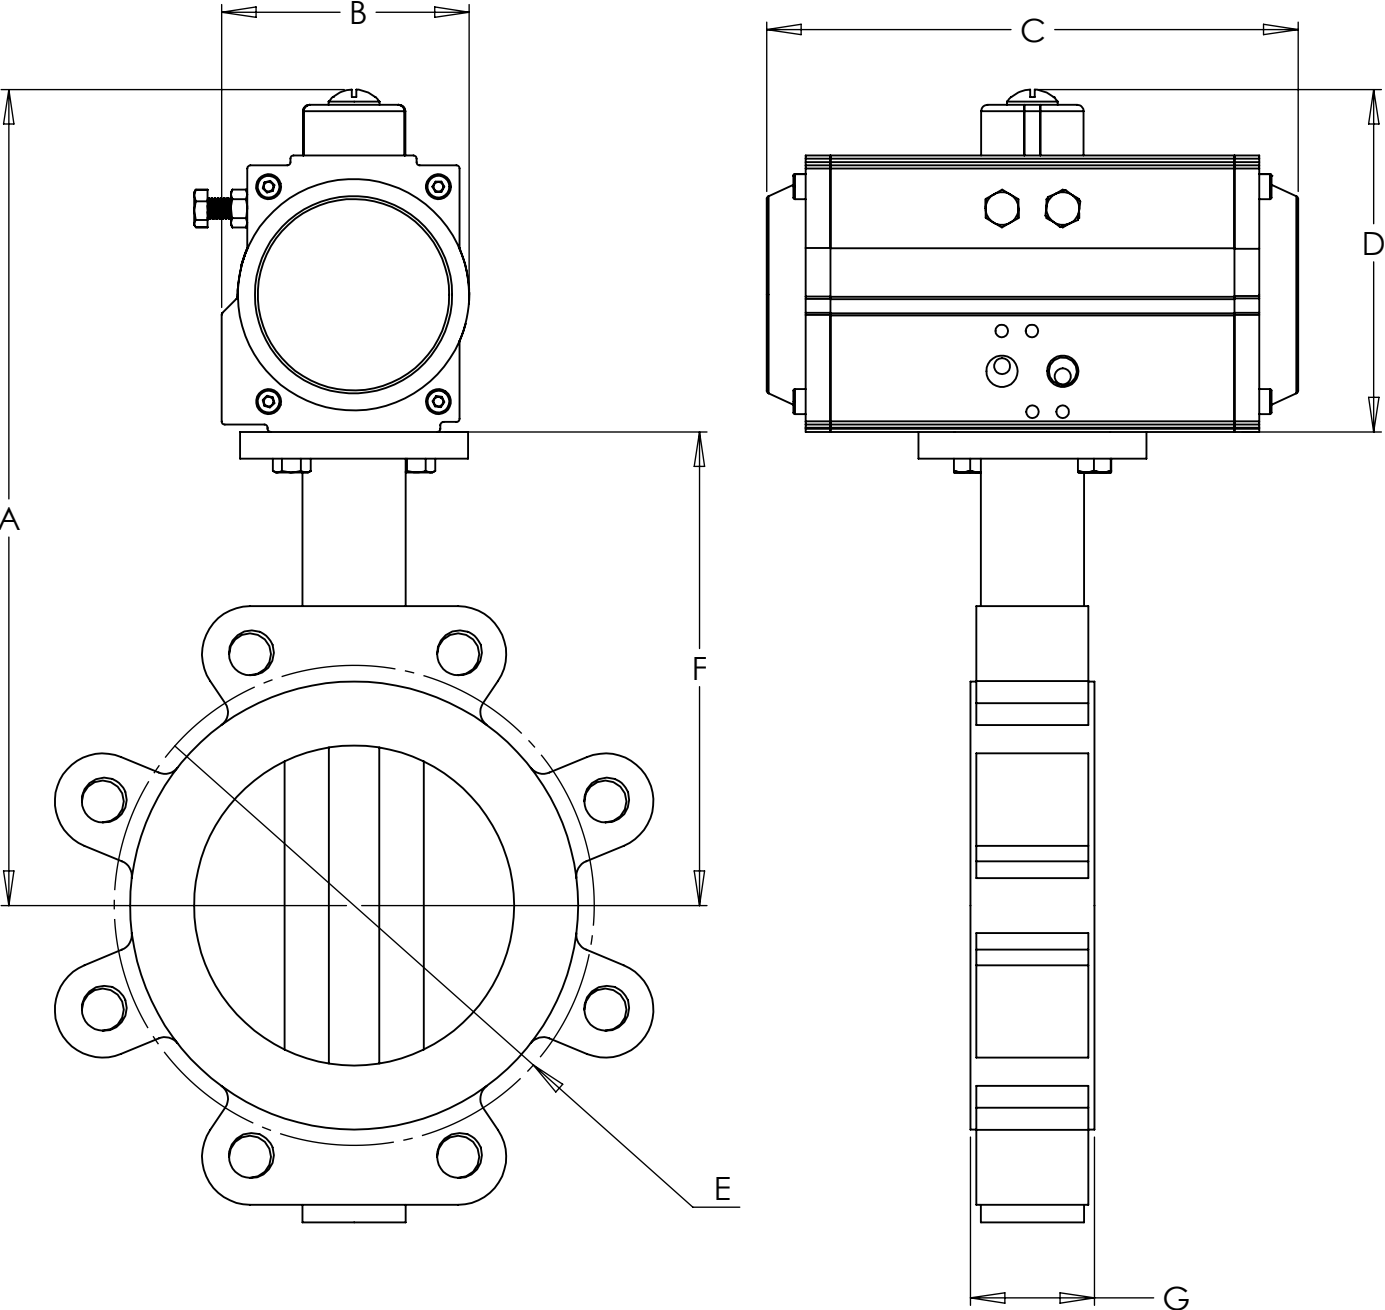

BUTTERFLY VALVE
SERIES 922182570
BODY: DUCTILE IRON LUG STYLE
DISC: NICKEL PLATED DUCTILE IRON
STEM: TYPE 416 STAINLESS STEEL
SEAT: BUNA-N

ACTUATOR OPERATION - 80 PSIG CLEAN
LUBRICATED AIR
MAXIMUM 100 PSIG

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED,LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.		922 SERIES HP NO ACT				FILE NO. SUB489	
TITLE BUTTERFLY VALVE 922 LUG -HP NO SERIES ACTUATOR							
DR	DATE	CH'KD	DATE	ENGR	DATE		
MDC	07-18-23	CMM	10-09-20	CMM	10-09-20		

