


MODEL	ACTUATOR	VALVE SIZE	A	B	C	D	E	F	G*	WT
92F60902SR07510	HP075SR10	2	9.82	3.71	8.15	4.72	4.75	5.10	1.70	9.9
92F60925SR07512	HP075SR12	2.5	10.32	3.71	8.15	4.72	5.50	5.60	1.80	11.2
92F60903SR08312	HP083SR12	3	10.88	3.88	8.39	5.08	6.00	5.80	1.80	12.9
92F60904SR09212	HP092SR12	4	12.21	4.27	10.20	5.51	7.50	6.70	2.00	19.8
92F60905SR12510	HP125SR10	5	13.42	5.70	11.30	6.02	8.50	7.40	2.20	38.7
92F60906SR12512	HP125SR12	6	14.89	5.42	13.39	6.89	9.50	8.00	2.20	42.2
92F60908SR16010	HP160SR10	8	17.94	6.85	18.74	8.54	11.75	9.40	2.40	75.1

* DIMENSION TAKEN
OVER SEATS

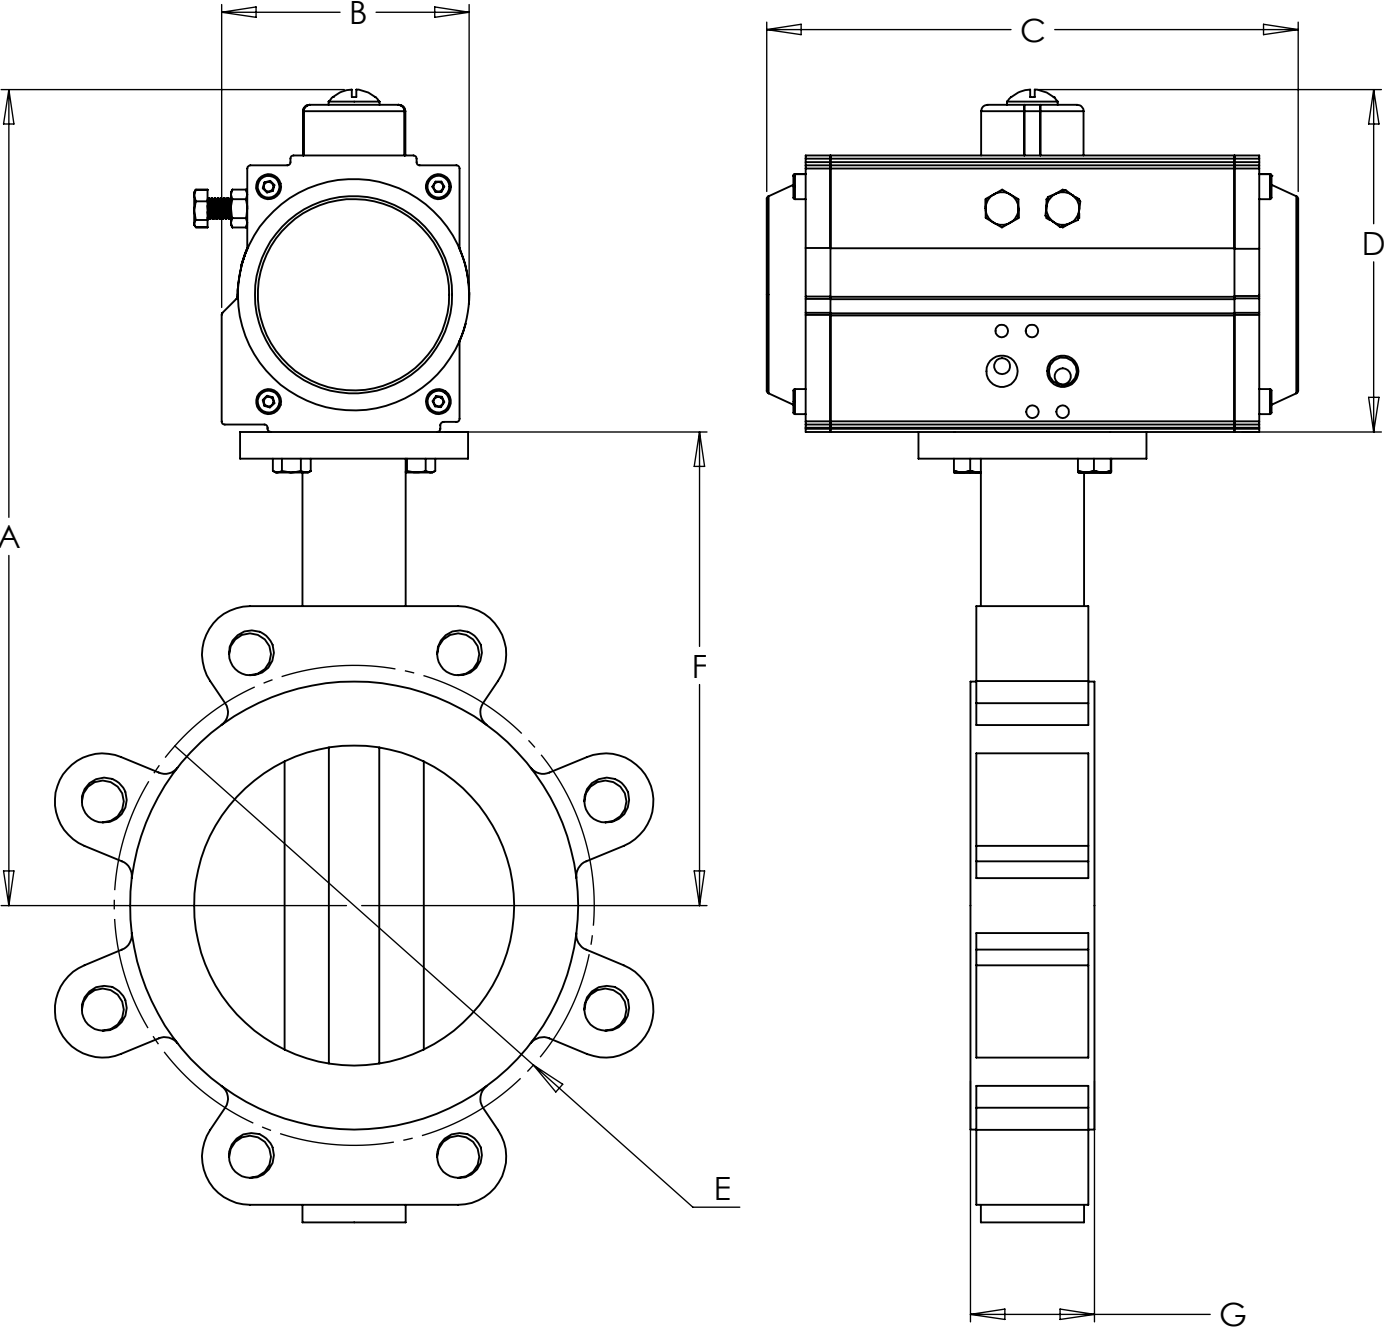

BUTTERFLY VALVE
SERIES 922182570
BODY: DUCTILE IRON LUG STYLE
DISC: NICKEL PLATED DUCTILE IRON
STEM: TYPE 416 STAINLESS STEEL
SEAT: BUNA-N

ACTUATOR OPERATION - 80 PSIG CLEAN
LUBRICATED AIR
MAXIMUM 100 PSIG

UNCONTROLLED
DRAWING


THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED,LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. 922 SERIES HP NC ACT

FILE NO.
SUB488

TITLE
BUTTERFLY VALVE
922 LUG -HP NC SERIES ACTUATOR

DR MDC	DATE 07-18-23	CH'KD CMM	DATE 10-09-20	ENGR CMM	DATE 10-09-20
-----------	------------------	--------------	------------------	-------------	------------------



DynaQuip
Controls