


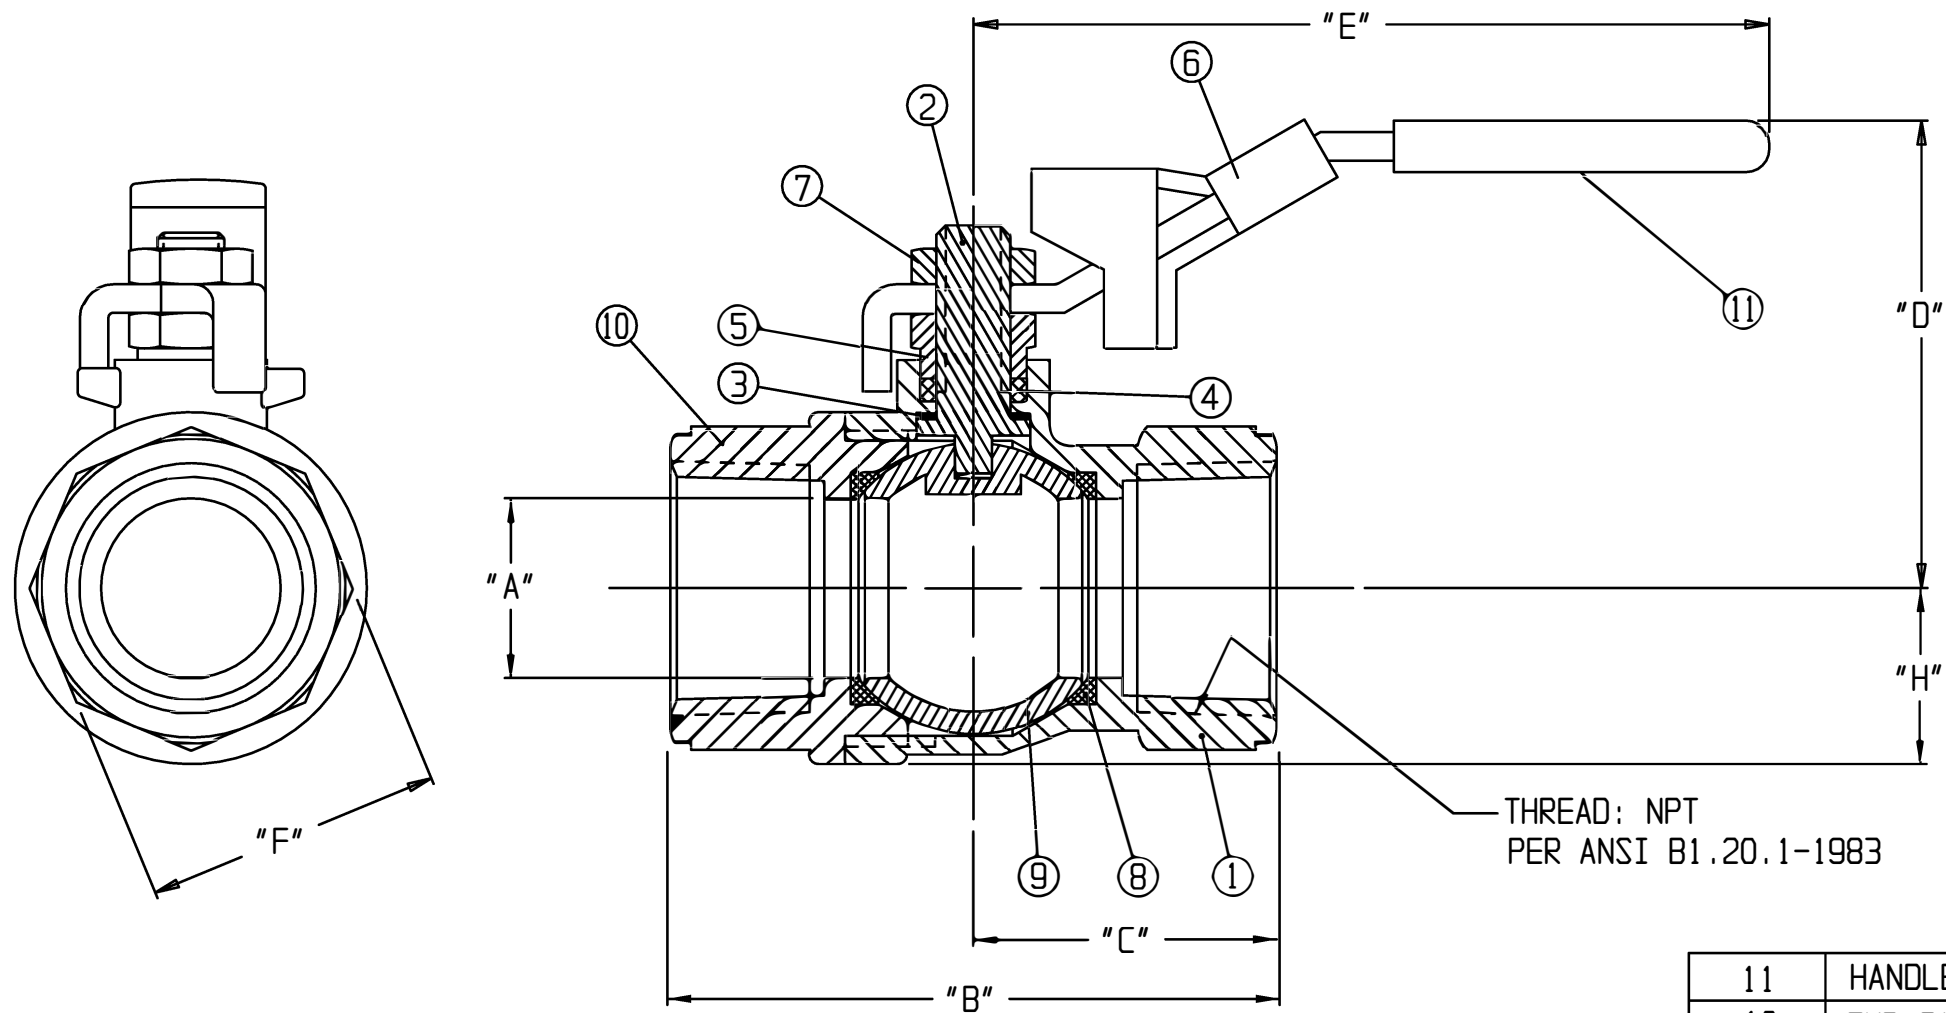

CATALOG NO.	DIMENSIONS							THREAD	PRESSURE RATING	C _v	WT. LBS.
	"A"	"B"	"C"	"D"	"E"	"F"	"H"				
VMH2.A9 1/4	.32	1.77	.89	1.80	3.70	.79 HEX	.50	1/4 - 18	600 CWP 150 SWP	6	.31
VMH2.A9 3/8	.38	1.77	.89	1.80	3.70	.79 HEX	.50	3/8 - 18	600 CWP 150 SWP	11.4	.29
VMH2.A9 1/2	.59	2.32	1.16	1.97	3.70	.98 OCT	.64	1/2 - 14	600 CWP 150 SWP	19	.47
VMH2.A9 3/4	.75	2.52	1.26	2.26	4.51	1.22 OCT	.77	3/4 - 14	600 CWP 150 SWP	34	.74
VMH2.A9 1	.95	3.19	1.59	2.42	4.51	1.58 OCT	.94	1 - 11 1/2	600 CWP 150 SWP	52	1.19
VMH2.A9 1 1/4	1.18	3.66	1.83	3.26	6.16	1.93 OCT	1.16	1 1/4 - 11 1/2	600 CWP 150 SWP	77	1.92
VMH2.A9 1 1/2	1.50	4.02	2.01	3.50	6.16	2.13 OCT	1.40	1 1/2 - 11 1/2	600 CWP 150 SWP	143	2.40
VMH2.A9 2	1.89	4.76	2.38	3.77	6.16	2.68 OCT	1.70	2 - 11 1/2	600 CWP 150 SWP	205	3.94
VMH2.A9 2 1/2	2.52	6.14	3.07	5.20	10.04	3.35 OCT	2.30	2 1/2 - 8	450 CWP	475	8.82
VMH2.A9 3	2.99	6.97	3.48	5.51	10.04	3.90 OCT	2.70	3 - 8	450 CWP	780	13.63
VMH2.A9 4	3.94	8.50	4.25	6.06	10.04	4.92 OCT	3.28	4 - 8	450 CWP	1350	21.50

11	HANDLE GRIP	VINYL, ORANGE w/ BLACK LETTERING
10	END CAP	BRASS, FORGED
9	BALL	BRASS w/ CHROME PLATE
8	BALL SEAT	REINFORCED PTFE, 15% GLASS
7	NUT	STEEL, DACROMET FINISH
6	HANDLE	STEEL, DACROMET FINISH
5	PACKING NUT	BRASS, NICKEL PLATED
4	STEM SEAL	PTFE
3	THRUST WASHER	REINFORCED PTFE, 25% CARBON
2	STEM	BRASS, NICKEL PLATED
1	BODY	BRASS, FORGED
ITEM	PART NAME	MATERIAL

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. VMH2-A90P FILE NO. SUB114

TITLE BALL VALVE 2 PC. BRASS
FPT - FULL PORT
LOCK HANDLE

DR	DATE	CH'KD	DATE	ENGR	DATE
LJH	01-23-03	LJH	01-23-03	LJH	01-23-03

