



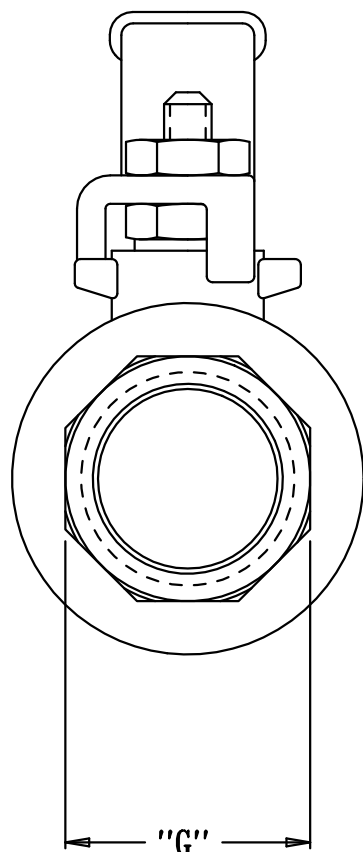

THREAD: NPT MALE
PER ANSI B1.20.1-1983

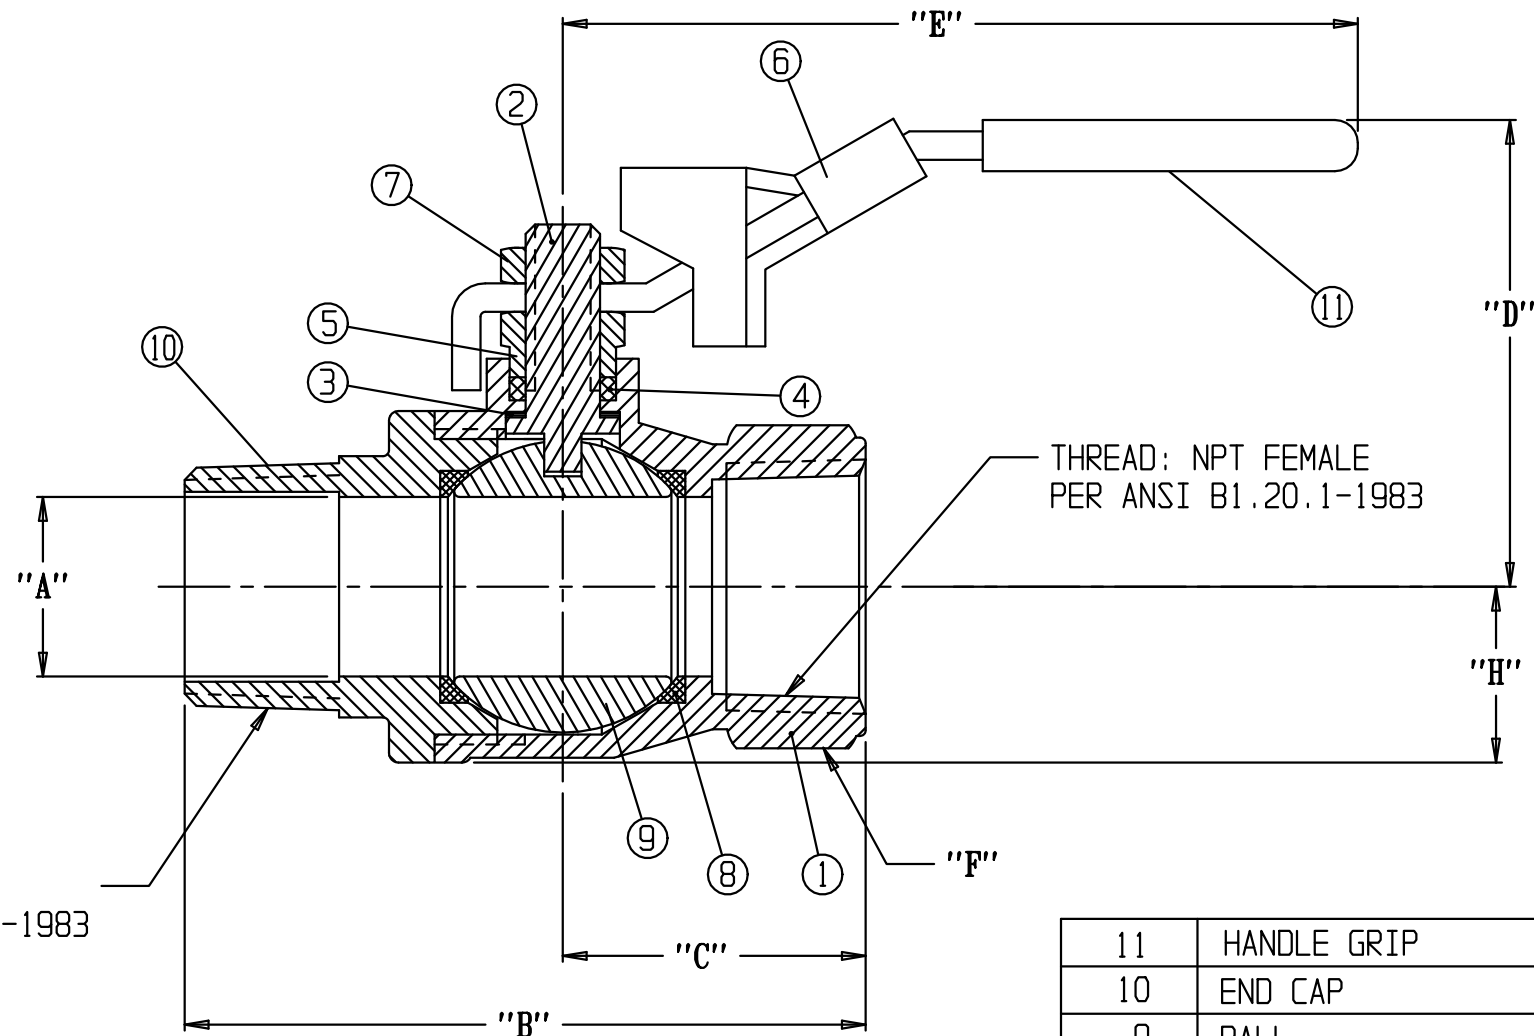

THREAD: NPT FEMALE
PER ANSI B1.20.1-1983

CATALOG NO.	DIMENSIONS								THREAD	PRESSURE RATING	C _v	WT. LBS.
	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"				
VMH2-P90P 1/4	.32	2.22	.89	1.80	3.70	.79 HEX	.71 HEX	.50	1/4-18	600 CWP 150 SWP	6	.38
VMH2-P90P 3/8	.38	2.22	.89	1.80	3.70	.79 HEX	.71 HEX	.50	3/8-18	600 CWP 150 SWP	11.4	.33
VMH2-P90P 1/2	.59	2.76	1.16	1.97	3.70	.98 HEX	.87 HEX	.64	1/2-14	600 CWP 150 SWP	19	.50
VMH2-P90P 3/4	.75	2.99	1.26	2.26	4.51	1.22 HEX	1.06 HEX	.77	3/4-14	600 CWP 150 SWP	34	.78
VMH2-P90P 1	.95	3.64	1.59	2.42	4.51	1.58 OCT	1.38 OCT	.94	1-11 1/2	600 CWP 150 SWP	52	1.16

11	HANDLE GRIP	VINYL, ORANGE w/ BLACK LETTERING
10	END CAP	BRASS, FORGED
9	BALL	BRASS w/ CHROME PLATE
8	BALL SEAT	REINFORCED PTFE, 15% GLASS
7	NUT	STEEL, DACROMET FINISH
6	HANDLE	STEEL, DACROMET FINISH
5	PACKING NUT	BRASS, NICKEL PLATED
4	STEM SEAL	PTFE
3	THRUST WASHER	REINFORCED PTFE, 25% CARBON
2	STEM	BRASS, NICKEL PLATED
1	BODY	BRASS, FORGED
ITEM	PART NAME	MATERIAL

**UNCONTROLLED
DRAWING**

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS. IV-MA

NO. VMH2-P90P **FILE NO. SUB233**

TITLE
BV 2 PC BRASS F.P.
MPT X FPT LOCK HANDLE

DR	DATE	CH'KD	DATE	ENGR	DATE
MJP	07-29-11	MJP	07-29-11	MJP	07-29-11

