
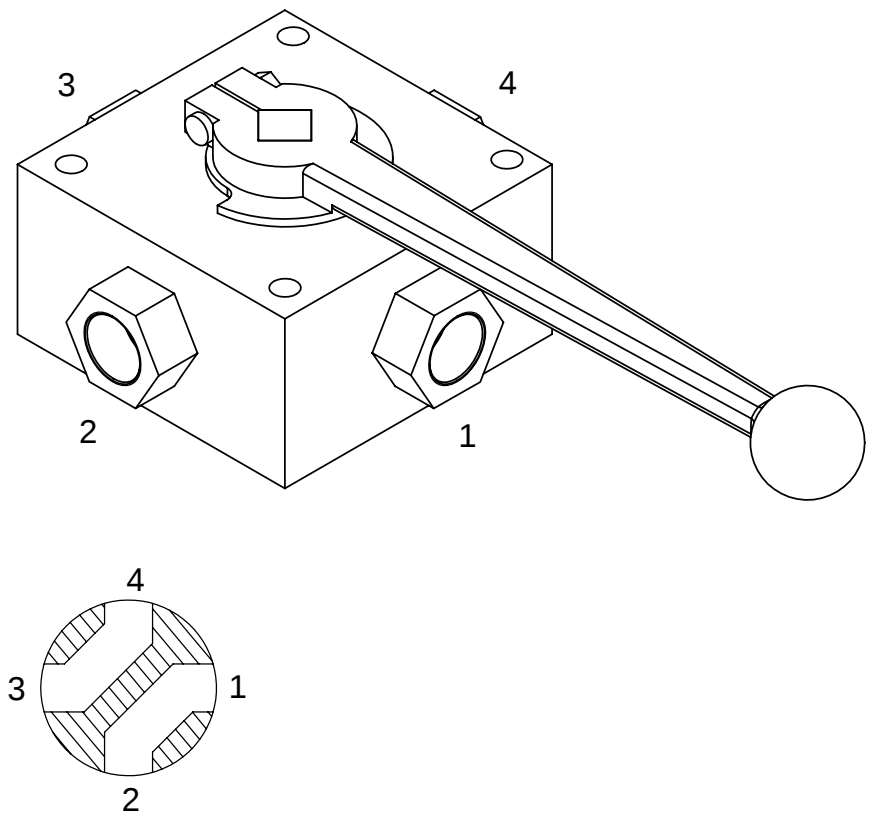


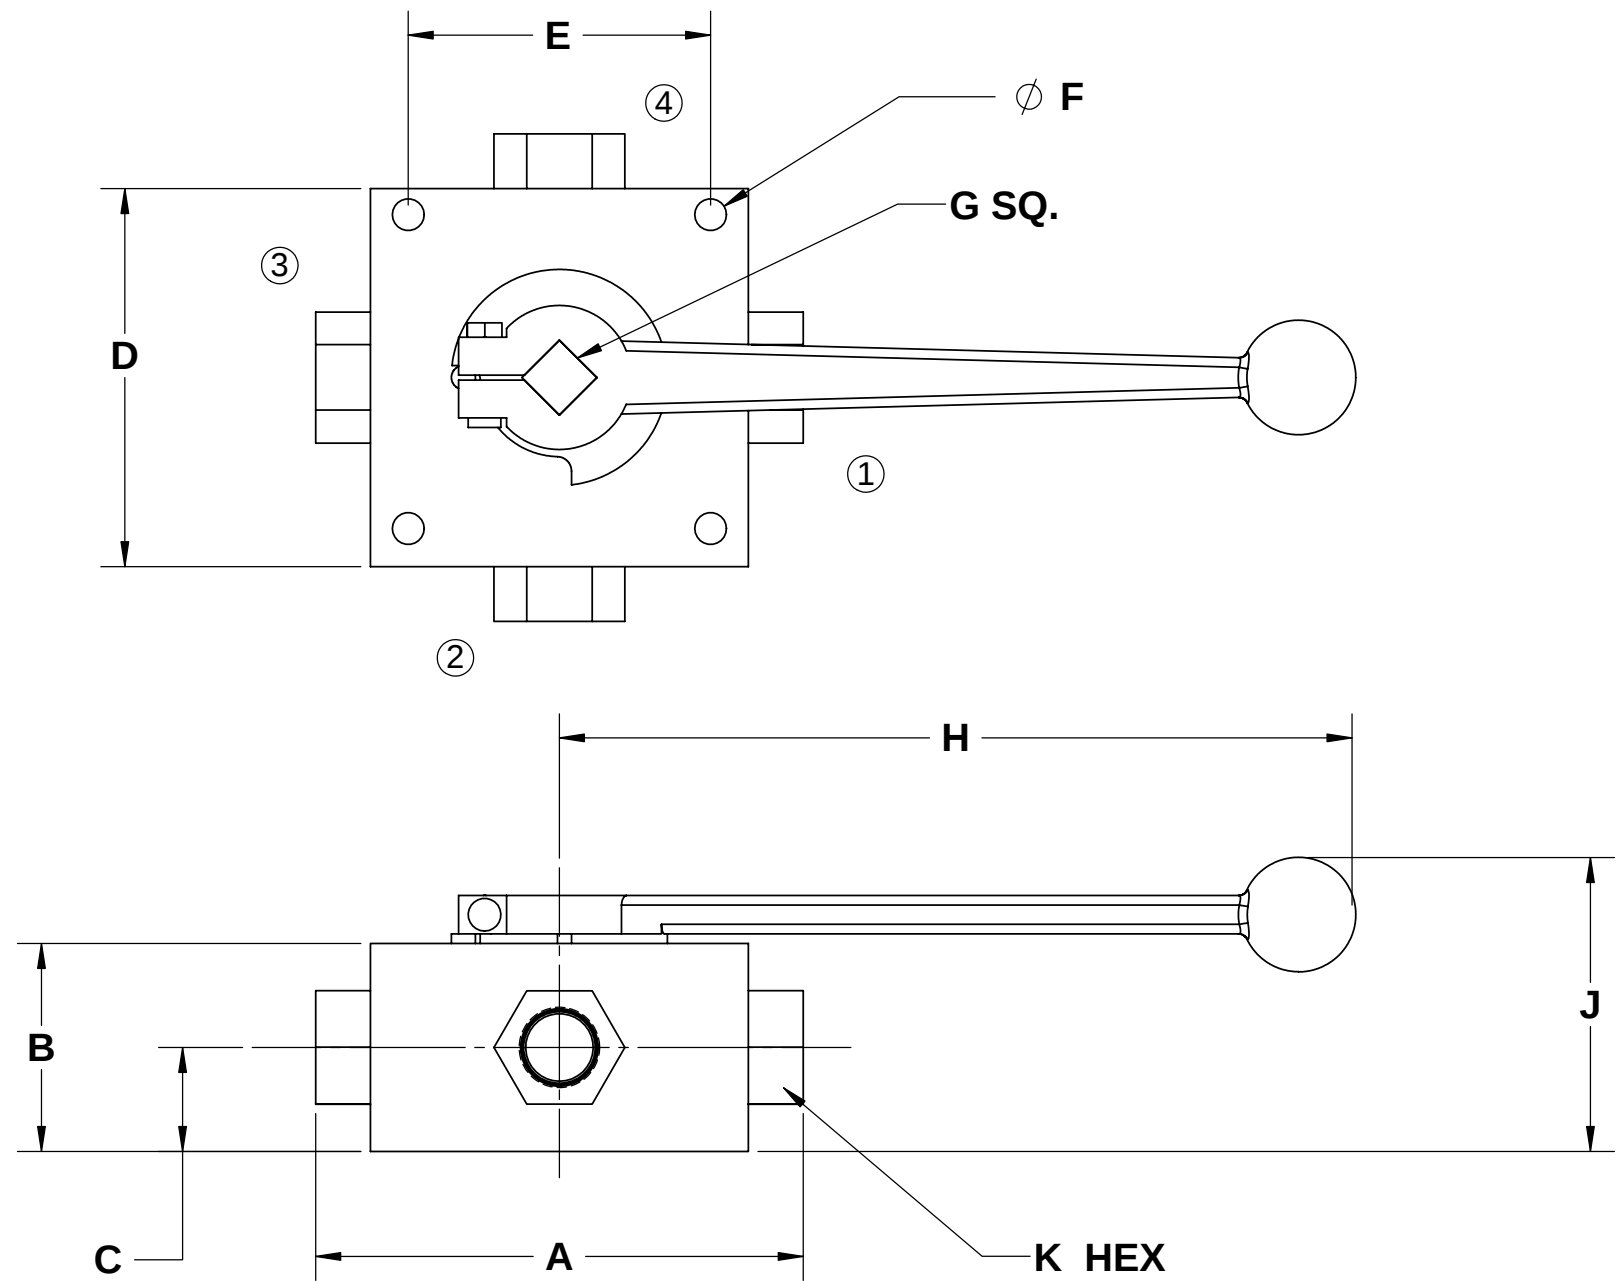

| PART NAME     | MATERIAL                  |
|---------------|---------------------------|
| BODY          | CARBON STEEL              |
| TRUNNION BALL | BRASS, HARD CHROME PLATED |
| SEAT / BALL   | DELRIN (POM)              |
| STEM SEAL     | NITRILE (NBR)             |

| VALVE<br>NUMBER | PORT<br>DIA | DIMENSIONS |      |      |      |       |       |      |       |      |      | PRESSURE<br>RATING<br>PSI | WEIGHT<br>LBS |
|-----------------|-------------|------------|------|------|------|-------|-------|------|-------|------|------|---------------------------|---------------|
|                 |             | A          | B    | C    | D    | E     | F     | G    | H     | J    | K    |                           |               |
| VXEK.A0 1/4     | 0.19        | 4.02       | 1.57 | 0.79 | 2.75 | 2.165 | 0.264 | 0.47 | 7.87  | 2.48 | 0.75 | 7250                      | 3.53          |
| VXEK.A0 3/8     | 0.29        | 4.21       | 1.97 | 0.98 | 3.15 | 2.560 | 0.264 | 0.55 | 7.87  | 2.87 | 0.94 | 7250                      | 5.53          |
| VXEK.A0 1/2     | 0.45        | 5.08       | 2.17 | 1.08 | 3.94 | 3.150 | 0.331 | 0.55 | 7.87  | 3.07 | 1.18 | 7250                      | 9.26          |
| VXEK.A0 3/4     | 0.71        | 5.20       | 2.95 | 1.57 | 3.94 | 3.35  | 0.331 | 0.75 | 11.02 | 4.00 | 1.61 | 4568                      | 12.83         |

UNCONTROLLED  
DRAWING

THIS PRINT IS THE PROPERTY  
OF DYNAQUIP CONTROLS AND  
SHALL NOT BE COPIED,  
REPRODUCED, LOANED,  
OR DISPOSED OF DIRECTLY  
OR INDIRECTLY, NOR USED  
FOR ANY PURPOSE OTHER THAN  
THAT FOR WHICH IT IS  
SPECIFICALLY FURNISHED  
EXCEPT BY WRITTEN  
PERMISSION OF  
DYNAQUIP CONTROLS.

NO. **VXEK.A0** FILE NO. SUB189

TITLE **BALL VALVE - VXEK SERIES  
4-WAY DOUBLE L-PORT  
FEMALE NPT ENDS**

DR L J H DATE 05-30-06 CH'KD L J H DATE 05-30-06 ENGR L J H DATE 05-30-06

