Model	PAS21ARUDA020	PAS22ARUDA020	PAS23ARUDA020	PAS24ARUDA020	PAS25ARUDA034	PAS26ARUDA048	PAS27ARUDA075	PAS38ARUDA075
Size	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT	1 1/4 NPT	1 1/2 NPT	2 NPT
Cv	5.3	8	19	35	50	110	180	210
WOG	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi	3000 psi
A	2.95	2.95	2.95	3.19	3.58	4.33	4.76	5.71
B	0.38	.38	.50	.69	.87	1.14	1.37	1.37
C	1.61	1.61	1.61	1.72	2.11	2.32	2.96	2.96
D	5.23	5.23	5.23	5.34	6.36	7.03	8.04	8.04
E	2.81	2.81	2.81	2.81	3.27	3.74	4.06	4.06
F	5.79	5.79	5.79	5.79	6.50	7.17	8.19	8.19
G	3.62	3.62	3.62	3.62	4.25	4.71	5.08	5.08
MAX Dif PSI	1500	1500	1500	1500	1500	1500	1500	1500
Actuator	UP020DA	UP020DA	UP020DA	UP020DA	UP034DA	UP048DA	UP075DA	UP075DA
Ambient Temp	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F	-4° / 176°F
Media Temp	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F	-20° / 185°F
Wt. lbs	4.71	4.71	4.8	5.20	7.73	11.2	16.03	18.43

FOR APPLICATIONS EXCEEDING LISTED TEMPERATURES, CALL TO DISCUSS OPTIONS

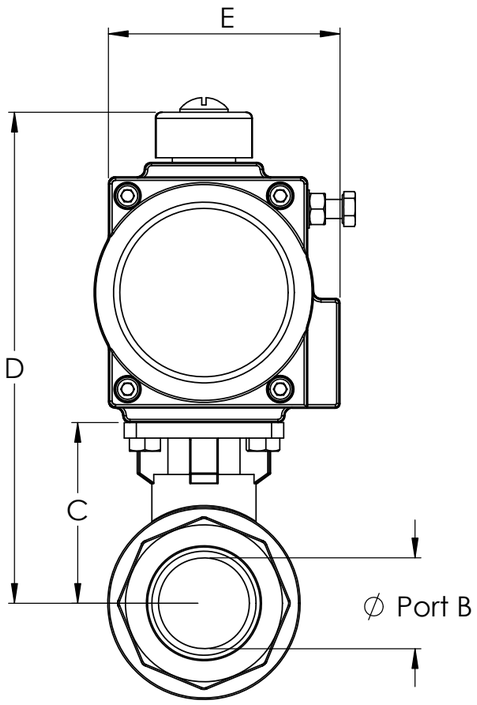

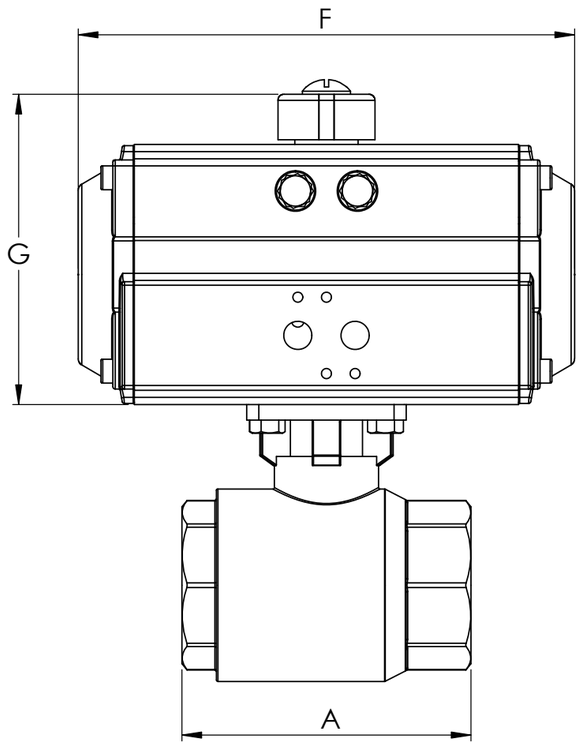

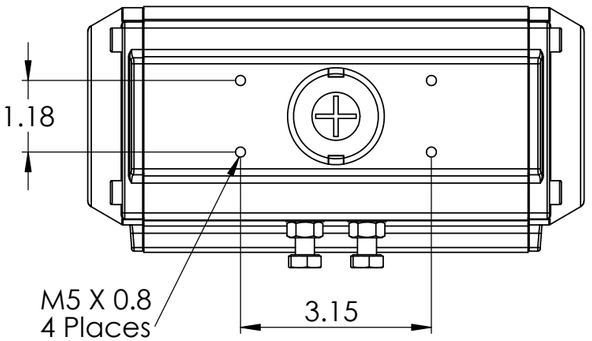

MODEL NUMBERS LISTED ABOVE INDICATE SS BALL VALVES - PAS...

FOR CARBON STEEL BALL VALVES, MODEL NUMBERS START - PAC...

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED,LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. PAS/ PAC SERIES

FILE NO. Sub545

TITLE

BALL VALVE
FULL PORT HIGH PRESSURE - NPT
UP-DA ACTUATOR

DR	DATE	CH'KD	DATE	ENGR	DATE
MDC	08-26-24	MDC	08-26-24	MDC	08-26-24

DynaQuip®

CONTROLS CORPORATION