
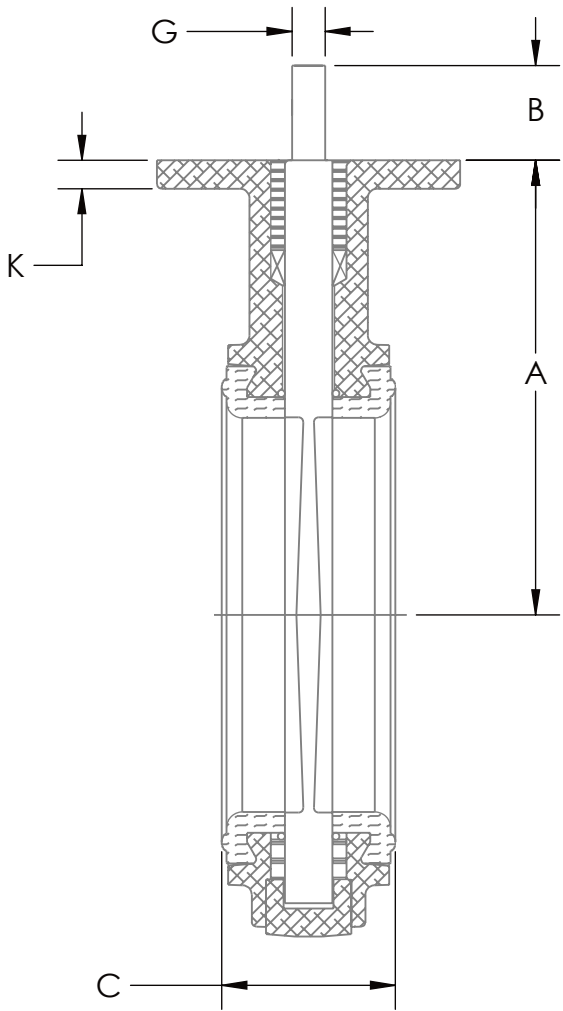
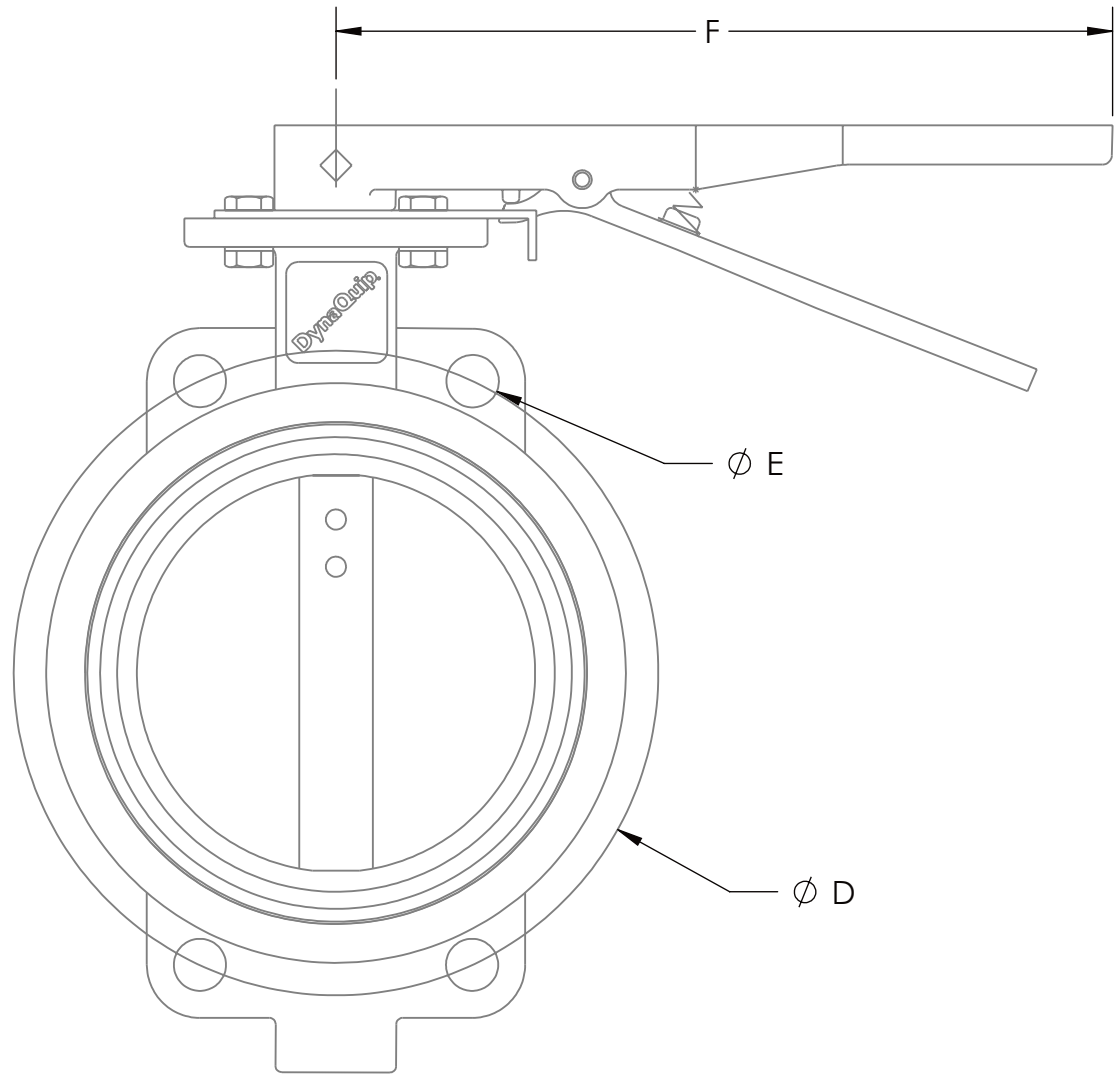
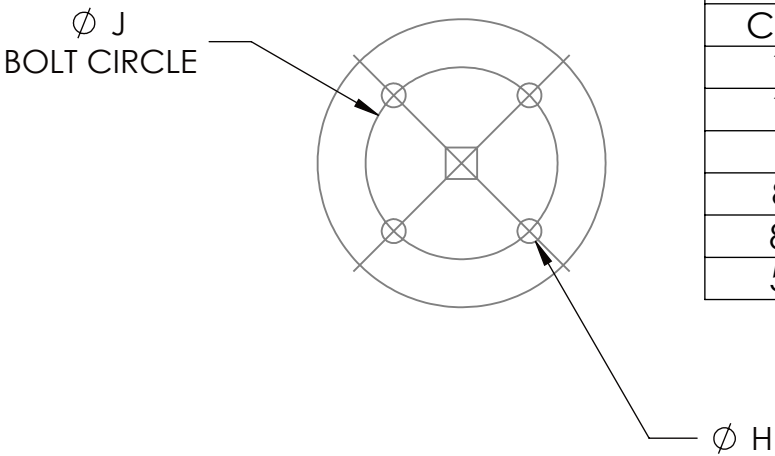


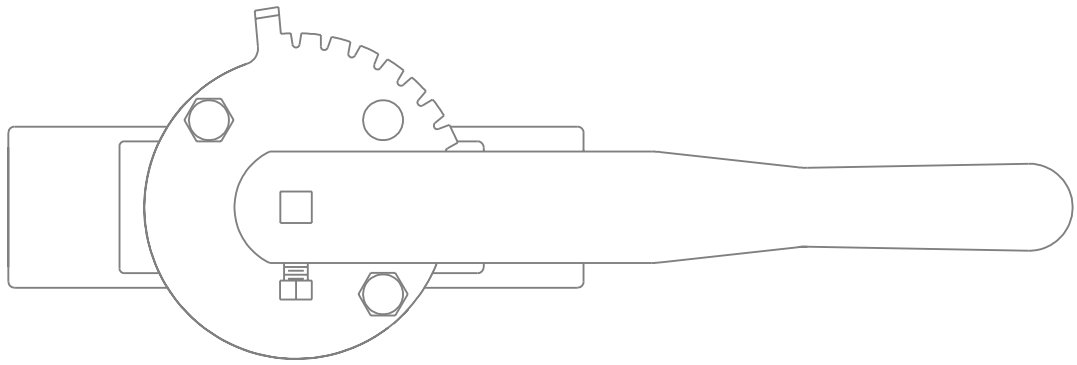

VALVE TRIM			
CODE	BODY	DISC	STEM
182	DUCTILE IRON	DUCTILE IRON, NICKEL PLATED	416 SS
185	DUCTILE IRON	ALUMINUM BRONZE	416 SS
170	DUCTILE IRON	DUCTILE IRON, NYLON COATED	416 SS
852	DUCTILE IRON	POLISHED SS	416 SS
822	DUCTILE IRON	316 SS	416 SS
508	DUCTILE IRON	TFE 255 SS	431 SS

SEAT TRIM		
CODE	SEAT MATERIAL	COLOR
515	EPDM	BLACK
540	VITON	BLACK
570	BUNA	BLACK
482	PTFE/EPDM FOOD GRADE	WHITE
650	TFE/EPDM	WHITE
652	TFE/BUNA	WHITE
715	EPDM - HI-TEMP	BLACK

OPERATOR	
CODE	OPERATOR STYLE
--	BARE STEM
H10	LOCKING HANDLE
GI	GEAR OPERATOR

482 'FOOD GRADE' MUST BE PAIRED WITH THE POLISHED SS DISC (852/853) TO MEET FDA STANDARDS FOR FOOD CONTACT

3 - 900 - XXX XXX XXX

SIZE
SERIES
VALVE TRIM
SEAT MATERIAL
OPERATOR

SIZE	A	B	C	D	E	F	G	H	J	K	WT LBS
1 1/2	4.90	1.18	1.30	3.88	4 X .7	8.90	.354	.30	1.969	.39	4.2
2	5.10	1.18	1.70	4.75	4 X .9	8.90	.354	.30	1.969	.43	4.2
2 1/2	5.60	1.18	1.80	5.50	4 X .7	8.90	.354	.30	1.969	.43	5.5
3	5.80	1.18	1.80	6.00	4 X .7	8.90	.354	.30	1.969	.43	6.1
4	6.70	1.18	2.00	7.50	4 X .7	10.20	.433	.41	2.756	.47	9.0
5	7.40	1.18	2.20	8.50	4 X .9	10.20	.551	.41	2.756	.51	12.6
6	8.00	1.18	2.20	9.50	4 X .9	10.20	.551	.41	2.756	.51	15.1
8	9.40	1.42	2.40	11.75	4 X 1.0	-	.669	.48	4.016	.59	27.0
10	10.70	1.42	2.70	14.25	4 X 1.0	-	.866	.48	4.016	.59	40.8
12	12.00	1.42	3.10	17.00	4 X 1.0	-	.866	.48	4.016	.59	60.7

UNCONTROLLED
DRAWING


THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. 900 Series (1 of 2) FILE NO. Sub483


TITLE
Butterfly Valve

DR MDC DATE 08-12-25 CH'KD CMM DATE 10-07-20 ENGR CMM DATE 10-07-20



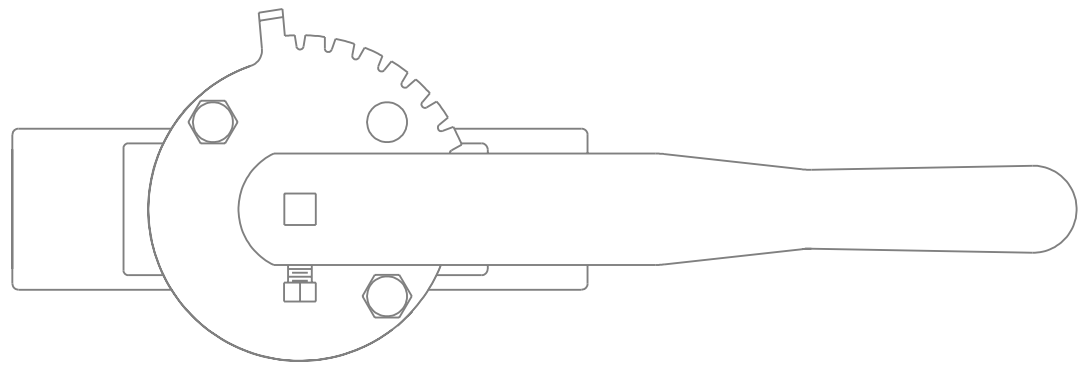

Ø J
BOLT CIRCLE





VALVE TRIM			
CODE	BODY	DISC	STEM
705	255 SS	TFE 255 SS	431 SS
755	255 SS	255 SS	431 SS
853	255 SS	POLISHED SS	431 SS

SEAT TRIM		
CODE	SEAT MATERIAL	COLOR
515	EPDM	BLACK
540	VITON	BLACK
570	BUNA	BLACK
482	PTFE/EPDM FOOD GRADE	WHITE
650	TFE/EPDM	WHITE
652	TFE/BUNA	WHITE
715	EPDM - HI-TEMP	BLACK

OPERATOR	
CODE	OPERATOR STYLE
--	BARE STEM
H10	LOCKING HANDLE
GI	GEAR OPERATOR

482 'FOOD GRADE' MUST BE PAIRED WITH THE POLISHED SS DISC (852/853) TO MEET FDA STANDARDS FOR FOOD CONTACT

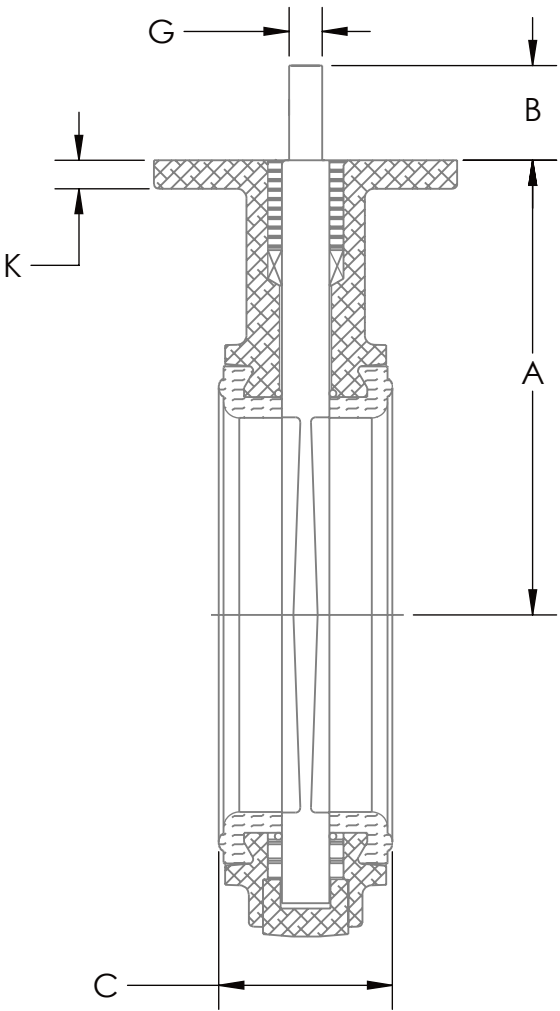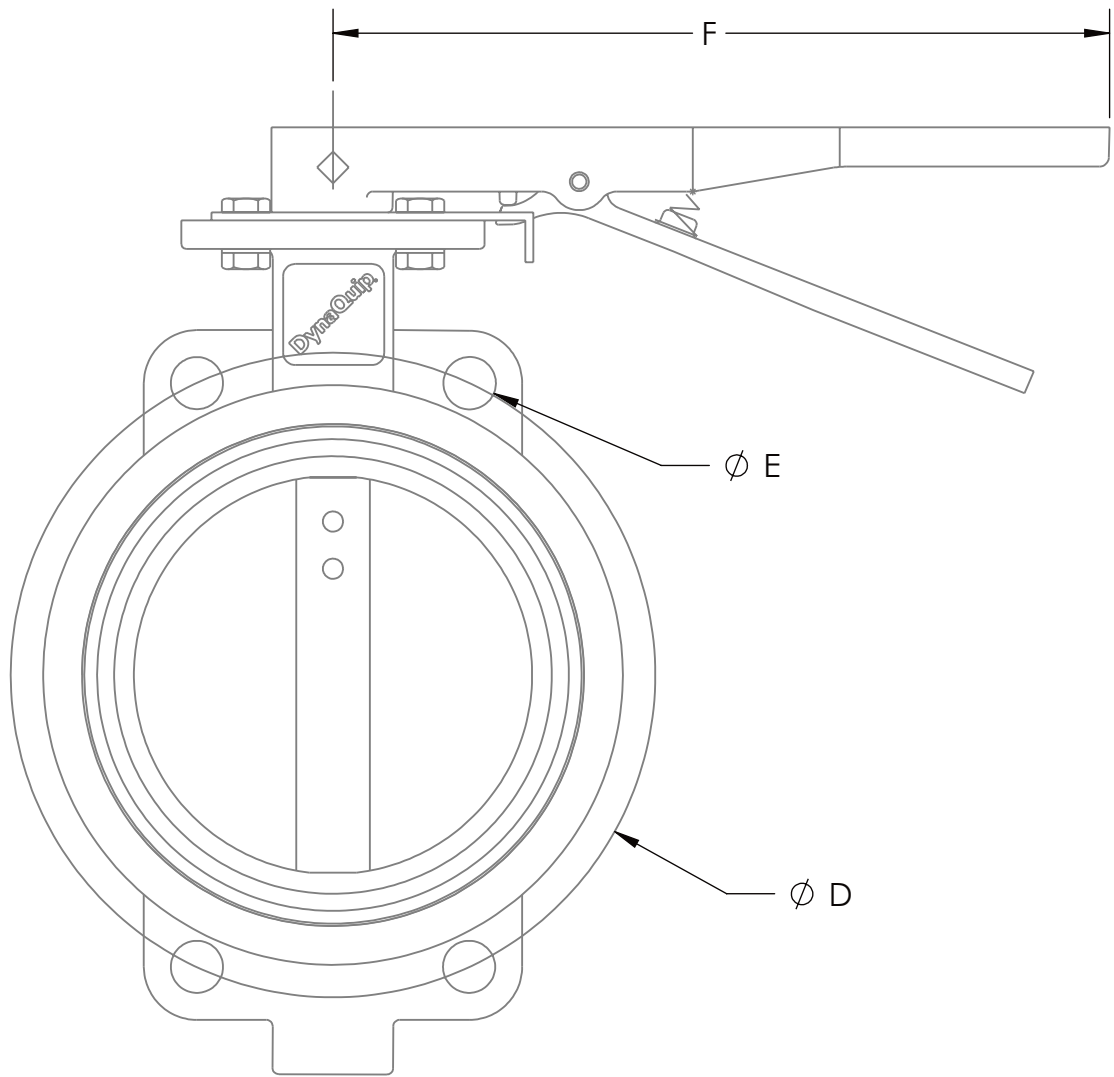

3 - 900 - XXX XXX XXX

SIZE
SERIES
VALVE TRIM
SEAT MATERIAL
OPERATOR

SIZE	A	B	C	D	E	F	G	H	J	K	WT LBS
2	5.10	1.18	1.70	4.75	4 X .9	8.90	.354	.30	1.969	.43	4.2
2 1/2	5.60	1.18	1.80	5.50	4 X .7	8.90	.354	.30	1.969	.43	5.5
3	5.80	1.18	1.80	6.00	4 X .7	8.90	.433	.30	1.969	.43	6.1
4	6.70	1.18	2.00	7.50	4 X .7	10.20	.433	.41	2.756	.47	9.0
5	7.40	1.18	2.20	8.50	4 X .9	10.20	.551	.41	2.756	.51	12.6
6	8.00	1.18	2.20	9.50	4 X .9	10.20	.551	.41	2.756	.51	15.1
8	9.40	1.42	2.40	11.75	4 X 1.0	-	.669	.48	4.016	.59	27.0
10	10.70	1.42	2.70	14.25	4 X 1.0	-	.866	.48	4.016	.59	40.8
12	12.00	1.42	3.10	17.00	4 X 1.0	-	.866	.48	4.016	.59	60.7

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. 900 Series (2 of 2) FILE NO. Sub483

TITLE
Butterfly Valve

DR MDC DATE 08-12-25 CH'KD CMM DATE 10-07-20 ENGR CMM DATE 10-07-20

